September 2004



5V 32K X 8 CMOS SRAM (Common I/O)

Features

- Pin compatible with AS7C256
- Industrial and commercial temperature options
- Organization: 32,768 words × 8 bits
- High speed
 - 10/12/15/20 ns address access time
 - 5, 6, 7, 8 ns output enable access time
- Very low power consumption: ACTIVE
 - 412.5 mW max @ 10 ns

Logic block diagram

- Very low power consumption: STANDBY
 - 11 mW max CMOS I/O
- Easy memory expansion with $\overline{\text{CE}}$ and $\overline{\text{OE}}$ inputs


- TTL-compatible, three-state I/O
- 28-pin JEDEC standard packages - 300 mil SOJ
- 8 × 13.4 mm TSOP 1
- ESD protection \geq 2000 volts
- Latch-up current $\ge 200 \text{ mA}$
- 2.0V Data retention


V_{CC}-GND-Input buffer रम् A0 - I/O7 A1 decoder A2 256 X 128 X 8 Sense amp A3 Array A4 Row (262,144) A5 · A6 I/O0 Α7 - 🎧 – WE Column decoder Control OE circuit CE A A A A A 10 11 12 13 14 A 9 A 8

Pin arrangement

28-pin TSOP 1 (8×13.4 mm)

28-pin SOJ (300 mil)





Selection guide

	-10	-12	-15	-20	Unit
Maximum address access time	10	12	15	20	ns
Maximum output enable access time	5	6	7	8	ns
Maximum operating current	75	70	65	60	mA
Maximum CMOS standby current	2	2	2	2	mA

Functional description

The AS7C256A is a 5.0V high-performance CMOS 262,144-bit Static Random-Access Memory (SRAM) device organized as 32,768 words \times 8 bits. It is designed for memory applications requiring fast data access at low voltage, including PentiumTM, PowerPCTM, and portable computing. Alliance's advanced circuit design and process techniques permit 5.0V operation without sacrificing performance or operating margins.

The device enters *standby mode* when \overline{CE} is high. CMOS standby mode consumes ≤ 11 mW. Normal operation offers 75% power reduction after initial access, resulting in significant power savings during CPU idle, suspend, and stretch mode.

Equal address access and cycle times (t_{AA} , t_{RC} , t_{WC}) of 10/12/15/20 ns with output enable access times (t_{OE}) of 5, 6, 7, 8 ns are ideal for high-performance applications. The chip enable (\overline{CE}) input permits easy memory expansion with multiple-bank memory organizations.

A write cycle is accomplished by asserting chip enable ($\overline{\text{CE}}$) and write enable ($\overline{\text{WE}}$) LOW. Data on the input pins I/O0-I/O7 is written on the rising edge of $\overline{\text{WE}}$ (write cycle 1) or $\overline{\text{CE}}$ (write cycle 2). To avoid bus contention, external devices should drive I/O pins only after outputs have been disabled with output enable ($\overline{\text{OE}}$) or write enable ($\overline{\text{WE}}$).

A read cycle is accomplished by asserting chip enable (\overline{CE}) and output enable (\overline{OE}) LOW, with write enable (\overline{WE}) high. The chip drives I/O pins with the data word referenced by the input address. When chip enable or output enable is high, or write enable is low, output drivers stay in high-impedance mode.

All chip inputs and outputs are TTL-compatible. Operation is from a single 5.0 ± 0.5 V supply. The AS7C256A is packaged in high volume industry standard packages.

Parameter	Symbol	Min	Max	Unit
Voltage on V _{CC} relative to GND	V _{t1}	-0.5	+7.0	V
Voltage on any pin relative to GND	V _{t2}	-0.5	V _{CC} + 0.5	V
Power dissipation	P _D	_	1.0	W
Storage temperature (plastic)	T _{stg}	-65	+150	°C
Ambient temperature with V_{CC} applied	T _{bias}	-55	+125	°C
DC current into outputs (low)	I _{OUT}	-	20	mA

Absolute maximum ratings

Stresses greater than those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Truth table

CE	WE	OE	Data	Mode
Н	Х	Х	High Z	Standby (I_{SB}, I_{SB1})
L	Н	Н	High Z	Output disable (I _{CC})
L	Н	L	D _{OUT}	Read (I _{CC})
L	L	Х	D _{IN}	Write (I _{CC})

Key: X = Don't care, L = Low, H = High



Recommended operating conditions

Parameter	Symbol	Min	Typical	Max	Unit	
Supply voltage		V _{CC}	4.5	5.0	5.5	V
Input voltage	V _{IH} **	2.2	_	V _{CC} +0.5	V	
input voltage		v_{IL}^{*}	-0.5	_	0.8	V
Ambient operating temperature	commercial	T _A	0	_	70	°C
Amolent operating temperature	industrial	T _A	-40	_	85	°C

* V_{IL} min = -1.0V for pulse width less than 5ns. V_{IH} max = V_{CC} + 2.0V for pulse width less than 5ns.

DC operating characteristics (over the operating range)¹

			-1	-10 -12		-1	15	-2	20			
Parameter	Sym	Test conditions	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Input leakage current	I _{LI}	$V_{CC} = Max,$ $V_{in} = GND \text{ to } V_{CC}$	_	1	_	1	_	1	_	1	μΑ	
Output leakage current	I _{LO}	$V_{CC} = Max,$ $V_{OUT} = GND$ to V_{CC}	_	1	_	1	_	1	_	1	μA	
Operating power supply current	I _{CC}	$V_{CC} = Max, \overline{CE} \le V_{IL}$ $f = f_{Max}, I_{OUT} = 0mA$	_	75	-	70		65	_	60	mA	
Standby power	I _{SB}	$V_{CC} = Max, \overline{CE} \ge V_{IH}$ $f = f_{Max}$	-	45	Ι	45	Ι	40	_	40	mA	
supply current		$\begin{split} & V_{CC} = Max, \ \overline{CE} \geq V_{CC} - 0.2V \\ & V_{IN} \leq 0.2V \ \text{or} \\ & V_{IN} \geq V_{CC} - 0.2V, \ f = 0 \end{split}$	_	2.0	Ι	2.0		2.0	_	2.0	mA	
Output voltage	V _{OL}	$I_{OL} = 8 \text{ mA}, V_{CC} = Min$	-	0.4	_	0.4	_	0.4	_	0.4	V	4
Sulput voltage	V _{OH}	$I_{OH} = -4 \text{ mA}, V_{CC} = Min$	2.4	_	2.4	—	2.4	—	2.4	-	V	4

Capacitance (f = 1MHz, T_a = room temperature, V_{CC} = NOMINAL)⁴

Parameter	Symbol	Signals	Test conditions	Max	Unit
Input capacitance	C _{IN}	A, \overline{CE} , \overline{WE} , \overline{OE}	$V_{in} = 0V$	5	pF
I/O capacitance	C _{I/O}	I/O	$V_{in} = V_{out} = 0V$	7	pF

AS7C256A



		-10		-12		-]	15	-2	20		
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Read cycle time	t _{RC}	10	_	12	_	15	_	20	_	ns	
Address access time	t _{AA}	_	10	_	12	_	15	-	20	ns	2
Chip enable (\overline{CE}) access time	t _{ACE}	-	10	-	12	_	15	-	20	ns	2
Output enable (\overline{OE}) access time	t _{OE}	_	5	-	6	-	7	_	8	ns	
Output hold from address change	t _{OH}	3	-	3	-	3	—	3		ns	4
$\overline{\text{CE}}$ LOW to output in low Z	t _{CLZ}	3	-	3	-	3	—	3	-	ns	3,4
$\overline{\text{CE}}$ HIGH to output in high Z	t _{CHZ}	_	3	-	3	-	4	-	5	ns	3,4
\overline{OE} LOW to output in low Z	t _{OLZ}	0	-	0	-	0	—	0	-	ns	3,4
OE HIGH to output in high Z	t _{OHZ}	_	3	-	3	-	4	-	5	ns	3,4
Power up time	t _{PU}	0	-	0	-	0	—	0	-	ns	3,4
Power down time	t _{PD}	—	10	-	12	—	15	_	20	ns	3,4

<u>Read cycle (over the operating range)^{2,8}</u>

Key to switching waveforms


Rising input

nput


____ Falling input

Undefined output/don't care

Read waveform 1 (address controlled)^{2,5,6,8}

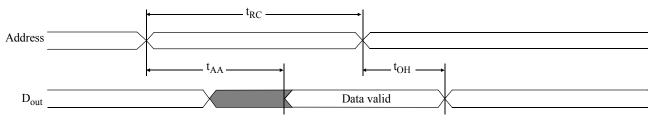


Read waveform 2 (CE controlled)^{2,5,7,8}

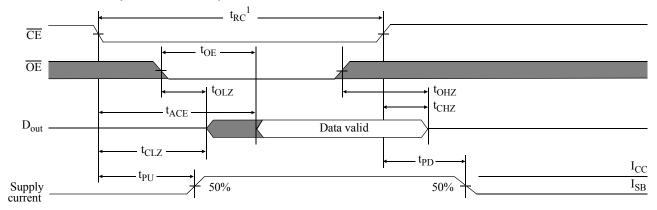


		-]	10	-]	12	-]	15	-2	20		
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Write cycle time	t _{WC}	10	_	12	—	15	-	20	-	ns	
Chip enable to write end	t _{CW}	8	—	8	—	10	—	12	—	ns	
Address setup to write end	t _{AW}	8	_	8	_	10	_	12	_	ns	
Address setup time	t _{AS}	0	—	0	—	0	-	0	—	ns	
Write pulse width	t _{WP}	7	—	8	-	9	-	12	-	ns	
Write recovery time	t _{WR}	0	_	0	_	0	_	0	_	ns	
Address hold from end of write	t _{AH}	0	_	0	_	0	_	0	_	ns	
Data valid to write end	t _{DW}	5	—	6	-	8	-	10	-	ns	
Data hold time	t _{DH}	0	—	0	—	0	-	0	—	ns	3,4
Write enable to output in high Z	t _{WZ}		5		6		7	-	8	ns	3,4
Output active from write end	t _{OW}	3	_	3	_	3	_	3	_	ns	3,4

Write cycle (over the operating range)⁹

Write waveform 1 (WE controlled)⁹

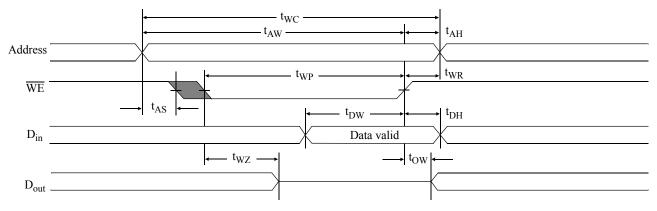


Write waveform 2 (CE controlled)⁹

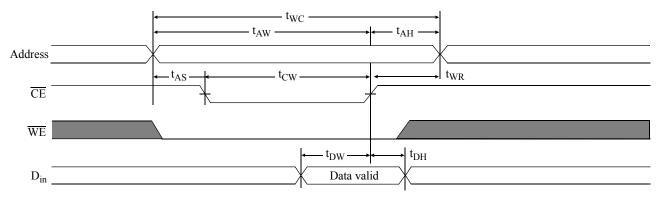



AC test conditions

- Output load: see Figure B
- Input pulse level: GND to V_{CC} See Figure A.
- Input rise and fall times: 2 ns. See Figure A.
- Input and output timing reference levels: 1.5V.

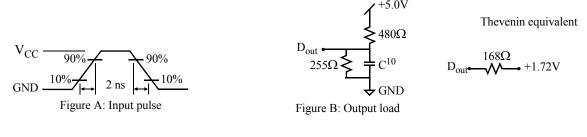


Notes

- 1 During V_{CC} power-up, a pull-up resistor to V_{CC} on \overline{CE} is required to meet I_{SB} specification.
- 2 For test conditions, see AC Test Conditions, Figures A, B.
- 3 These parameters are specified with CL = 5pF, as in Figures B. Transition is measured $\pm 500mV$ from steady-state voltage.
- 4 This parameter is guaranteed, but not tested.
- 5 $\overline{\text{WE}}$ is High for read cycle.
- 6 $\overline{\text{CE}}$ and $\overline{\text{OE}}$ are Low for read cycle.
- 7 Address valid prior to or coincident with $\overline{\text{CE}}$ transition Low.
- 8 All read cycle timings are referenced from the last valid address to the first transitioning address.
- 9 All write cycle timings are referenced from the last valid address to the first transitioning address.
- 10 C=30pF, except on High Z and Low Z parameters, where C=5pF.


Package diagrams

28-pin SOJ

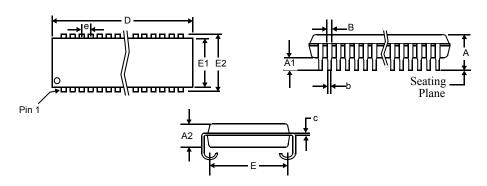

	28-pi	n SOJ					
	Min	Max					
	in inches						
Α	0.128	0.148					
A1	0.026	-					
A2	0.095	0.105					
B	0.026	0.032					
b	0.016	0.020					
с	0.007	0.010					
D	0.720	0.730					
E	0.255	0.275					
E 1	0.295	0.305					
E2	0.330	0.340					
e	0.050	BSC					

28-pin TSOP1

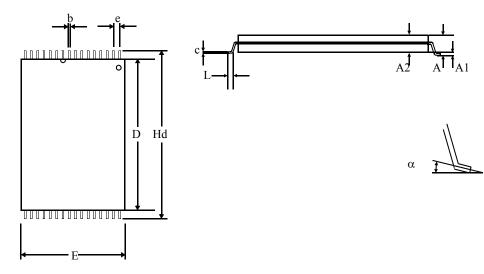

	28-pin	TSOP1		
	8×13.	4 mm		
	Min	Max		
Α	1.00	1.20		
A1	0.05	0.15		
A2	0.91 1.05			
b	0.17	0.27		
с	0.10	0.20		
D	11.70	11.90		
e	0.55 n	ominal		
E	7.90	8.10		
Hd	13.20	13.60		
L	0.50	0.70		
α	0°	5°		



Ordering information

Package / Access time	Temperature	10 ns	12 ns	15 ns	20 ns
Plastic SOJ, 300 mil	Commercial	AS7C256A-10JC	AS7C256A-12JC	AS7C256A-15JC	AS7C256A-20JC
1 lastic 505, 500 lill	Industrial	AS7C256A-10JI	AS7C256A-12JI	AS7C256A-15JI	AS7C256A-20JI
TSOP 8x13.4mm	Commercial	AS7C256A-10TC	AS7C256A-12TC	AS7C256A-15TC	AS7C256A-20TC
1501 8713.4000	Industrial	AS7C256A-10TI	AS7C256A-12TI	AS7C256A-15TI	AS7C256A-20TI

Note: Add suffix 'N'to the above part number for lead free parts. (Ex. AS7C256A-10JIN)

Part numbering system

AS7C	256A	-XX	X	C or I	X
SRAM prefix	Device number	Access time	Packages: J = SOJ 300 mil	Temperature range: $C = 0 \ {}^{o}C$ to $70 \ {}^{0}C$	N= Lead Free Part
Ĩ			T = TSOP 8x13.4mm	I = -40C to 85C	



Alliance Semiconductor Corporation 2575, Augustine Drive, Santa Clara, CA 95054 Tel: 408 - 855 - 4900 Fax: 408 - 855 - 4999

www.alsc.com

Copyright © Alliance Semiconductor All Rights Reserved Part Number: AS7C256A Document Version: v.1.2

© Copyright 2003 Alliance Semiconductor Corporation. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warrantee to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warrantes related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life suporting systems i

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alliance Memory:

AS7C256A-10TIN AS7C256A-12JIN AS7C256A-12JCN AS7C256A-12TCN AS7C256A-20JCN AS7C256A-15JCN AS7C256A-12TIN AS7C256A-10JCN AS7C256A-15TCN AS7C256A-10JIN AS7C256A-15JIN AS7C256A-15JCNTR AS7C256A-20JINTR AS7C256A-10TCNTR AS7C256A-10JCNTR AS7C256A-20JIN AS7C256A-15TINTR AS7C256A-15TIN AS7C256A-20TCNTR AS7C256A-20TINTR AS7C256A-15TCNTR AS7C256A-20TCN AS7C256A-12TINTR AS7C256A-10JINTR AS7C256A-20TIN AS7C256A-10TINTR AS7C256A-15JINTR AS7C256A-20JCNTR AS7C256A-10TCN AS7C256A-12TCNTR AS7C256A-12JCNTR AS7C256A-12JINTR