

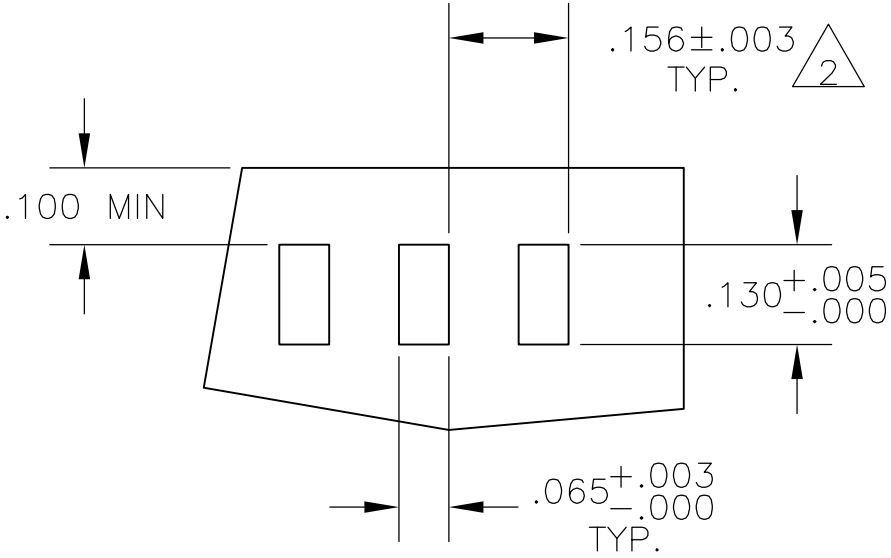
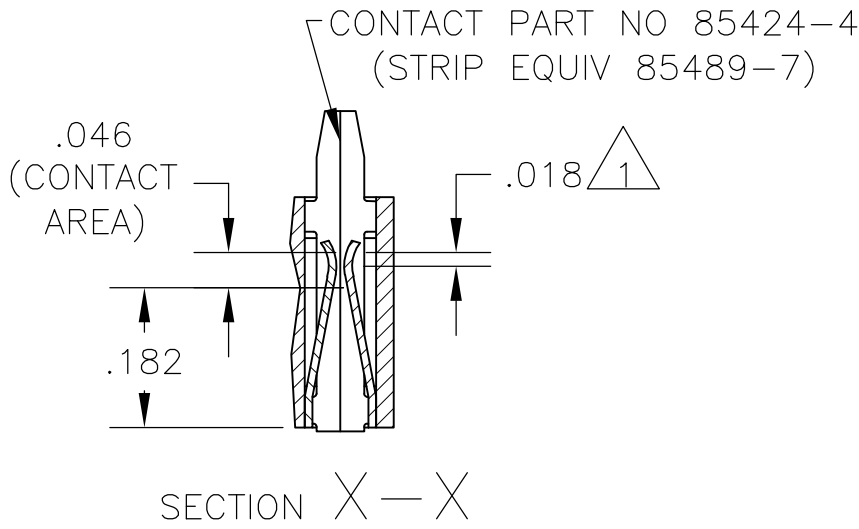
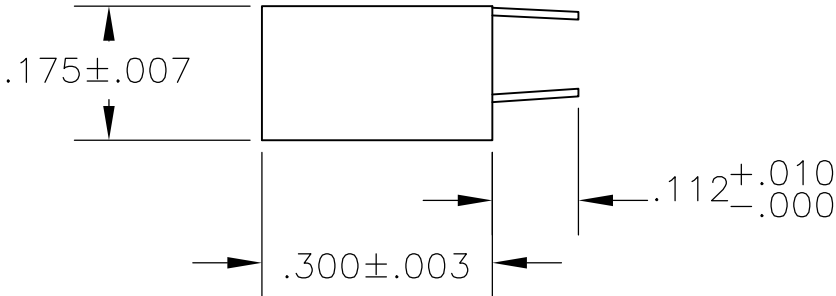


LOC	DIST	REVISIONS				
AD	OO	P	LTR	DESCRIPTION	DATE	APVD
			K1	REVISED PER ECO-10-000443	11JAN10	KK AEG

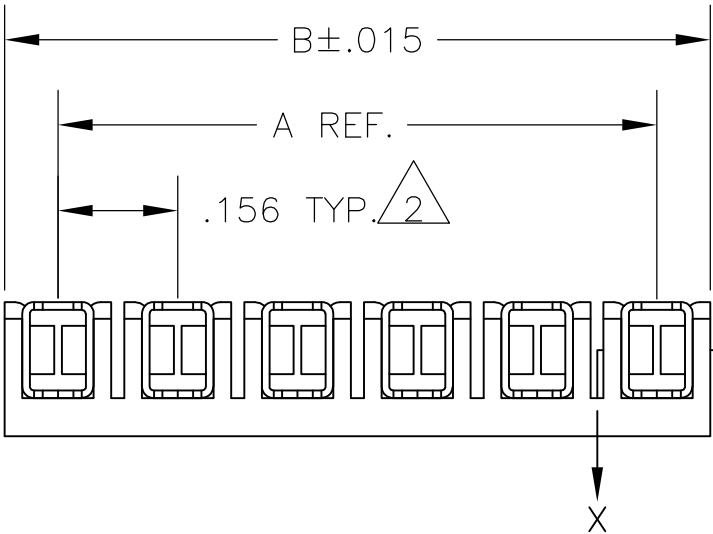


- NOTES:
-  POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE OF BEAMS).
-  TOLERANCE NON-CUMULATIVE.
-  THE MATING END OF THE CONTACT IS IDENTIFIED BY THE LETTER "A" STAMPED ON THE RECEPTACLE BOX.
-  OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

RECOMMENDED BOARD MOUNTING
(RECOMMENDED BOARD THICKNESS: .055-.070)

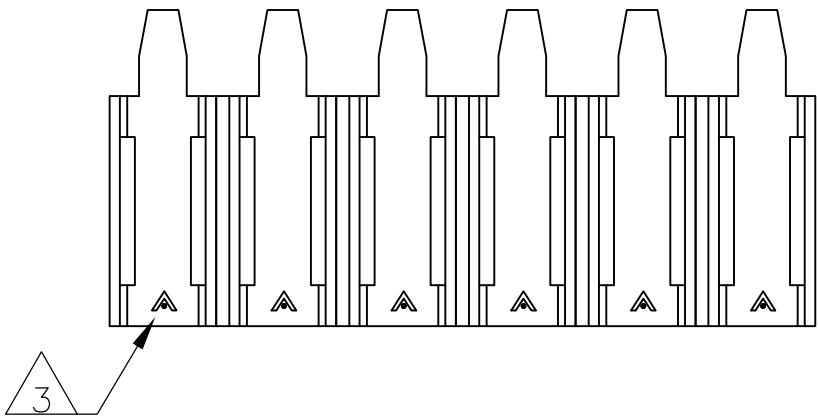

	3.120	2.964	20	2-87982-0
	2.964	2.808	19	1-87982-9
	2.808	2.652	18	1-87982-8
	2.652	2.496	17	1-87982-7
	2.496	2.340	16	1-87982-6
	2.340	2.184	15	1-87982-5
	2.184	2.028	14	1-87982-4
	2.028	1.872	13	1-87982-3
	1.872	1.716	12	1-87982-2
	1.716	1.560	11	1-87982-1
	1.560	1.404	10	1-87982-0
	1.404	1.248	9	87982-9
	1.248	1.092	8	87982-8
	1.092	.936	7	87982-7
 OBSOLETE	.936	.780	6	87982-6
 OBSOLETE	.780	.624	5	87982-5
 OBSOLETE	.624	.468	4	87982-4
 OBSOLETE	.468	.312	3	87982-3
 OBSOLETE	.312	.156	2	87982-2
	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L D RINGLEY 17MAR86	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK P deJONG 18MAR86		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
	0 PLC ± -		APVD P deJONG 18MAR86	
	1 PLC ± -		PRODUCT SPEC	
			108-25,016	
			APPLICATION SPEC	
			114-25,004	
			WEIGHT -	
MATERIAL HOUSING-FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS- PHOS BRONZE		FINISH .000030 GOLD IN THE CONTACT AREA, GOLD FLASH ON THE REMAINDER, ALL OVER .000050 NICKEL		RESTRICTED TO -
CUSTOMER DRAWING			SCALE A2 00779 C=87982	REV K1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[87982-2](#)