
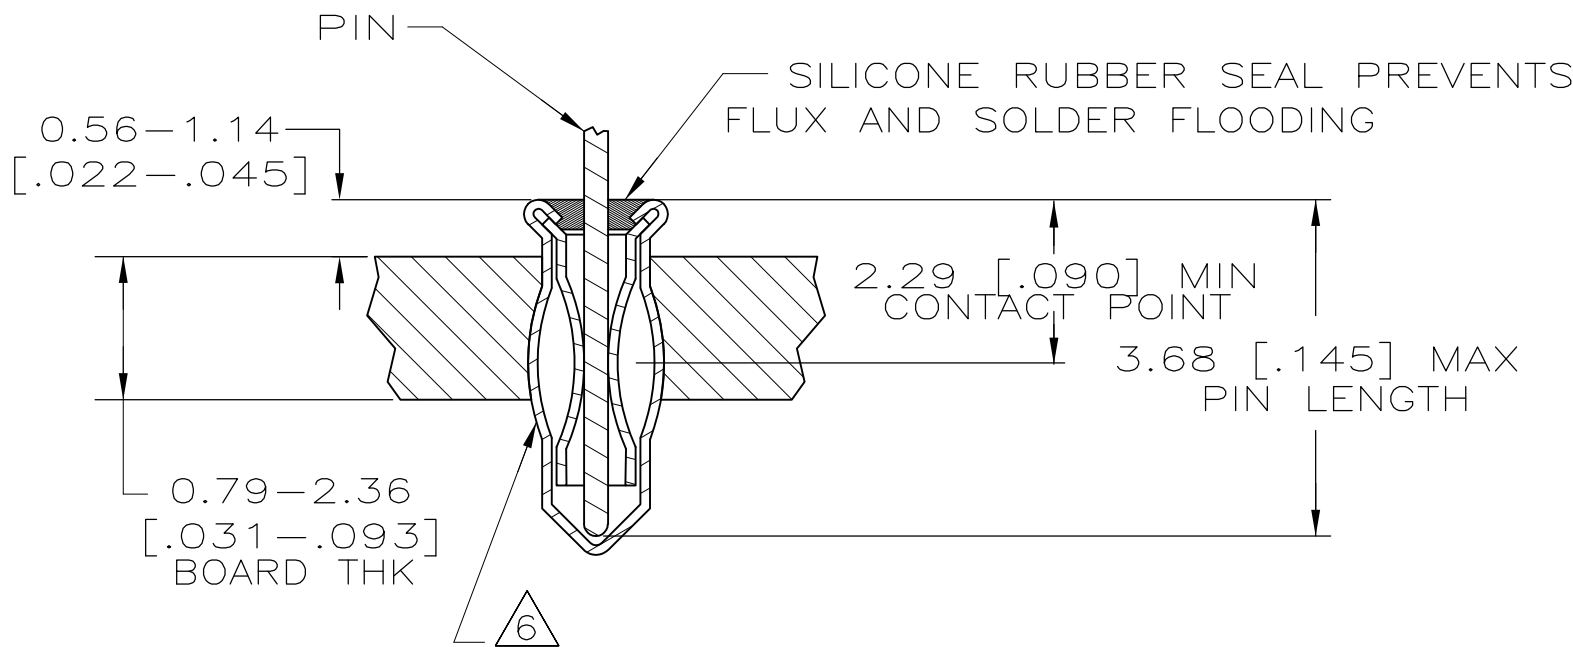
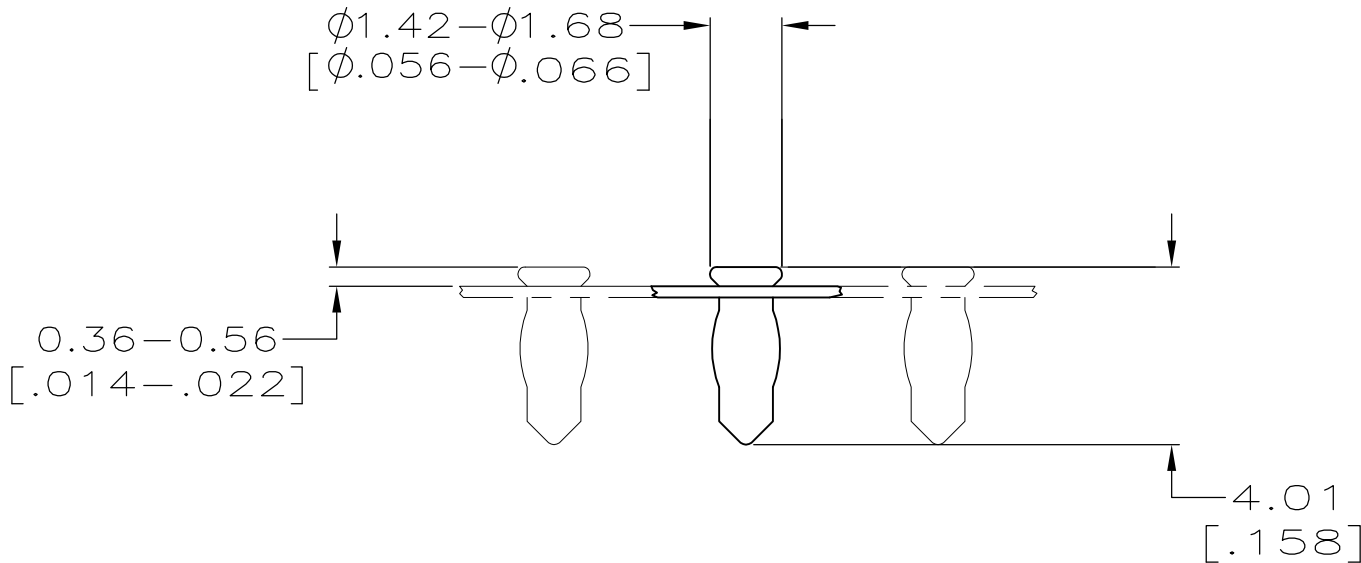


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AG	53		0	RELEASED	26JAN06	JDP	JGH
			01	REV PER ECO-09-024606	03NOV09	KK	AEG

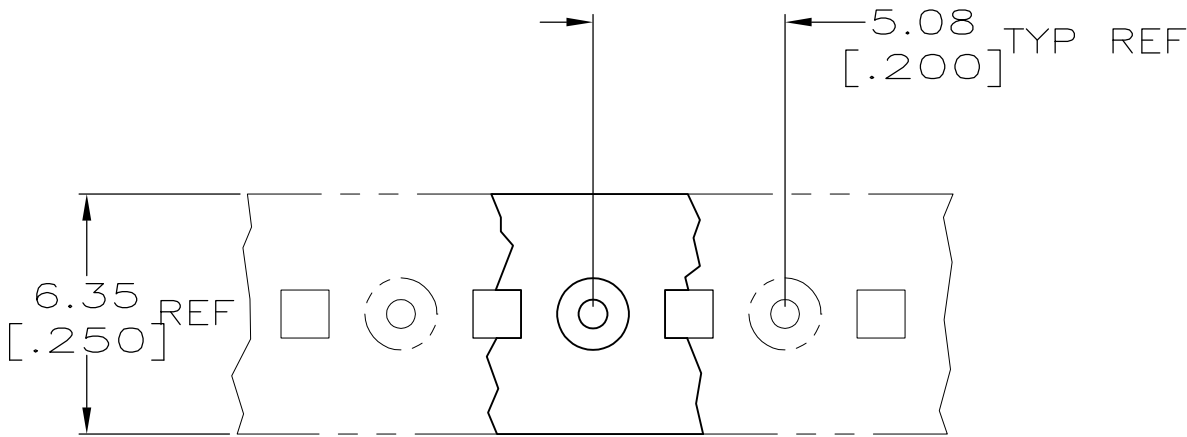

- 1 MATERIAL:
EYELET - COPPER PER ASTM B 152
SPRING - BERYLLIUM COPPER PER ASTM B 194
SEALANT - SILICONE RUBBER
- 2 TIN PLATE PER ASTM B 545, [.000100] MIN THK.
- 3 GOLD PLATE PER ASTM B 488, 0.00076 [.000030] MIN THK ON CONTACT AREA.
- 4 PACKAGED 50,000 PER REEL
- 5 TO INSURE 1/2 OZ MIN RETENTION DO NOT EXCEED 0.10 [.004] DIFFERENCE IN PIN DIA WHEN CHANGING TO A SMALLER DIA PIN
- 6 PRODUCT IS OVALIZED FOR RETENTION IN THE P.C. BOARD. THE RECOMMENDED HOLE DIAMETER IS 1.07 [0.042] MINIMUM, +0.08 [.003] MAX. PRIOR TO SOLDERING.
- 7 PACKAGED 10,000 PER REEL
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8 OBSOLETE	2.29-3.68 [.090-.145]	0.30-0.46 [0.012-0.018]	GOLD 3	TIN 2	7 1-5645947-5
	2.29-3.68 [.090-.145]	0.38-0.53 [0.015-0.021]	GOLD 3	TIN 2	7 1-5645947-2
	2.29-3.68 [.090-.145]	0.38-0.53 [0.015-0.021]	GOLD 3	TIN 2	4 5645947-2
	2.29-3.68 [.090-.145]	0.38-0.53 [0.015-0.021]	TIN 2	TIN 2	4 5645947-1
	LENGTH	DIA 5	SPRING	EYELET	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	26JAN06	Tyco Electronics Corporation AMP Incorporated Harrisburg, PA 17105-3608		
		CHK	26JAN06			
		APVD	26JAN06	NAME		
		PRODUCT SPEC		MINIATURE SPRING SOCKET ASSY		
		APPLICATION SPEC		SERIES 1 SHORT		
		114-26004		WITH SEALANT		
		WEIGHT	-	SIZE	CAGE CODE	DRAWING NO
		CUSTOMER DRAWING		A2	00779	C=5645947
		SCALE	10:1	SHEET	1 OF 1	REV
				01		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5645947-1](#)