



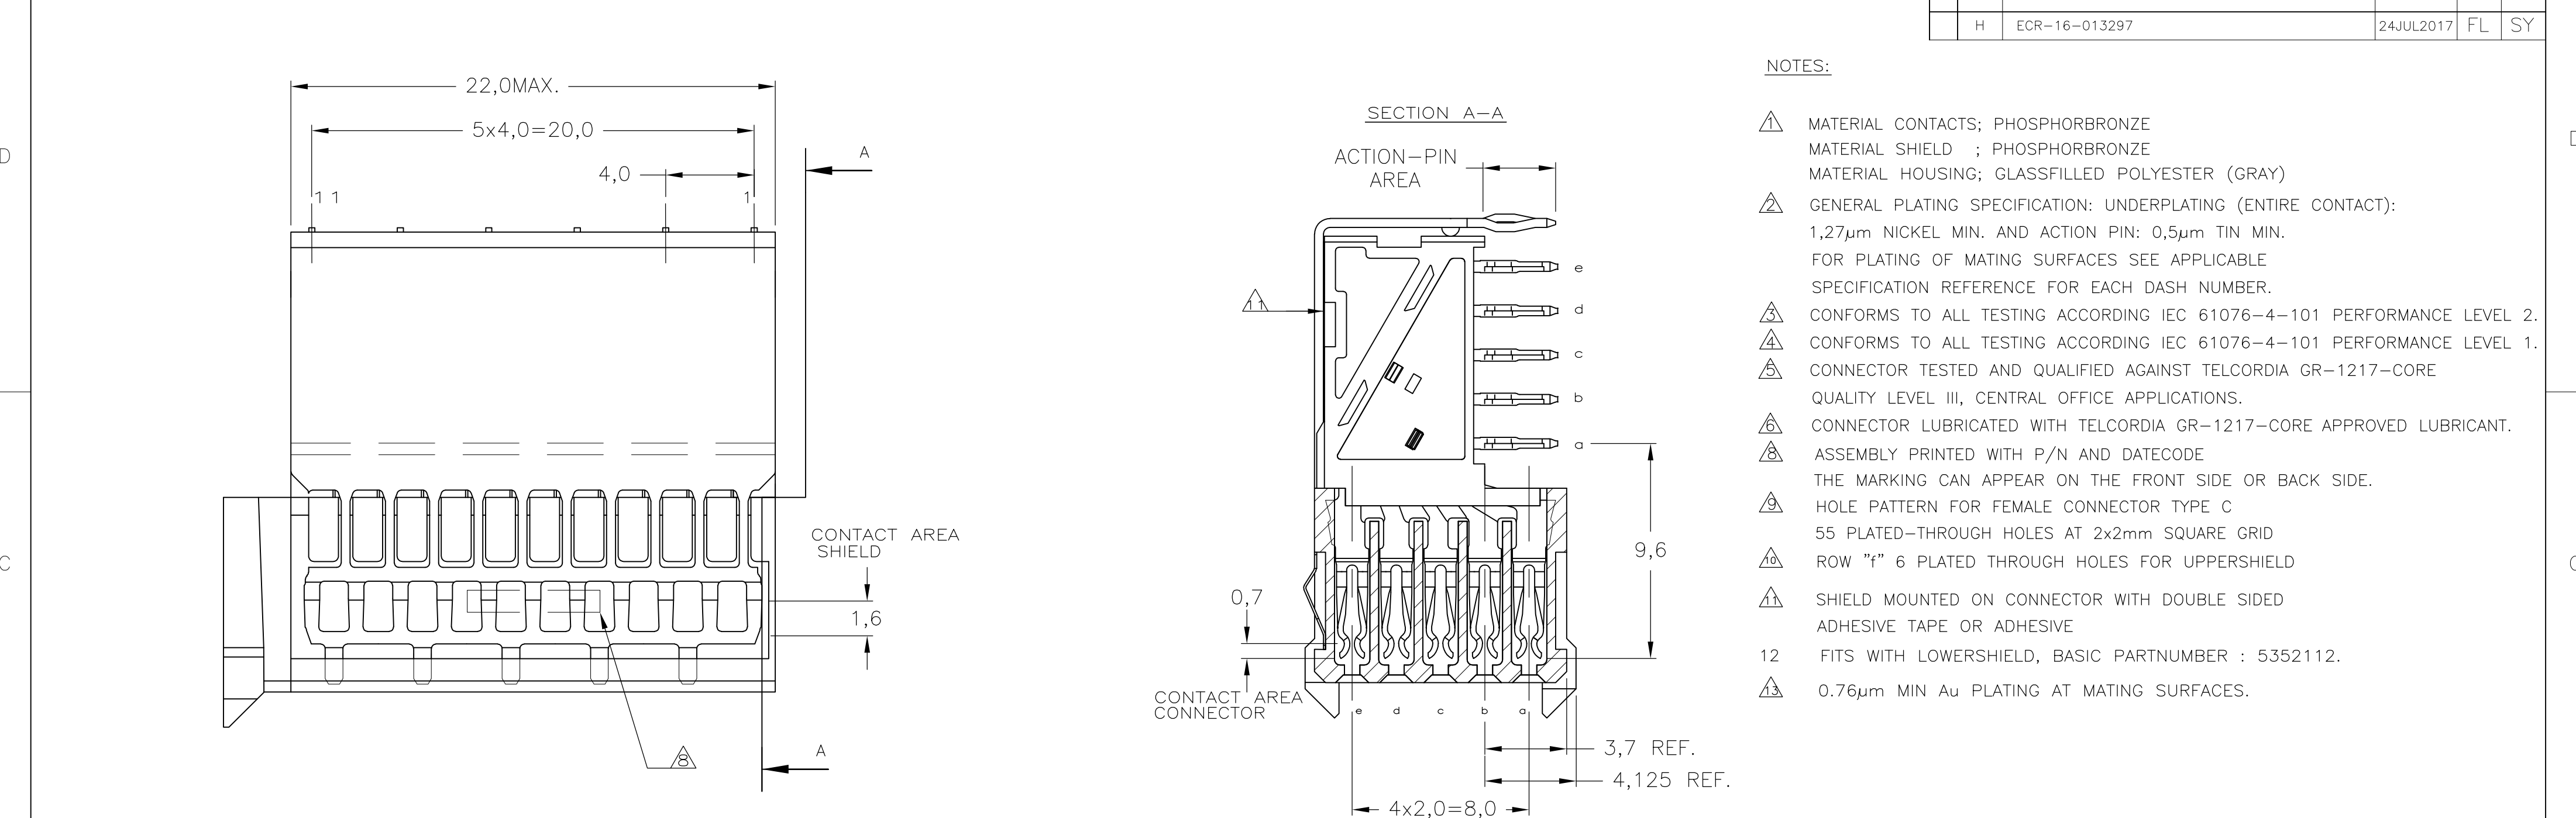

- NOTES:
- △ MATERIAL CONTACTS; PHOSPHORBRONZE
 - △ MATERIAL SHIELD ; PHOSPHORBRONZE
 - △ MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - △ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - △ ASSEMBLY PRINTED WITH P/N AND DATECODE
 - △ THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C
 - △ 55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - △ ROW "f" 6 PLATED THROUGH HOLES FOR UPERSHIELD
 - △ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
 - 12 FITS WITH LOWERSHIELD, BASIC PARTNUMBER : 5352112.
 - △ 0.76μm MIN Au PLATING AT MATING SURFACES.

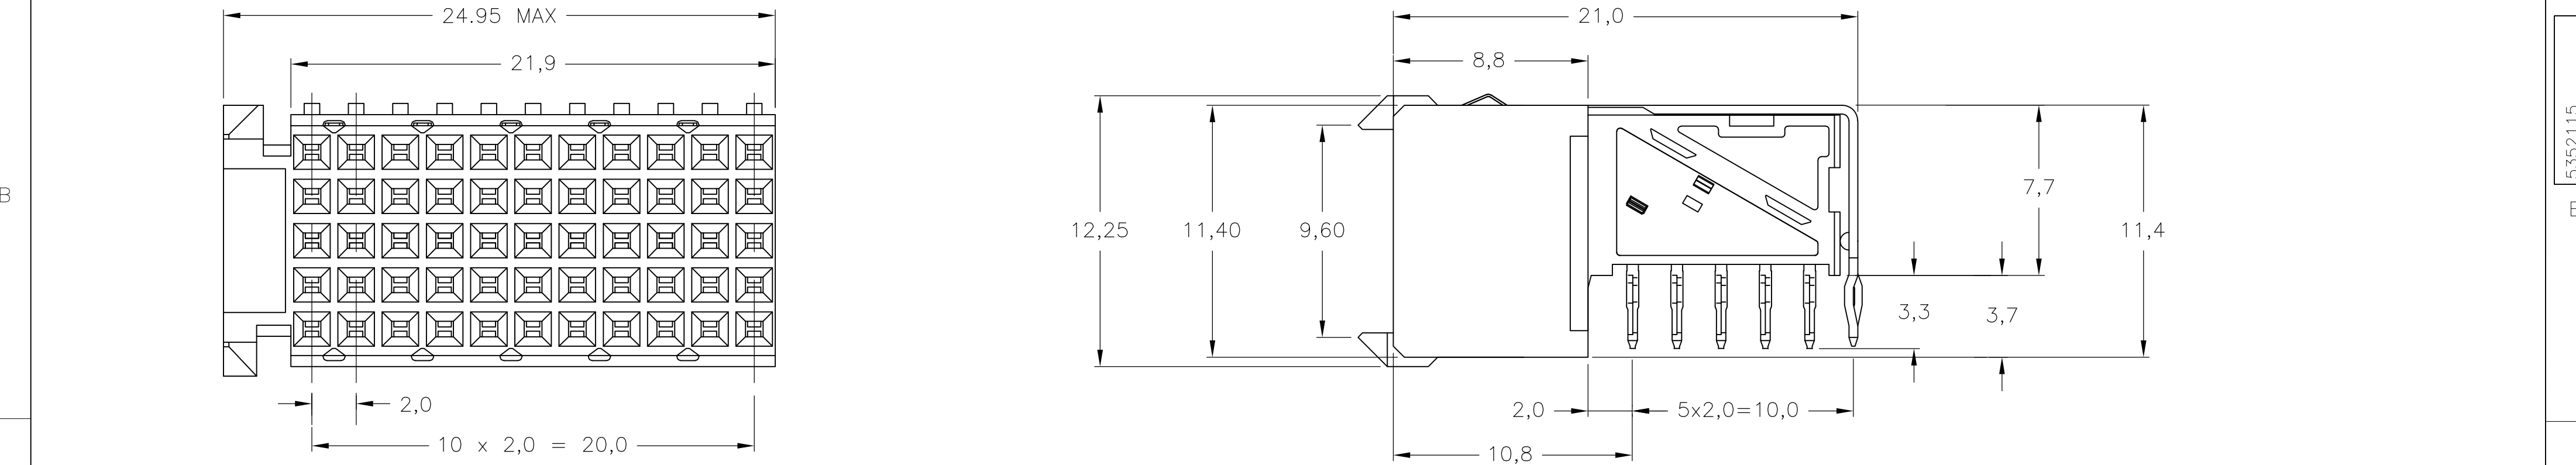

COMPONENT SIDE AS SHOWN

RECOMMENDED PCB-HOLE LAY-OUT

SCALE 2,5:1

5x 4,0 = 20,0

4x 2,0 = 8,0

10x 2,0 = 20,0

1,5

EDGE OF P.C.BOARD

ALL HOLES

2,0

0,05

P.C.B. HOLE DIM. ACTION PIN

FOR DETAILS SEE

APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

0-PLC ±

1-PLC ±

2-PLC ±

3-PLC ±

4-PLC ±

ANGLES ±

FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

±0.2

MATERIAL

-

DWN K.N.KIRAN 19AUG2004

CHK B.MOOIJ 24SEP2004

APVD B.MOOIJ 24SEP2004

PRODUCT SPEC 108-19082

APPLICATION SPEC 114-19029

WEIGHT 0.000000

CUSTOMER DRAWING

△△△

△△△

△△

△△

FINISH

△

△

△

△

MATERIAL

3-5352115-0

5352115-9

5352115-4

5352115-1

PARTNUMBER

TE

TE Connectivity

Z-PACK 2mm HM

TYPE C - 11 COLUMNS

PRE-SHIELDED RECEPTACLE

SIZE A2

CAGE CODE 00779

DRAWING NO C=5352115

RESTRICTED TO -

SCALE 5:1

SHEET 1 of 1

REV H

1471-9 (1/15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-5352115-0](#)