

- NOTES:
1. MATERIALS: HOUSING - GRAY LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0  
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
  2. FINISH: 30µIN MIN SELECTIVE GOLD IN CONTACT AREA, SELECTIVE TIN  
ON PCB TAILS. NICKEL OVERALL.
  3. REFER TO MOLEX PRODUCT SPEC PS-170540-999 FOR PERFORMANCE SPECIFICATIONS  
AND ADDITIONAL PCB INFORMATION.
  4. EACH SIGNAL WAFER CONTAINS 2 COLUMNS OF TERMINALS.
  5. PRODUCT IS PACKAGED PER PK-70873-610.
  6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
  7. REFER TO MOLEX SALES DRAWING SD-170335-0001 FOR THE MATING HEADERS.
  8. REFER TO MOLEX PCB ROUTING GUIDE AS-76060-990 FOR THE ANTIPAD AND ROUTING  
RECOMMENDATIONS.
  9. GROUND PATHS ARE NOT DISCRETE CIRCUITS WITHIN CONNECTOR DUE TO PRESENCE  
OF PLUS CLIP.
  10. PART NUMBER 170340-1020 SHOWN ON DRAWING. KEYING FEATURES WILL CHANGE  
WITH COLUMN SIZE.
  11. MINIMUM BOARD THICKNESS IS 1.00 mm FOR COMPLIANT PIN FUNCTIONALITY.
  12. MARKING: LOCATED APPROXIMATELY AS SHOWN. PART NUMBER AND DATE CODE.

DAUGHTERCARD HOLE PATTERN  
(CONNECTOR SIDE)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX															
mm		NTS		<p>IMPACT 4-PAIR 85-OHM DAUGHTERCARD SIGNAL UNGUIDED SALES DRAWING</p> <p>PRODUCT CUSTOMER DRAWING</p> <table border="1"> <tr> <td>DOCUMENT NUMBER</td> <td>DOC TYPE</td> <td>DOC PART</td> <td>REVISION</td> </tr> <tr> <td>SD-170340-0001</td> <td>PSD</td> <td>001</td> <td>B4</td> </tr> </table>								DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION	SD-170340-0001	PSD	001	B4
DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION																
SD-170340-0001	PSD	001	B4																
GENERAL TOLERANCES (UNLESS SPECIFIED)																			
ANGULAR TOL ± 0.5°																			
4 PLACES ±																			
3 PLACES ±																			
2 PLACES ± 0.13																			
1 PLACE ± 0.25																			
0 PLACES ±																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER									
		C-SIZE		170340		SEE CHART		GENERAL MARKET		SHEET NUMBER									
										1 OF 2									

MATERIAL NUMBER	# OF COLUMNS	# OF DIFF PAIR	DIM "A" MAX	DIM "B"	PTH $\phi$
170340-1006	6	24	11.40	9.50	0.46 $\pm 0.05$
170340-1008	8	32	15.20	13.30	
170340-1010	10	40	19.00	17.10	
170340-1012	12	48	22.80	20.90	
170340-1014	14	56	26.60	24.70	
170340-1016	16	64	30.40	28.50	
170340-1036	6	24	11.40	9.50	0.39 $\pm 0.05$
170340-1038	8	32	15.20	13.30	
170340-1020	10	40	19.00	17.10	
170340-1022	12	48	22.80	20.90	
170340-1024	14	56	26.60	24.70	
170340-1026	16	64	30.40	28.50	






170340-\*0\*\*

MODULE & TAIL PLATING TYPE  
1 = OPEN LEAD-FREE

# OF COLUMNS  
06 = 6 COL 0.46 PTH  
08 = 8 COL 0.46 PTH  
10 = 10 COL 0.46 PTH  
12 = 12 COL 0.46 PTH  
14 = 14 COL 0.46 PTH  
16 = 16 COL 0.46 PTH  
20 = 10 COL 0.39 PTH  
22 = 12 COL 0.39 PTH  
24 = 14 COL 0.39 PTH  
26 = 16 COL 0.39 PTH  
36 = 6 COL 0.39 PTH  
38 = 8 COL 0.39 PTH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX				<b>molex</b>	
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 612222				IMPACT 4-PAIR 85-OHM DAUGHTERCARD SIGNAL UNGUIDED SALES DRAWING	
ANGULAR TOL $\pm 0.5^\circ$				DRWN: AAPPARAOTHAK 2018/11/08					
4 PLACES $\pm$				CHK'D: TMARRI 2019/02/19					
3 PLACES $\pm$				APPR: BOKOK 2019/02/20				PRODUCT CUSTOMER DRAWING	
2 PLACES $\pm 0.13$				INITIAL REVISION:				DOCUMENT NUMBER	
1 PLACE $\pm 0.25$				DRWN: TELO 2010/05/12				SD-170340-0001	
0 PLACES $\pm$				APPR: TELO 2011/01/25				DOC TYPE   DOC PART   REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SHEET NUMBER	
						C-SIZE		2 OF 2	
				SERIES		MATERIAL NUMBER		CUSTOMER	
				170340		SEE CHART		GENERAL MARKET	

DOCUMENT STATUS	P1	RELEASE DATE	2019/02/20	10:38:00
-----------------	----	--------------	------------	----------

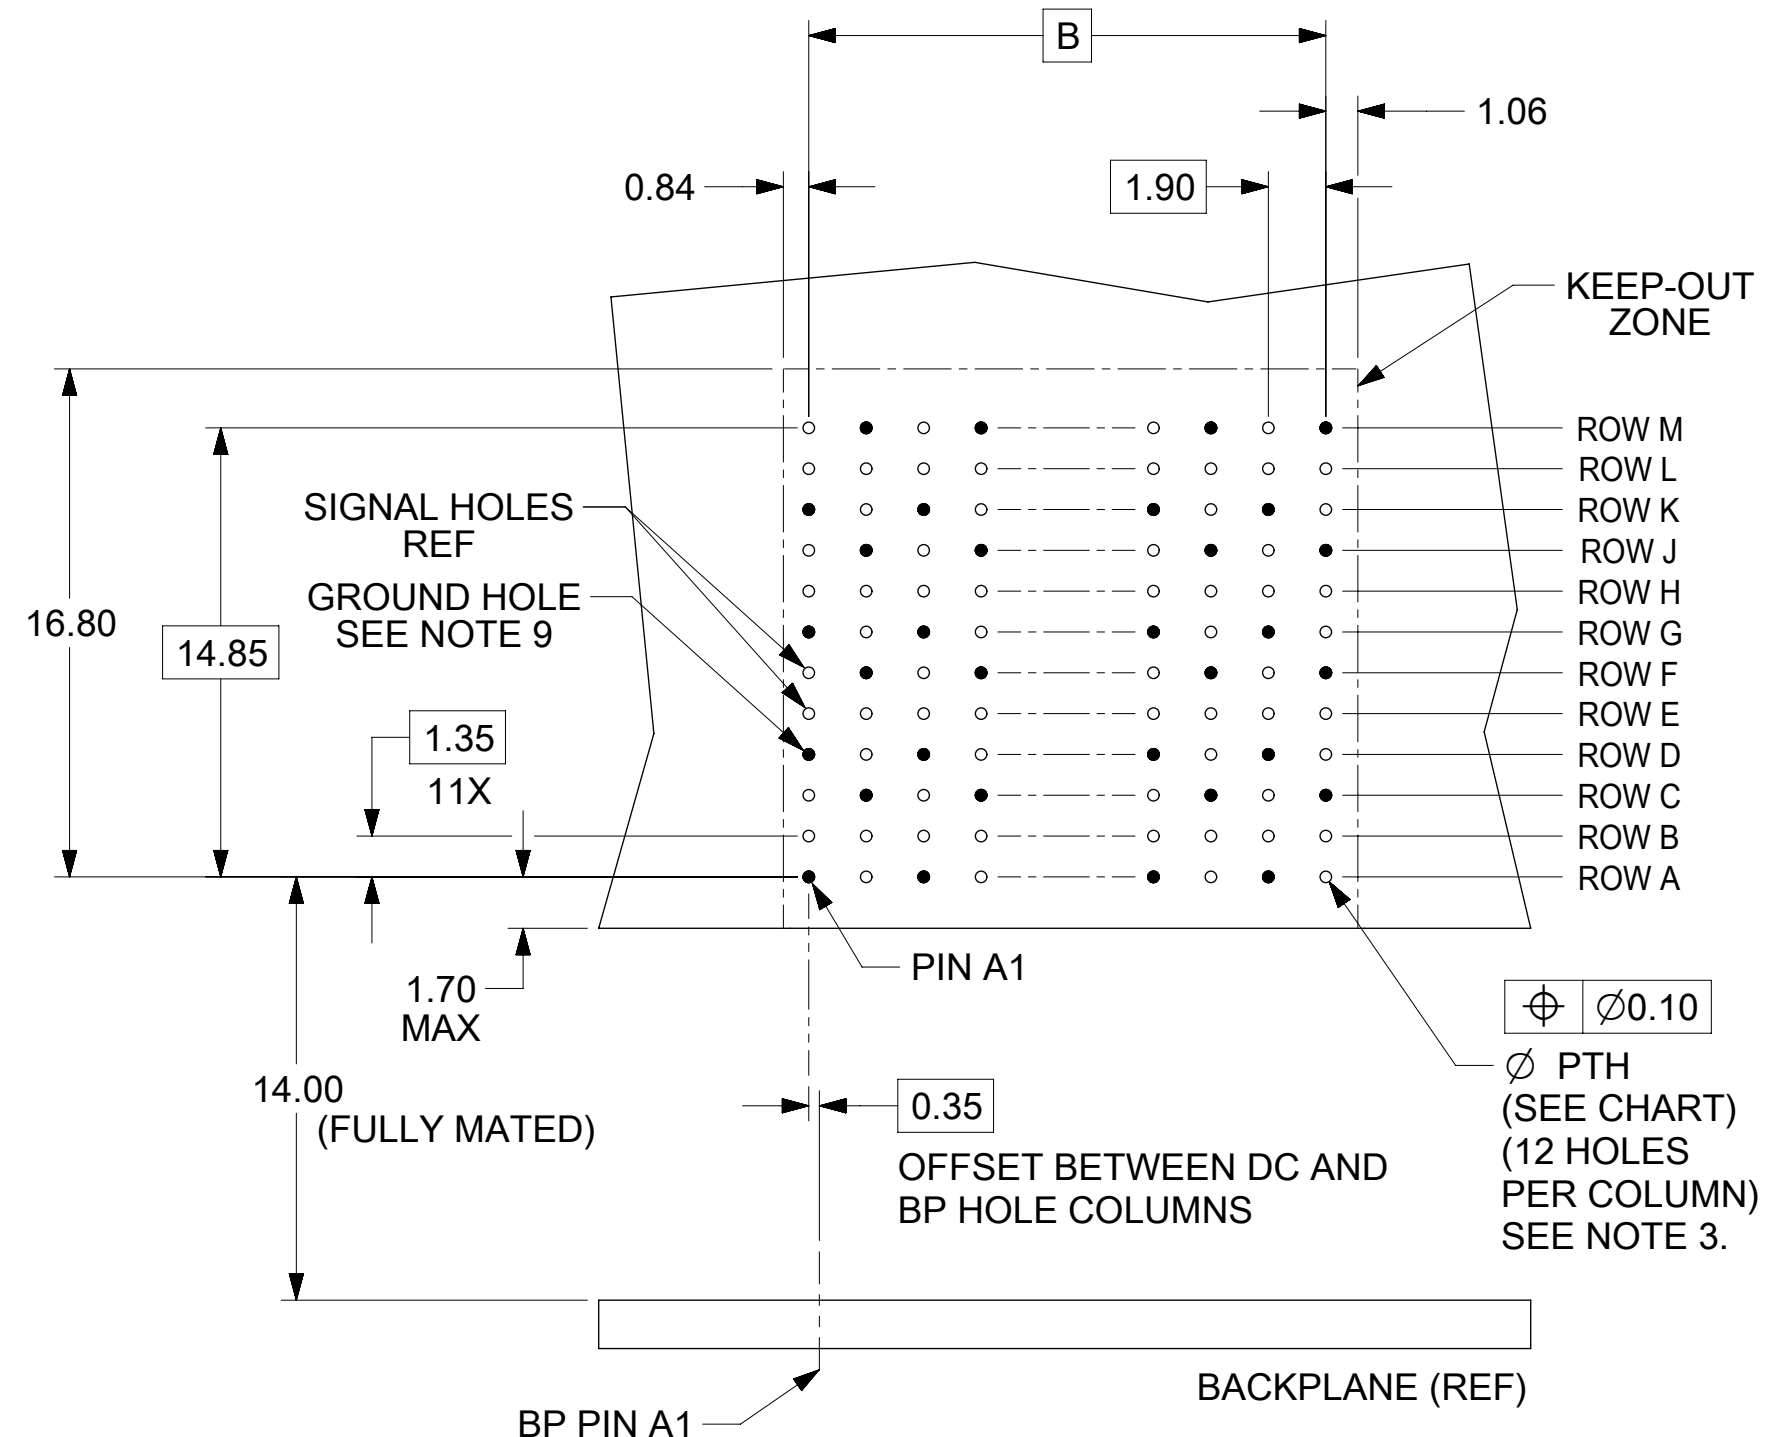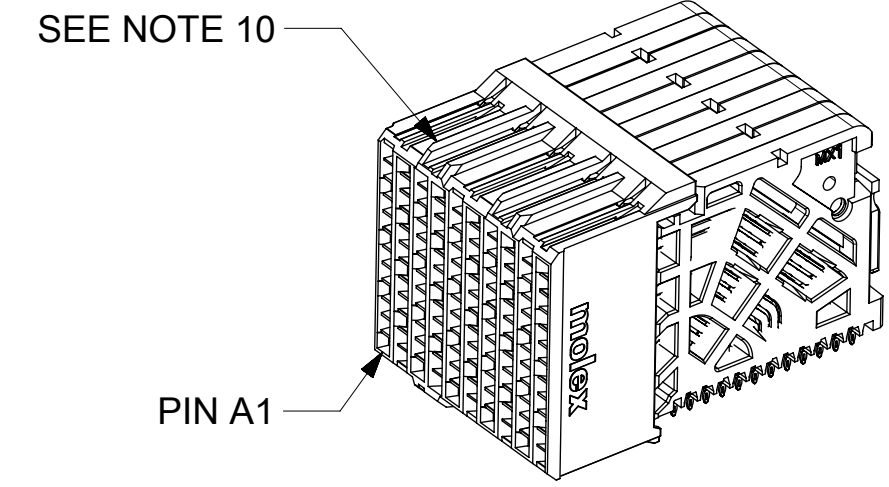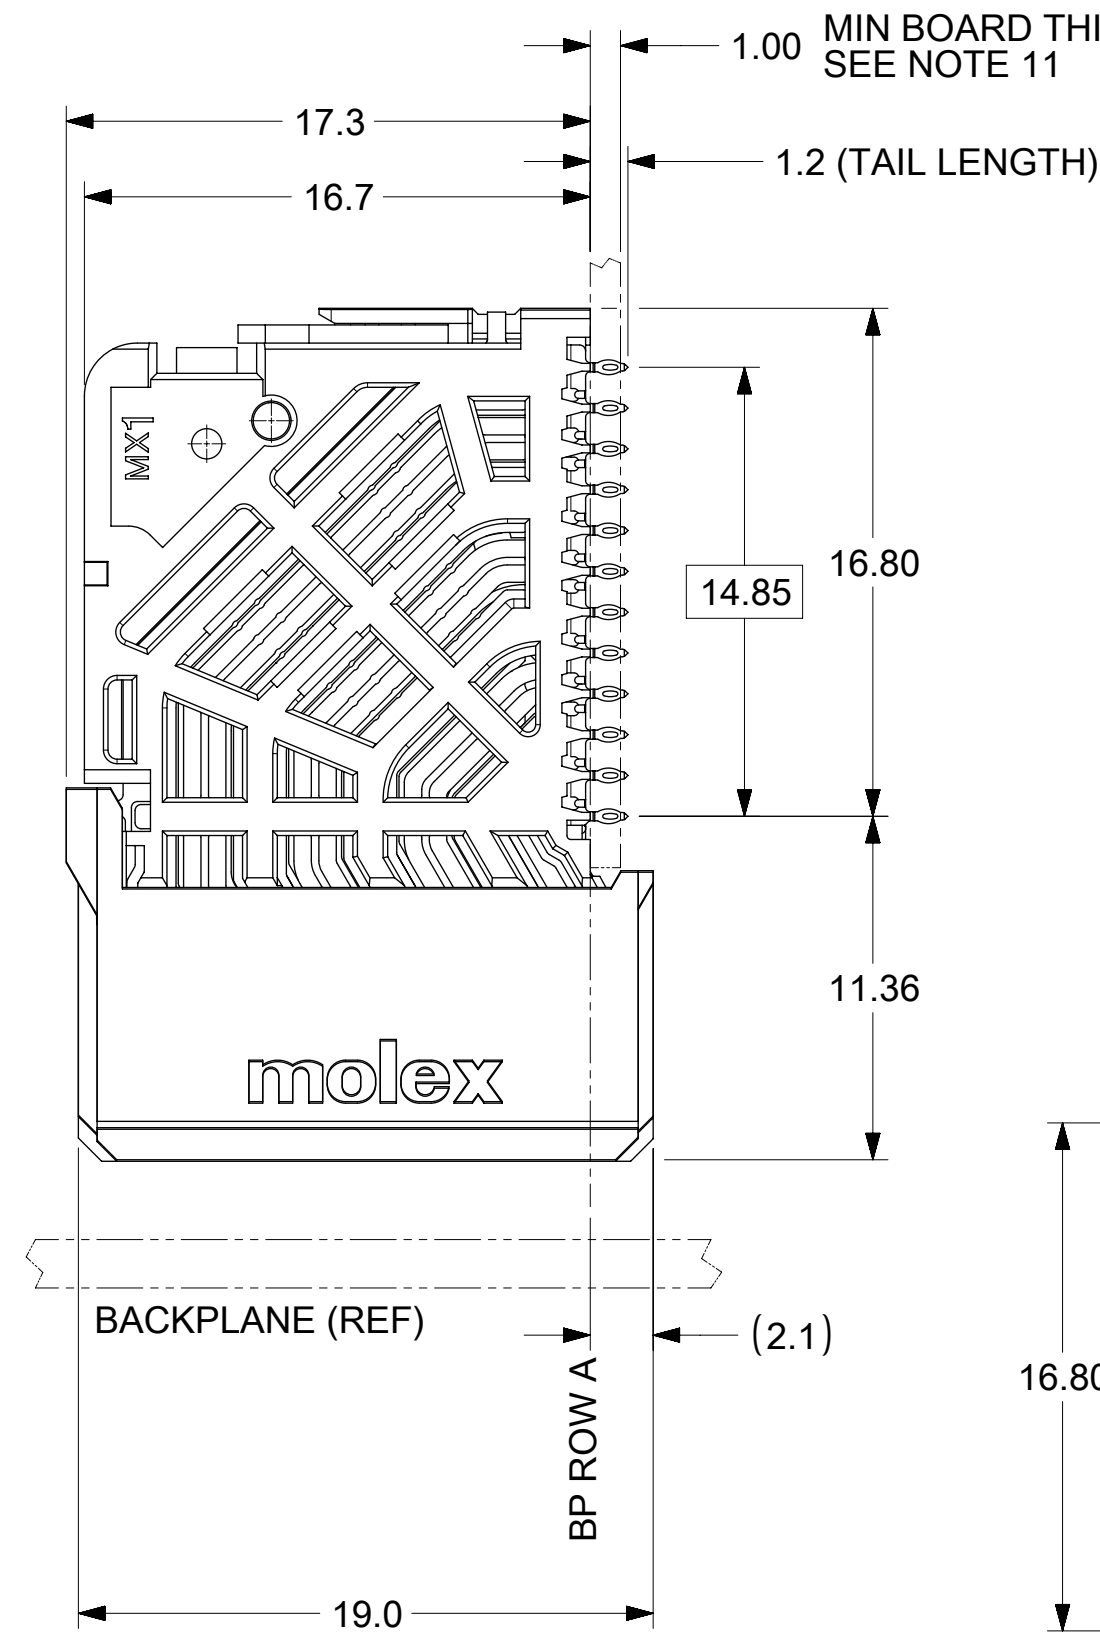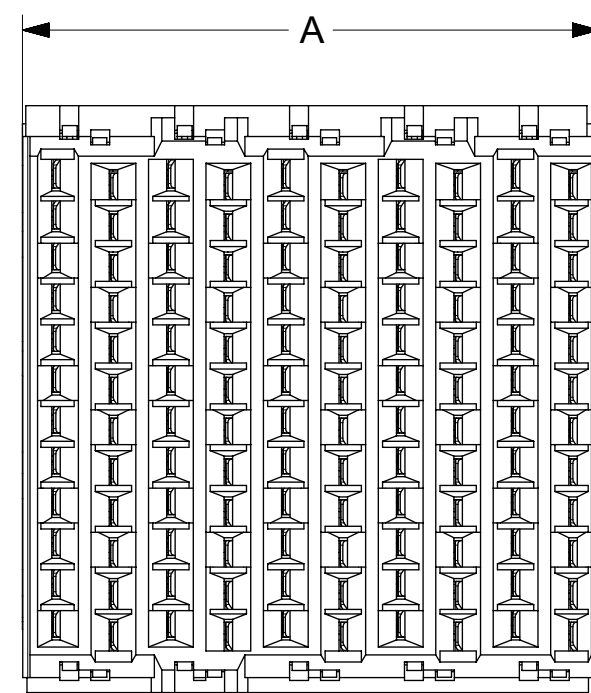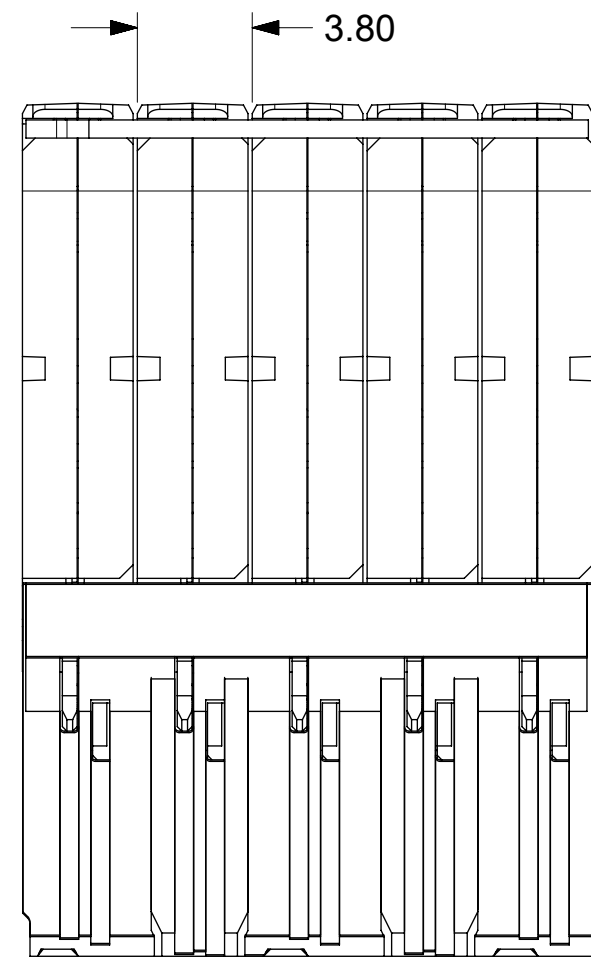

- NOTES:
1. MATERIALS: HOUSING - GRAY LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0 TERMINALS - HIGH PERFORMANCE COPPER ALLOY
  2. FINISH: 30µIN MIN SELECTIVE GOLD IN CONTACT AREA, SELECTIVE TIN ON PCB TAILS. NICKEL OVERALL.
  3. REFER TO MOLEX PRODUCT SPEC PS-170540-999 FOR PERFORMANCE SPECIFICATIONS AND ADDITIONAL PCB INFORMATION.
  4. EACH SIGNAL WAFER CONTAINS 2 COLUMNS OF TERMINALS.
  5. PRODUCT IS PACKAGED PER PK-70873-610.
  6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
  7. REFER TO MOLEX SALES DRAWING SD-170335-0001 FOR THE MATING HEADERS.
  8. REFER TO MOLEX PCB ROUTING GUIDE AS-76060-990 FOR THE ANTIPAD AND ROUTING RECOMMENDATIONS.
  9. GROUND PATHS ARE NOT DISCRETE CIRCUITS WITHIN CONNECTOR DUE TO PRESENCE OF PLUS CLIP.
  10. PART NUMBER 170340-1020 SHOWN ON DRAWING. KEYING FEATURES WILL CHANGE WITH COLUMN SIZE.
  11. MINIMUM BOARD THICKNESS IS 1.00 mm FOR COMPLIANT PIN FUNCTIONALITY.

DAUGHTERCARD HOLE PATTERN (CONNECTOR SIDE)



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX					
mm		NTS		<p>IMPACT 4-PAIR 85-OHM DAUGHTERCARD SIGNAL UNGUIDED SALES DRAWING</p> <p>PRODUCT CUSTOMER DRAWING</p>					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL ± 0.5°									
4 PLACES ±									
3 PLACES ±									
2 PLACES ± 0.13				EC NO: 612533		DRWN: NMUTHARAYAPP 2018/11/13		CHK'D: TMARRI 2019/02/25	
1 PLACE ± 0.25				APPR: BOKOK 2019/03/01		INITIAL REVISION:		DRWN: BJMILLER 2013/04/26	
0 PLACES ±				APPR: BOKOK 2019/03/01		SERIES		MATERIAL NUMBER	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		CUSTOMER	
				C-SIZE		173137		GENERAL MARKET	
DOCUMENT STATUS		P1		RELEASE DATE		2019/03/01 07:25:54		SHEET NUMBER	
								1 OF 2	

MATERIAL NUMBER	# OF COLUMNS	# OF DIFF PAIR	DIM "A" MAX	DIM "B"	PTH $\phi$
170340-1006	6	24	11.40	9.50	0.46 $\pm 0.05$
170340-1008	8	32	15.20	13.30	
170340-1010	10	40	19.00	17.10	
170340-1012	12	48	22.80	20.90	
170340-1014	14	56	26.60	24.70	
170340-1016	16	64	30.40	28.50	
170340-1036	6	24	11.40	9.50	0.39 $\pm 0.05$
170340-1038	8	32	15.20	13.30	
170340-1020	10	40	19.00	17.10	
170340-1022	12	48	22.80	20.90	
170340-1024	14	56	26.60	24.70	
170340-1026	16	64	30.40	28.50	

170340-\*0\*\*

MODULE & TAIL PLATING TYPE  
1 = OPEN LEAD-FREE

# OF COLUMNS  
06 = 6 COL 0.46 PTH  
08 = 8 COL 0.46 PTH  
10 = 10 COL 0.46 PTH  
12 = 12 COL 0.46 PTH  
14 = 14 COL 0.46 PTH  
16 = 16 COL 0.46 PTH  
20 = 10 COL 0.39 PTH  
22 = 12 COL 0.39 PTH  
24 = 14 COL 0.39 PTH  
26 = 16 COL 0.39 PTH  
36 = 6 COL 0.39 PTH  
38 = 8 COL 0.39 PTH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATED TO NX					
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 612533				<b>IMPACT 4-PAIR 85-OHM DAUGHTERCARD SIGNAL UNGUIDED SALES DRAWING</b>	
ANGULAR TOL $\pm 0.5^\circ$				DRWN: NMUTHARAYAPP 2018/11/13					
4 PLACES $\pm$				CHK'D: TMARRI 2019/02/25					
3 PLACES $\pm$				APPR: BOKOK 2019/03/01				<b>PRODUCT CUSTOMER DRAWING</b>	
2 PLACES $\pm 0.13$				INITIAL REVISION:					
1 PLACE $\pm 0.25$				DRWN: BJMILLER 2013/04/26				DOCUMENT NUMBER	
0 PLACES $\pm$				APPR: BOKOK 2019/03/01				SD-173137-0001	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER	
				C-SIZE		173137		SEE CHART	
CUSTOMER		GENERAL MARKET		SHEET NUMBER		2 OF 2			

DOCUMENT STATUS	P1	RELEASE DATE	2019/03/01 07:25:54
-----------------	----	--------------	---------------------