

LOC	DIST	REVISIONS					
		#	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	A1		REVISED PER ECO-09-024606	31OCT09	KK	AEG
		B		REVISED PER ECO-15-014641	22OCT15	DS	FY

- △




HOUSING MATERIAL: LIQUID CRYSTAL POLYMER. COLOR: NATURAL
- △

CONTACT MATERIAL: PHOSPHOR-BRONZE
- △



CONTACT FINISH:(B)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.0006 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- △

PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
- △


OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

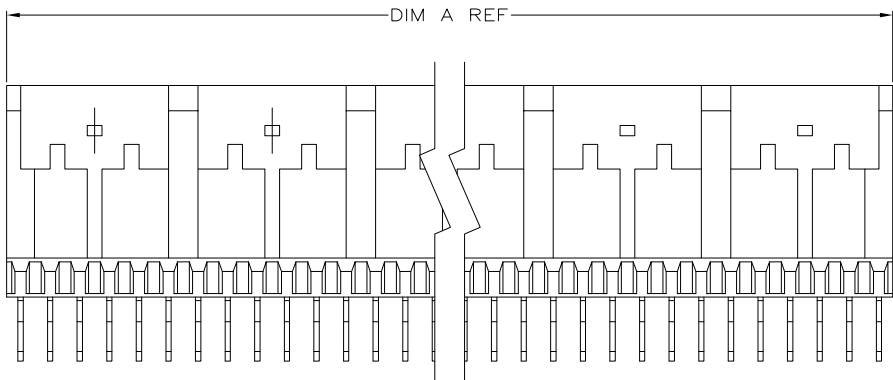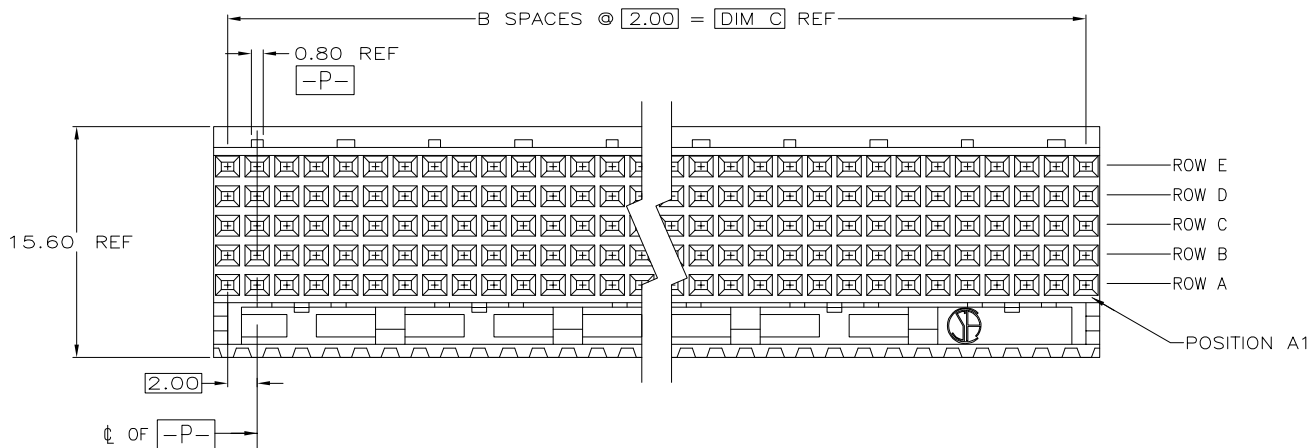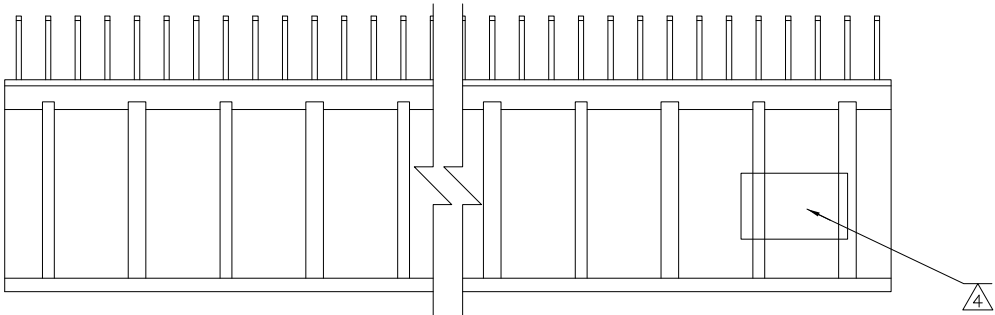

Ø0.725±0.075
PLATED THROUGH HOLE
⊕⌀0.15Ⓜ

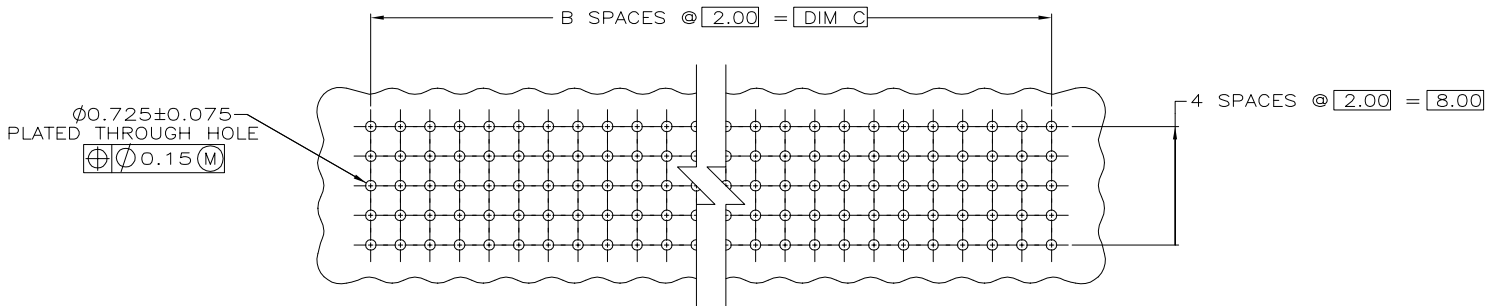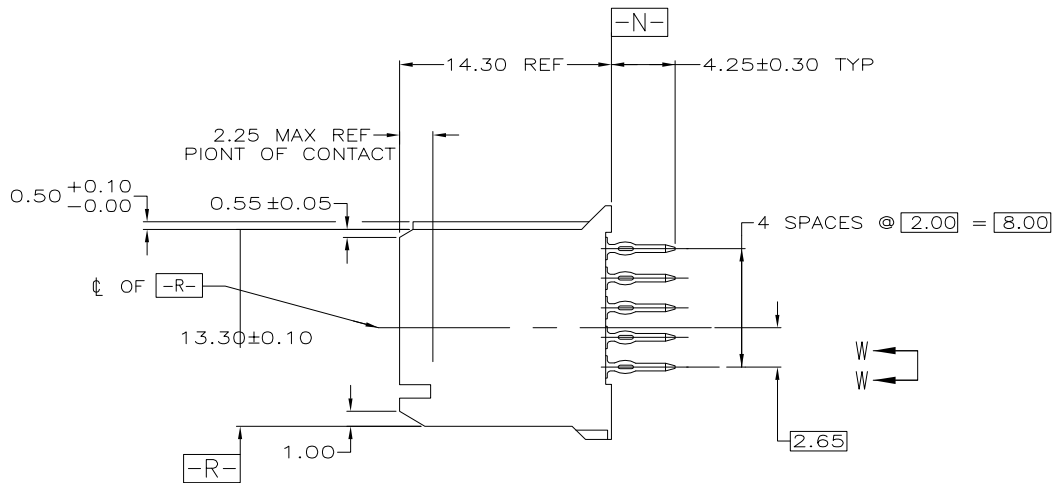

RECOMMENDED CIRCUIT PATTERN
(COMPONENT SIDE)

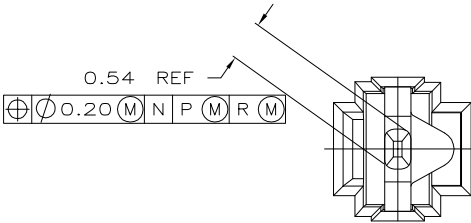

VIEW W-W
SCALE 20:1

△	OBSOLETE	94.00	47	95.88	240	-5223652-8
	OBSOLETE	82.00	41	83.88	210	-5223652-7
△	OBSOLETE	70.00	35	71.88	180	-5223652-6
	OBSOLETE	58.00	29	59.88	150	-5223652-5
		46.00	23	47.88	120	5223652-4
△	OBSOLETE	34.00	17	35.88	90	-5223652-3
	OBSOLETE	22.00	11	23.88	60	5223652-2
		10.00	5	11.88	30	5223652-1
		DIM C	B	DIM A	NUMBER OF SIGNAL POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MCMMASTER	15DEC04	TE Connectivity		
		CHK R.WERTZ	15DEC04			
		APVD R.WERTZ	15DEC04	NAME ASSEMBLY, RECEPTACLE, SIGNAL, VERTICAL, 5 ROW, Z-PACK 2mm FB, WITH PRESS-FIT LEADS		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
		0 PLC ± -		APPLICATION SPEC		
		1 PLC ± -		WEIGHT		
		2 PLC ± 0.13		SIZE		
		3 PLC ± -		CAGE CODE		
		4 PLC ± -		DRAWING NO		
		ANGLES ± -		RESTRICTED TO		
MATERIAL		FINISH		SCALE		
1		2		4:1		
		3		SHEET		
				1 OF 1		
				REV		
				B		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5223652-4](#)