

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0787261002

Status:


Active

Overview:

DDR4 DIMM Sockets

Description:

DDR4 DIMM Socket, Vertical Through-Hole, 0.76µm Gold Plating, 288 Circuits, PCB Thickness 1.57mm, Tail Length 2.67mm, Black Housing, Black Latch

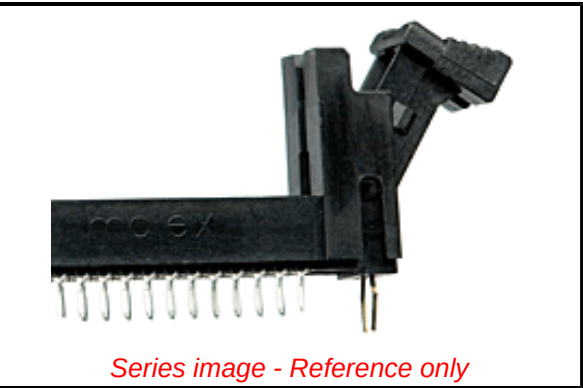

Documents:

[Drawing \(PDF\)](#)

[Product Specification PS-78726-001-001 \(PDF\)](#)

[Application Specification AS-78726-002-001 \(PDF\)](#)

[Packaging Specification PK-78726-001-000 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Memory Module Sockets
Series	78726
Component Type	Socket
Electrical Model	Yes
JEDEC Outline	MO-309
Overview	DDR4 DIMM Sockets
Product Name	DDR4 DIMM
UPC	887191398839
Physical	
Circuits (Loaded)	288
Circuits (maximum)	288
Durability (mating cycles max)	25
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Housing Color	Black
Keying to Mating Part	Yes
Latch Color	Black
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Tin over Nickel
Material - Resin	Nylon
Net Weight	6.626/g
PC Tail Length	2.67mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	0.85mm
Pitch - Termination Interface	0.85mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	0.75A
Voltage - Maximum	29V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	SMC&WAVE

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per

-ED/01/2018 (15

January 2018)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

78726 Series

Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-78726-002-001
Electrical Model Document	787260005-000, 787260021REVA-000, 787260022REVA-000, EE-78726-002, EE-78726-004, REE-78726-0006, REE-78726-0007, REE-78726-0008, REE-78726-0009, REE-78726-012, REE-78726-013, REE-78726-014, REE-78726-015, REE-78726-016, REE-78726-020
Packaging Specification	PK-78726-001-000
Product Specification	PS-78726-001-001
S-Parameter Model	SP-78726-002, SP-78726-004
Sales Drawing	SD-78726-002-000

This document was generated on 02/28/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[78726-1002](#)