

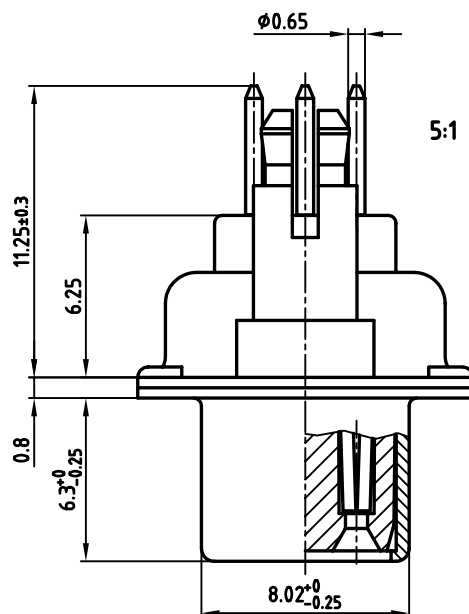
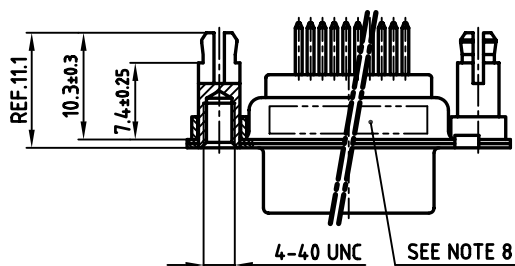


used for: D-SUB HD

No. of Pos.	A -0.76	B -0.25	C	Part No.
15	31.19	16.46	25.00 ^{+0.12} _{-0.13}	164A17359X
26	39.52	24.79	33.30 ^{+0.15} _{-0.1}	164A17369X
44	53.42	38.50	47.04 ^{+0.13} _{-0.1}	164A17379X
62	69.70	54.96	63.50 ^{+0.13} _{-0.1}	164A17389X

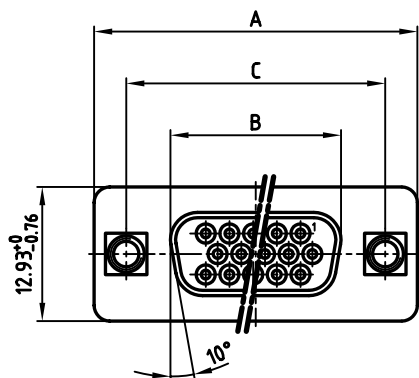

NOTES:

- METALSHELLS: STEEL; min. 315pin TIN over 40-80pin NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8pin HARD GOLD OVER min. 50pin NICKEL
- THREADED SPACER CLIP: COPPER ALLOY; min. 200pin TIN over 80pin NICKEL
PCB-HOLE: $\varnothing 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- COLLAR: COPPER ALLOY; min. 200pin TIN over 80pin NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		dim. in mm
2006	date	name
drawn	03.08.	Lehmenkühler
appd.	03.08.	Kühle
norm		
d-old		

CONEC

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB HD FEMALE 15-62pos. SOLDER PIN STRAIGHT with threaded spacer clip	
dwg no:	AutoCAD 2006
16K2A676	
part no:	SEE TABLE

DIN-A
3
sh:1/2

6

5

4


3

2


1

used for: D-SUB HD


15 pos.

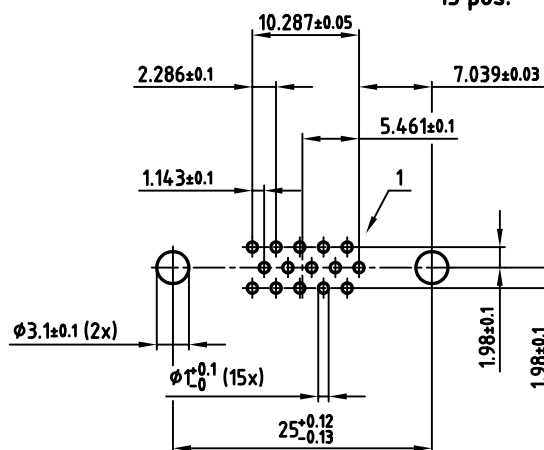


26 pos.

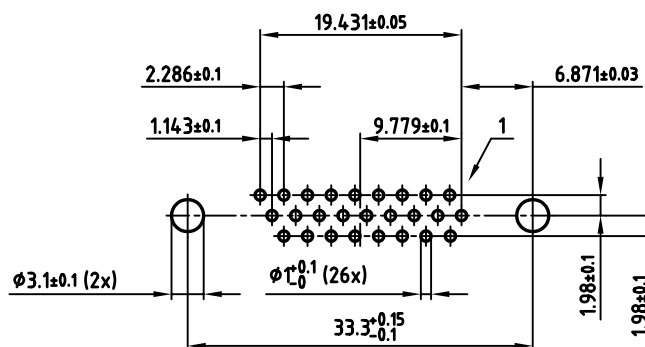

44 pos.

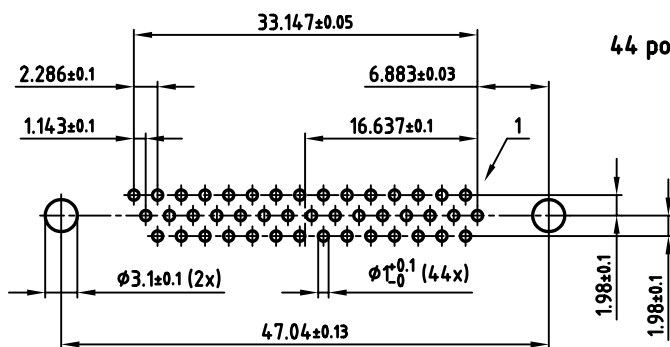

62 pos.

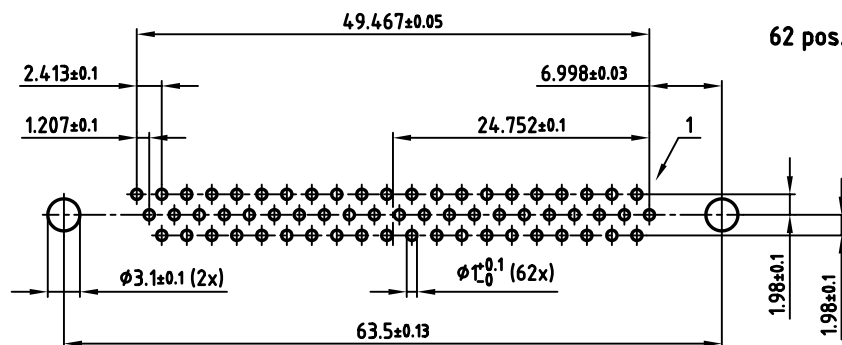

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2006	date
drawn	03.08.
appd.	03.08.
norm	DIN 41652
d-old	

scale:	2:1
material:	SEE SHEET 1
title:	
P.C.B. HOLE DRILLINGS	
D-SUB HD FEMALE 15-62pos. SOLDER PIN	
with threaded spacer clip	
dwg no:	AutoCAD 2006
16K2A676	
part no:	SEE SHEET 1

6

5

4

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

[164A17359X](#) [164A17369X](#) [164A17379X](#)