Ground cleared under antenna, clearance area 7.50 x 5.50 mm. Pulse Part Number: W3108



#### Features

- Low profile (5.5 mm)
- Compact size W x L x H (5.0 x 2.5 x 5.5 mm)
- Low weight (140 mg)
- Lead Free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product

#### **Applications**

- IEEE 802.11b/g
- Bluetooth
- WiFi
- 2.4 GHz WLAN
- 2.4 GHz ISM Band Systems
- ZigBee IEEE 802.15.4

Engineering samples available

#### Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

### 2.4 GHz WiFi

Typical performance (testboard size 100 x 40 mm, PWB ground clearance area 7.5 x 5.5 mm) Values below are measured inside typical mobile phone chassis including all mechanics

Frequency Range	Max Gain	Efficiency	Return loss	Impedance	Operating
[MHz]	[dBi]	[%] / [dB]	min. [dB]	[Ω]	Temperature [°C]
2400 – 2483.5	1.5	50 / -3	-8	50	-40 to +85

Pulse Finland Oy Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas




© 2007. All Rights Reserved


Ground cleared under antenna, clearance area 7.50 x 5.50 mm. Pulse Part Number: W3108

### Typical Electrical Characteristics (T=25 °C)

Measured on basic chassis including PWB, display, battery and plastic covers. Chassis size abt. 17 x 40 x 100 mm. Typical Return Loss S11/ impedance

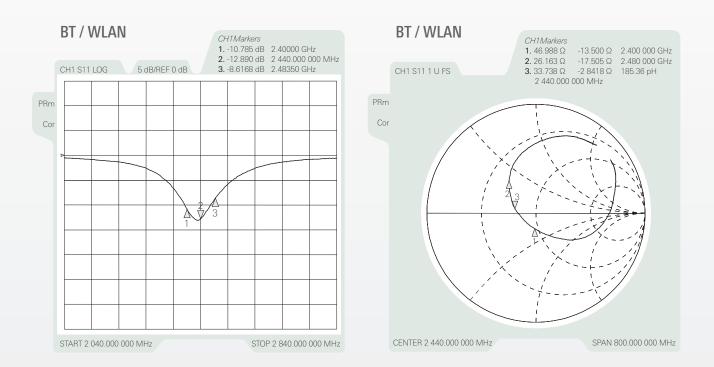

Free space efficiency and maximum gain, PWB ground clearance area 6.00 x 11.00 mm



Wlan 2,4 GHz GC Helix




Pulse Finland Oy Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas





© 2007. All Rights Reserved


Ground cleared under antenna, clearance area 7.50 x 5.50 mm. Pulse Part Number: W3108

### Typical Free space Radiation Patterns












Pulse Finland Oy Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas

#### © 2007. All Rights Reserved.

Ground cleared under antenna, clearance area 7.50 x 5.50 mm. Pulse Part Number: W3108

#### Recommended pad layout and guard distances

Feed line should be designed to mach 50 Ω characteristic impedance, depending on PWB material and thickness.

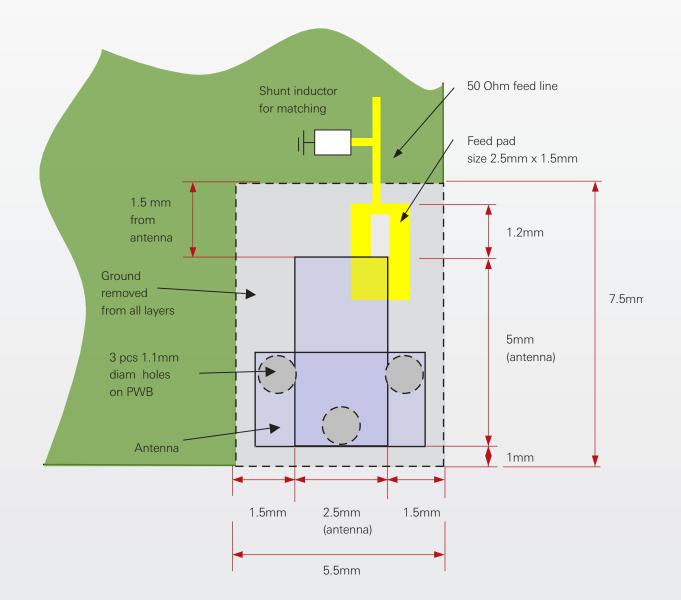

Pulse Finland Oy Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas



© 2007. All Rights Reserved

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: <u>W3108</u> <u>W3108-K</u>