

High Frequency Ceramic Solutions

2450 MHz EIA 0603 RF Balun

P/N 2450BL14C100

Detail Specification: 2/7/2018

Page 1 of 4

General Specifications

Part Number	2450BL14C100
Frequency (MHz)	2400 ~ 2500
Unbalanced Impedance (single ended)	50 Ω
Balanced Differential Impedance	100 Ω
Insertion Loss	1.2 dB max.
Return Loss	9.5 dB min.
Phase Difference	180 $\pm$ 10 deg.
Amplitude Difference	1.5 dB max.
Operating Temperature	-40 to +125°C
Storage Temperature Range	-40 to +85°C



Reel Quantity	4,000 pcs
Power Capacity	1W max. (CW)


You can download measured s-parameters of this component at: <https://www.johansontechnology.com/rfbaluns>

Part Number Explanation

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450BL14C100S
		T & R	Suffix = T	Eg. 2450BL14C100T
	Termination Style	100% Tin	Suffix = None	Eg. 2450BL14C100(T or S)


Mechanical Dimensions

	In	mm
L	0.063 $\pm$ 0.004	1.60 $\pm$ 0.10
W	0.031 $\pm$ 0.004	0.80 $\pm$ 0.10
T	0.024 $\pm$ 0.004	0.60 $\pm$ 0.10
a	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
b	0.008 +0.004/0.008	0.20 +0.1/-0.15
c	0.006 $\pm$ 0.004	0.15 $\pm$ 0.10
g	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
p	0.020 $\pm$ 0.004	0.50 $\pm$ 0.10

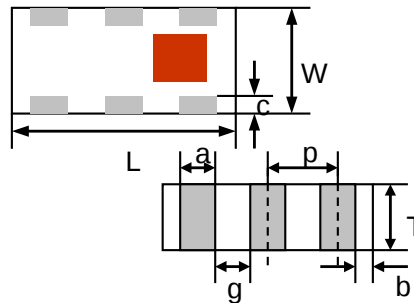


Terminal Configuration

1	Unbalanced Port
2	GND, or DC Bias + RF GND
3	Balanced Port
4	Balanced Port
5	GND
6	NC



Layout and Mounting Considerations

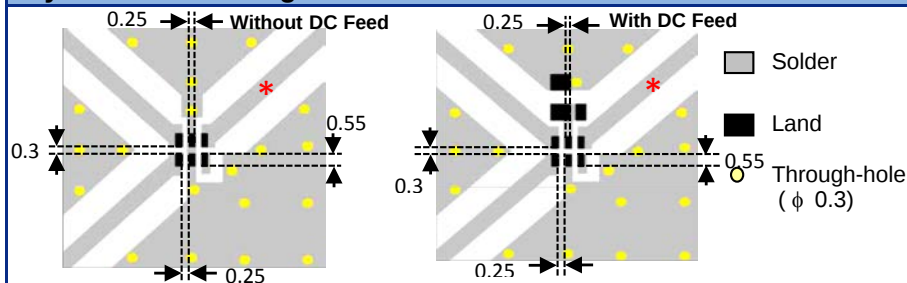

* RF trace geometry must be designed with a 50ohm characteristic impedance

Need help with the balun's layout? Want the layout file? Send us a message at: www.johansontechnology.com/component/techquestion

Mount these devices with red mark facing up. Line width should be designed to provide proper impedance matching characteristics.

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2450 MHz EIA 0603 RF Balun

P/N 2450BL14C100


Detail Specification: 2/7/2018

Page 2 of 4

Equivalent Circuit

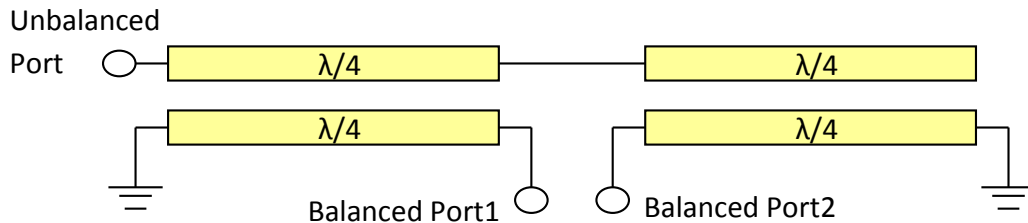

Measurement Diagram

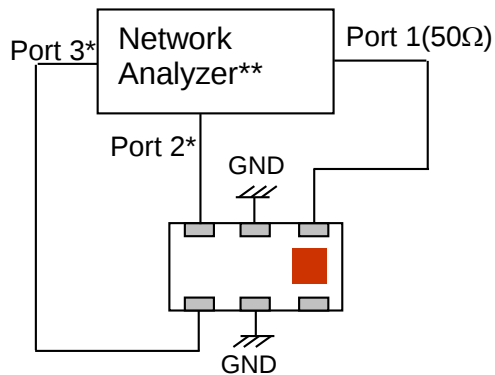

Port 1: Unbalanced Port

Ports 2 and 3: Balanced Port

$IL = S_{ds21}$

$RL = S_{ss11}$


$Amp_balance = dB(S(2,1)/S(3,1))$

$Phase_balance = Phase(S(2,1)/S(3,1))$

*Impedance for ports 2 and 3 = Balanced Impedance/2

**E5071B from Agilent

DC-Feed Recommended Capacitor

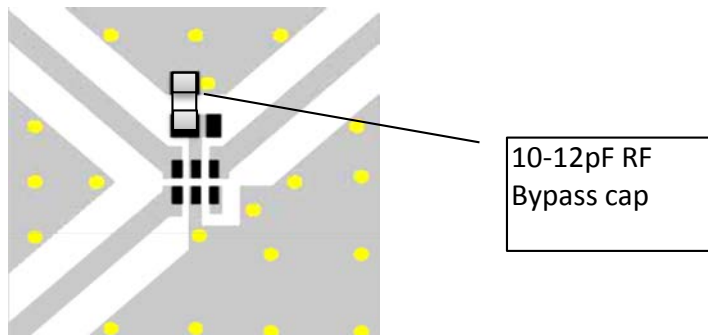

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions



2450 MHz EIA 0603 RF Balun

P/N 2450BL14C100

Detail Specification: 2/7/2018

Page 3 of 4

Typical Electrical Characteristics (T=25°C)

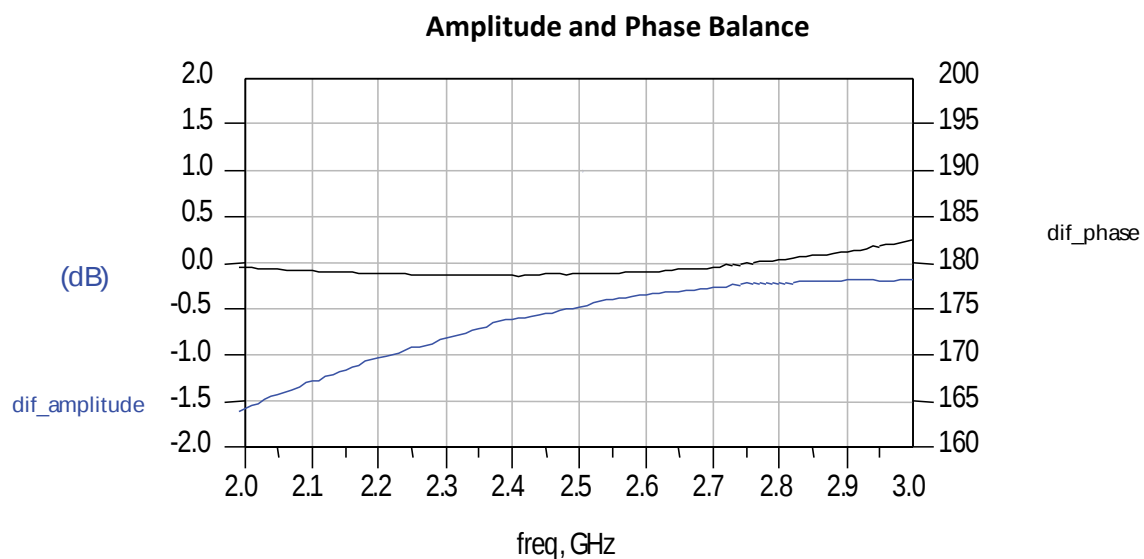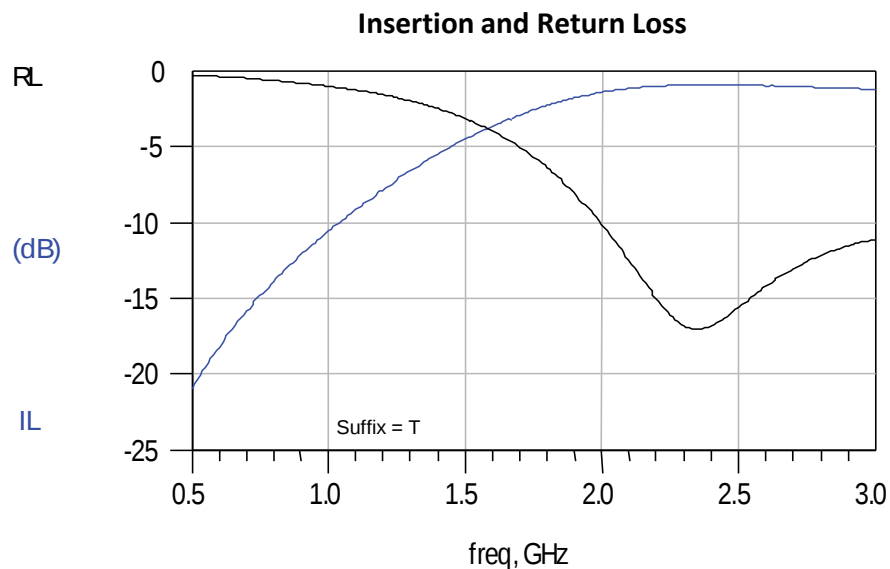

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1 2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2450 MHz EIA 0603 RF Balun

P/N 2450BL14C100

Detail Specification: 2/7/2018

Page 4 of 4

More Balun info at:

www.johansontechnology.com/rfbaluns

Packaging information

www.johansontechnology.com/ipcpackaging.html

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/ipcstorage-shelflife

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

Antenna layout and tuning techniques

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipcantennaservices

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.1

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

2018 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

[2450BL14C100T](#)