


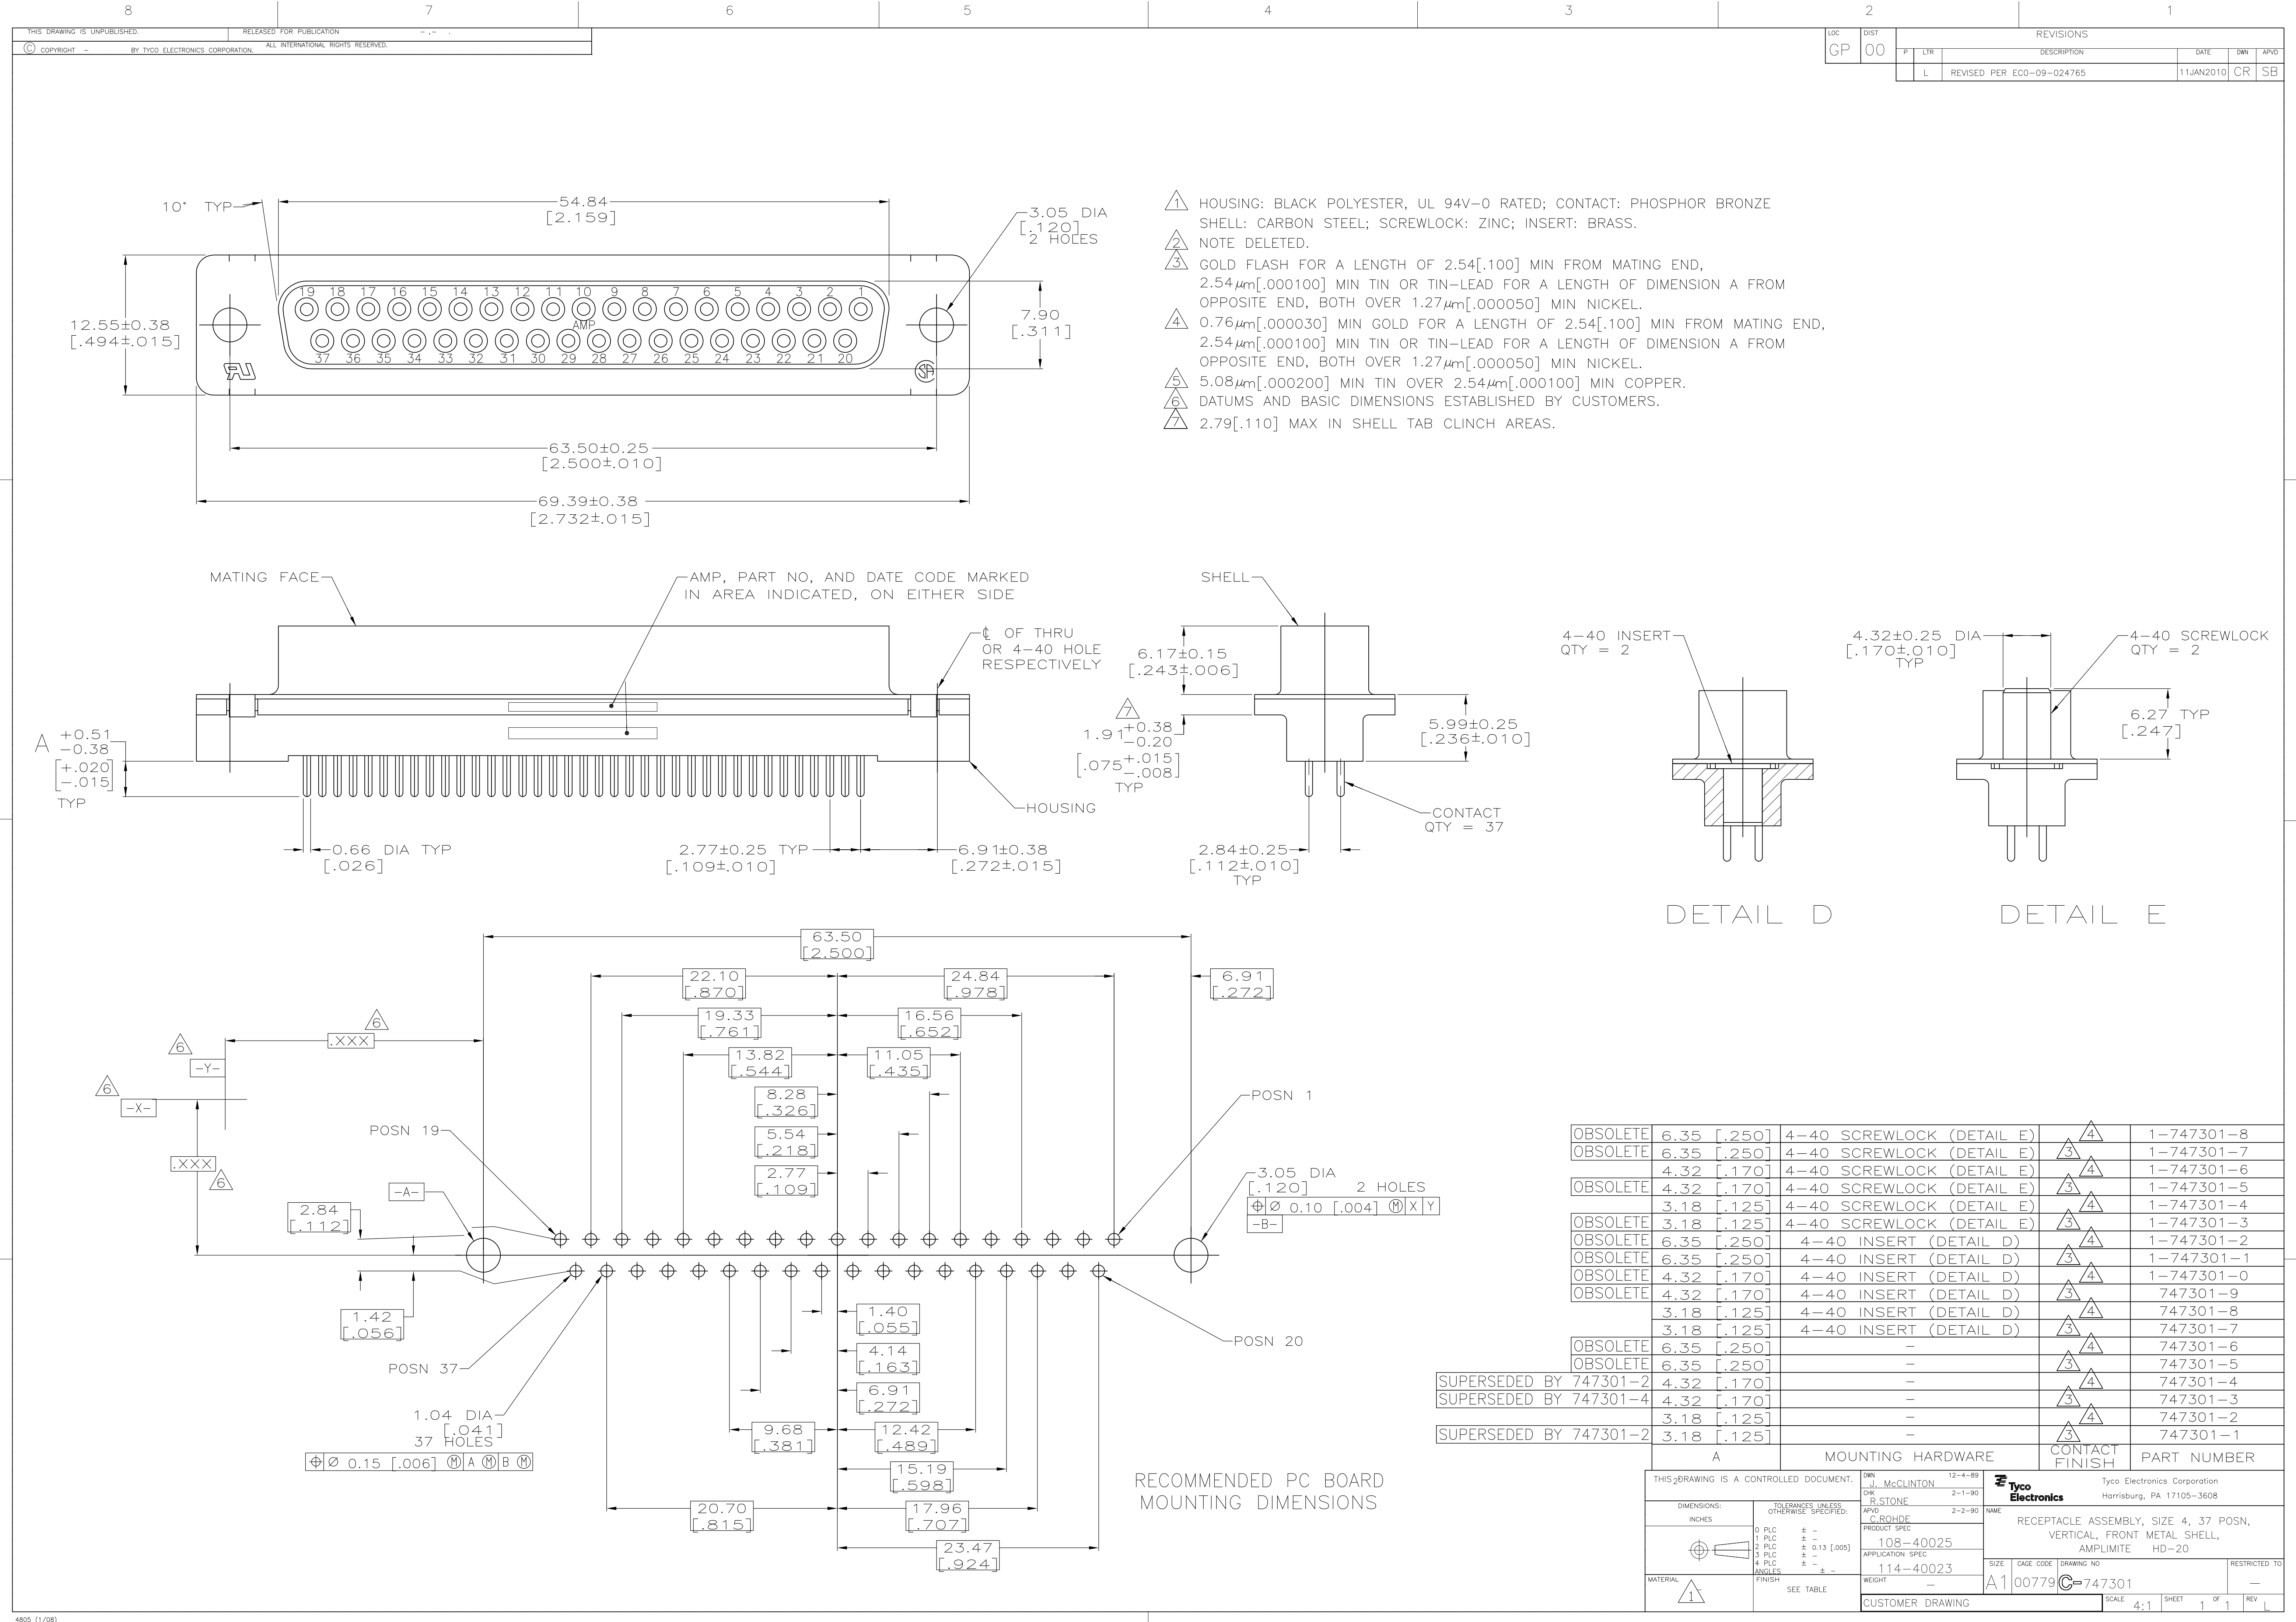

- 1 HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACT: PHOSPHOR BRONZE
SHELL: CARBON STEEL; SCREWLOCK: ZINC; INSERT: BRASS.
- 2 NOTE DELETED.
- 3 GOLD FLASH FOR A LENGTH OF 2.54[.100] MIN FROM MATING END,
2.54µm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM
OPPOSITE END, BOTH OVER 1.27µm[.000050] MIN NICKEL.
- 4 0.76µm[.000030] MIN GOLD FOR A LENGTH OF 2.54[.100] MIN FROM MATING END,
2.54µm[.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM
OPPOSITE END, BOTH OVER 1.27µm[.000050] MIN NICKEL.
- 5 5.08µm[.000200] MIN TIN OVER 2.54µm[.000100] MIN COPPER.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.
- 7 2.79[.110] MAX IN SHELL TAB CLINCH AREAS.

REVISIONS							
LOC	DIST	F	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	L		REVISED PER ECO-09-024765	11JAN2010	CR	SB

OBSOLETE	6.35 [0.250]	4-40 SCREWLOCK (DETAIL E)	1-747301-8
OBSOLETE	6.35 [0.250]	4-40 SCREWLOCK (DETAIL E)	1-747301-7
OBSOLETE	4.32 [0.170]	4-40 SCREWLOCK (DETAIL E)	1-747301-6
OBSOLETE	4.32 [0.170]	4-40 SCREWLOCK (DETAIL E)	1-747301-5
OBSOLETE	3.18 [0.125]	4-40 SCREWLOCK (DETAIL E)	1-747301-4
OBSOLETE	3.18 [0.125]	4-40 SCREWLOCK (DETAIL E)	1-747301-3
OBSOLETE	6.35 [0.250]	4-40 INSERT (DETAIL D)	1-747301-2
OBSOLETE	6.35 [0.250]	4-40 INSERT (DETAIL D)	1-747301-1
OBSOLETE	4.32 [0.170]	4-40 INSERT (DETAIL D)	1-747301-0
OBSOLETE	4.32 [0.170]	4-40 INSERT (DETAIL D)	747301-9
OBSOLETE	3.18 [0.125]	4-40 INSERT (DETAIL D)	747301-8
OBSOLETE	3.18 [0.125]	4-40 INSERT (DETAIL D)	747301-7
OBSOLETE	6.35 [0.250]	-	747301-6
OBSOLETE	6.35 [0.250]	-	747301-5
SUPERSEDED BY 747301-2	4.32 [0.170]	-	747301-4
SUPERSEDED BY 747301-4	4.32 [0.170]	-	747301-3
SUPERSEDED BY 747301-2	3.18 [0.125]	-	747301-2
SUPERSEDED BY 747301-2	3.18 [0.125]	-	747301-1

A	MOUNTING HARDWARE	CONTACT FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN J. McCLINTON 12-4-89 CHK R. STONE 2-1-90	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [0.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	NAME C. ROHDE PRODUCT SPEC 108-40025 APPLICATION SPEC 114-40023	RECEPTACLE ASSEMBLY, SIZE 4, 37 POSN, VERTICAL, FRONT METAL SHELL, AMPLIMITE HD-20
MATERIAL 1	SEE TABLE	SIZE A1 CAGE CODE 00779 DRAWING NO 747301	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 REV L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[747301-7](#)