

SCALE 2:1
WITH PANEL STOPS


P/N	WIRE NUMBERS LOADED	PLATING	DIM A
91133-088	ALL	5u" Au + high performance lubricant	3.70±0.50mm
91133-088LF	ALL	5u" Au + high performance lubricant	3.70±0.50mm
91133-188LF	ALL	5u" Au + high performance lubricant	4.50±0.50mm

mat'l. code	surface	tolerance	projection	product family
l'trecn n'dr	ISD1302	ISD1011	ISD1046	MOD JACK
A 150092	CL 04/03/95	tolerances unless otherw's specified	mm	8 POS VERT PCB M/J ASSY, DIAMOND PEG, SHIELDED
B 150378	CL 12/18/95	0.XX±0.3	scale 2.0	awg no 91133
C T03-0443	WL 10/06/03	0.XX±0.15		sheet 1 of 3
D N05-0019	YS 01/27/05	0.XXX±0.05		type Product Customer Drawing
E ELX-N-010982	SH MM 03/14/12	C L FENG	03/02/95	
F ELX-N-13788	Henry 01/10/13	enGR TONY CHIEN	03/02/95	
G ELX-N-14055	Henry 02/18/13	SH MIMO	03/21/12	
Sheet	revisio'n	G G		
index	Sheet	1 2 3		



NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60mm ;
2. HOUSING MATERIAL: NYLON 66, 25% G.F UL 94V-0, BLACK.
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
4. METAL SHELL MATERIAL: COPPER ALLOY 0.20mm THICK
FINISH:
FOR -XXX: TIN-LEAD 100µ" THICK MIN.
FOR -XXXLF: PURE BRIGHT TIN 80µ" THICK MIN.
5. PACKAGING : GS-14-351, USE TRAY
6. ALL DIMENSIONS IN MILLIMETER.
7. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
9. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

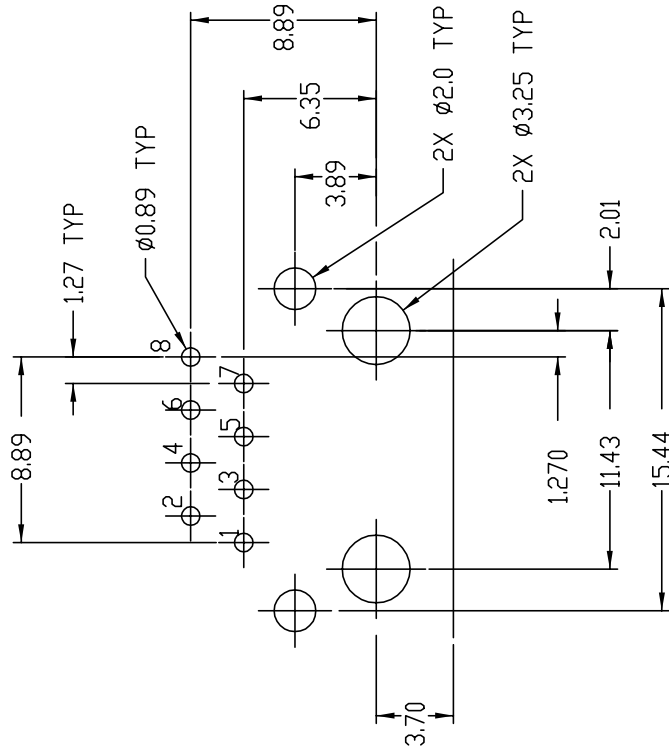

RECOMMENDED PC BOARD LAYOUT
SCALE 4:1

mat'l. code	surface	tolerance	projection	product family
ISQ1302	ISQ1001	ISQ1046	MOD JACK	
tr/electn nqdr	date	tolerances unless otherwisespecified	title	
A	04/03/95	0.XX±0.3	8 POS VERT PCB M/J ASSY,	
B	12/18/95	0.XX±0.15	DIAMOND PEG, SHIELDED	
C	10/06/03	0.XXX±0.05	scale 2.0	
D	01/27/05	C L FENG	awg no sheet 3 of 3 size	
E	03/14/12	enGR TONY CHIEN	A4	
F	01/10/13	enGR SH MIAO	type Product Customer Drawing	
G	02/18/13	enGR RICK BIAN	91133	
sheet index	revision			
	Sheet			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[91133-088LF](#) [91133-188LF](#)