

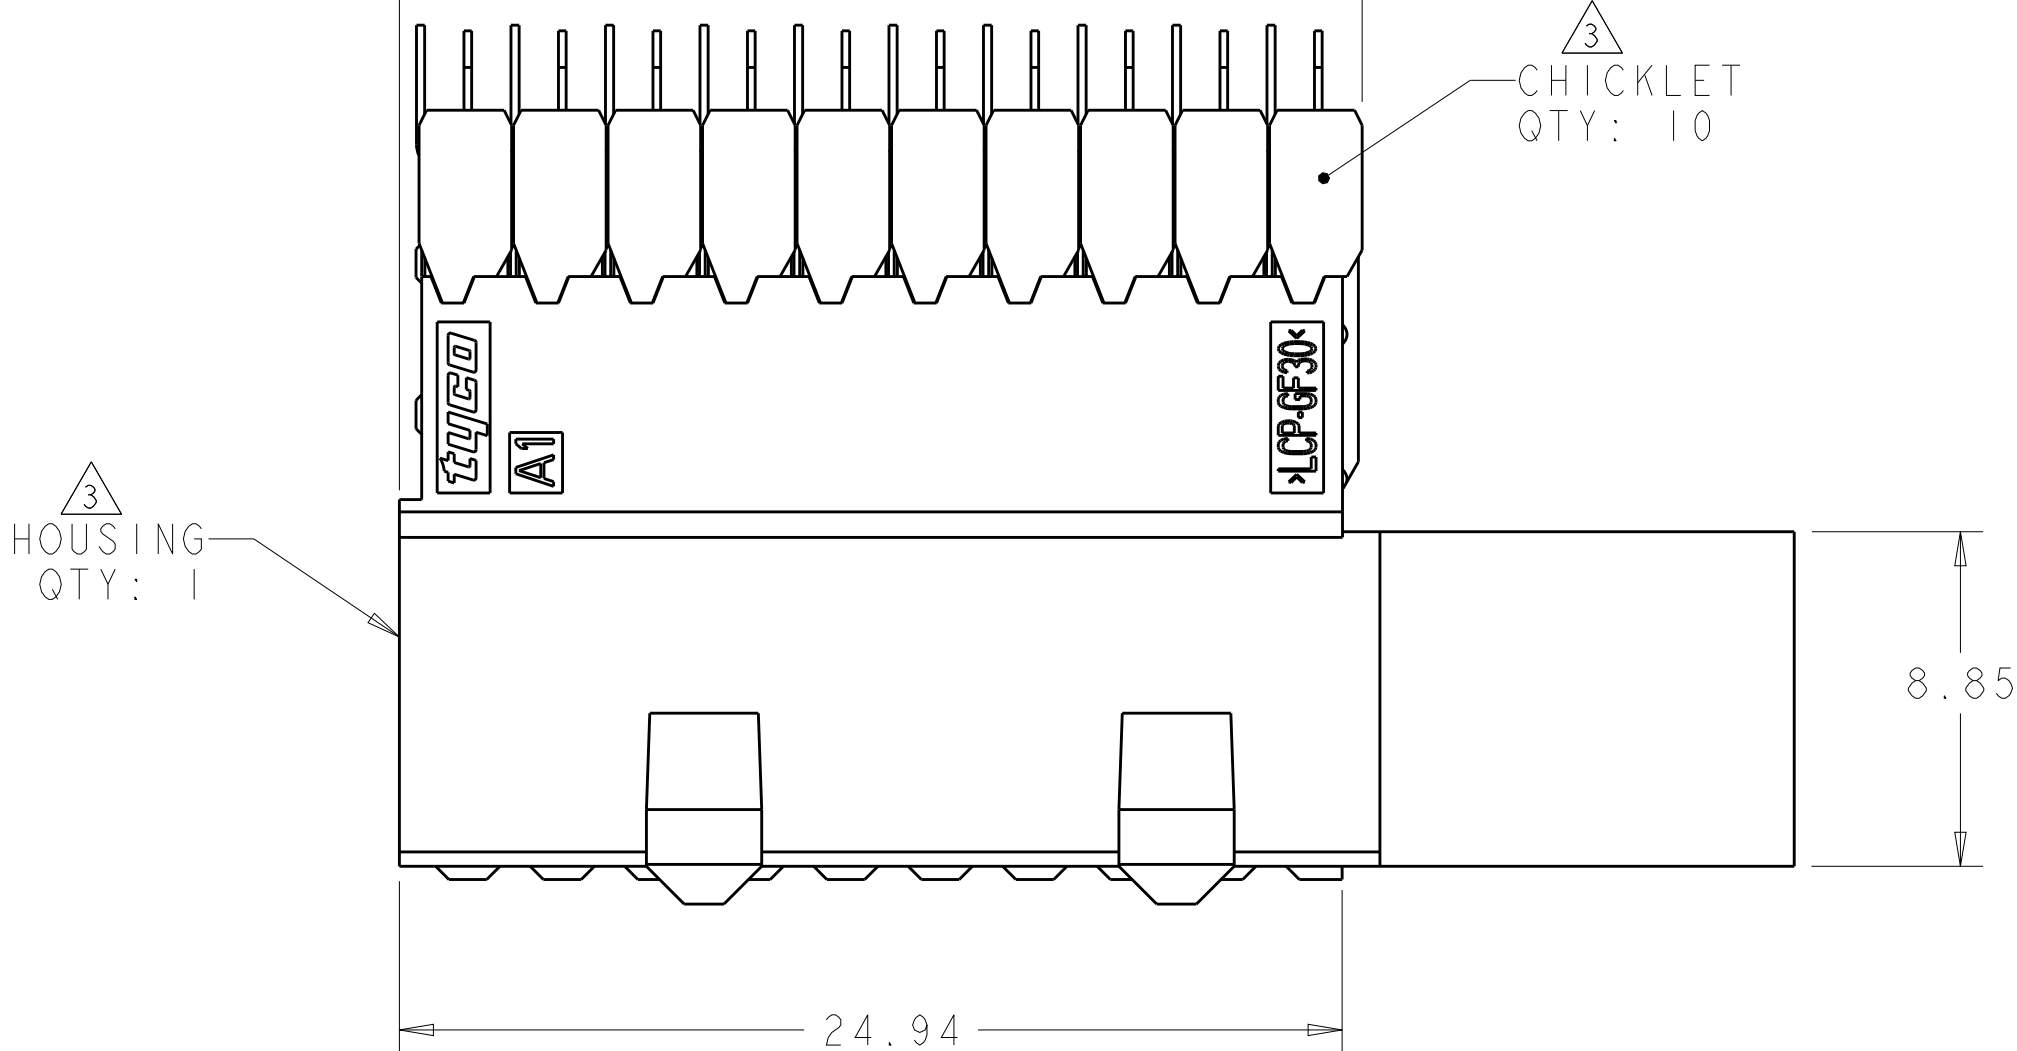
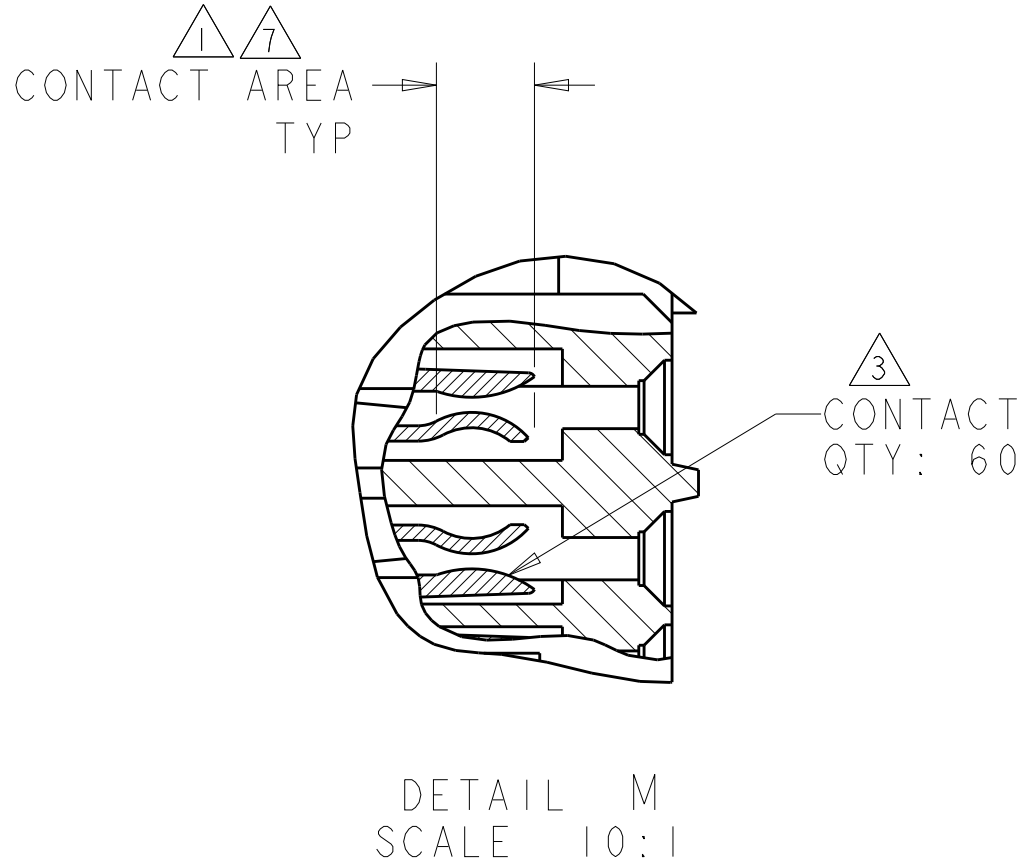
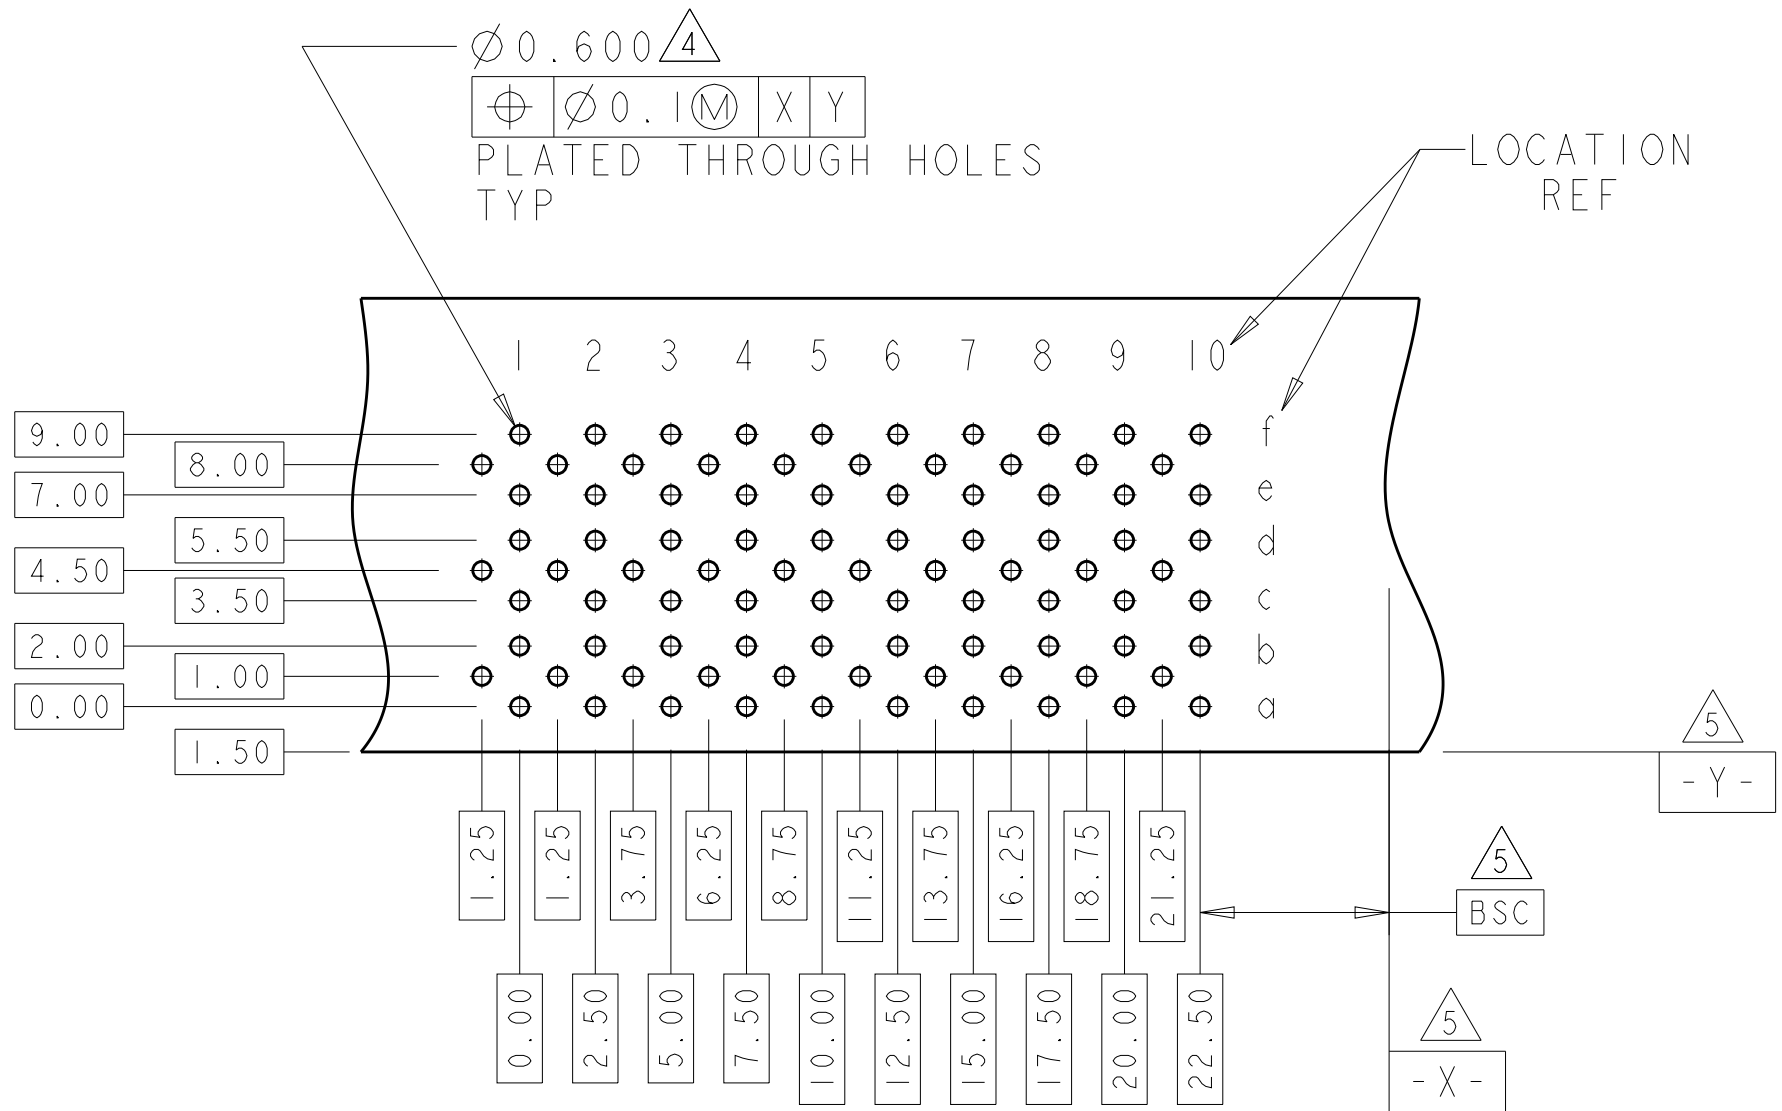
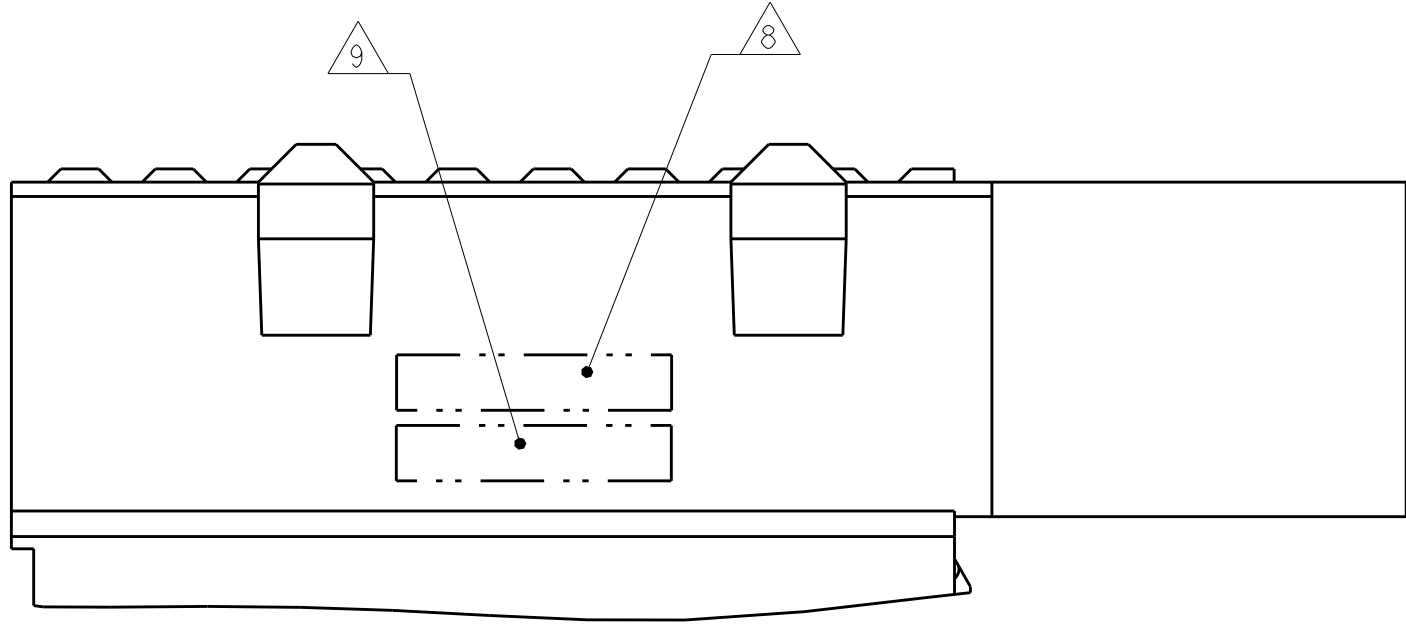



LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A	RELEASED	26SEP2012	-	JE

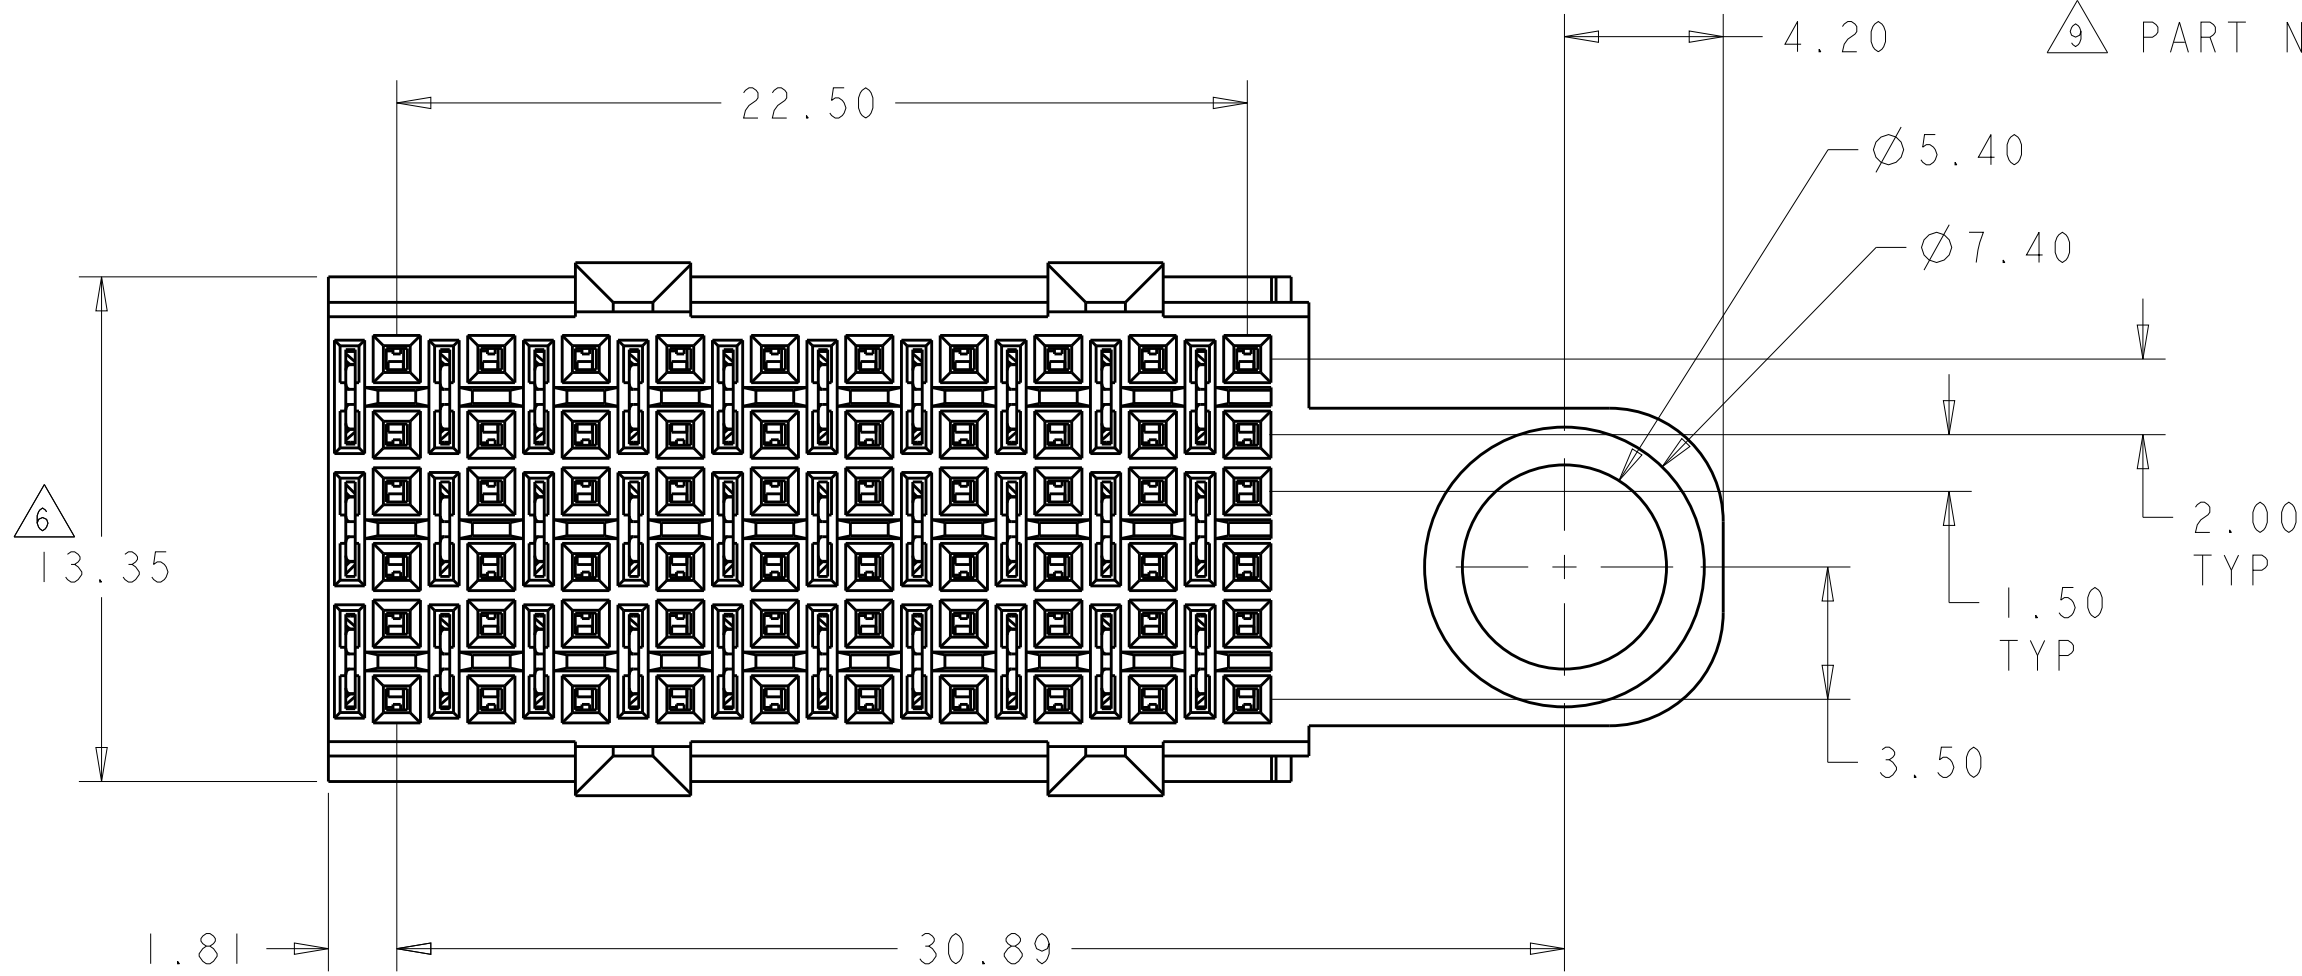

- 1 CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- 2 0.76µm MIN MATTE TIN OVER 1.27µm MIN NICKEL
- 3 MATERIAL:
CONTACT - COPPER ALLOY
SHIELD - PHOSPHER BRONZE
HOUSING AND CHICKLET - GLASS FILLED POLYESTER
- 4 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS
- 5 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER
- 6 SEATING HEIGHT TO BOARD SURFACE
- 7 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- 8 DATE CODE
- 9 PART NUMBER

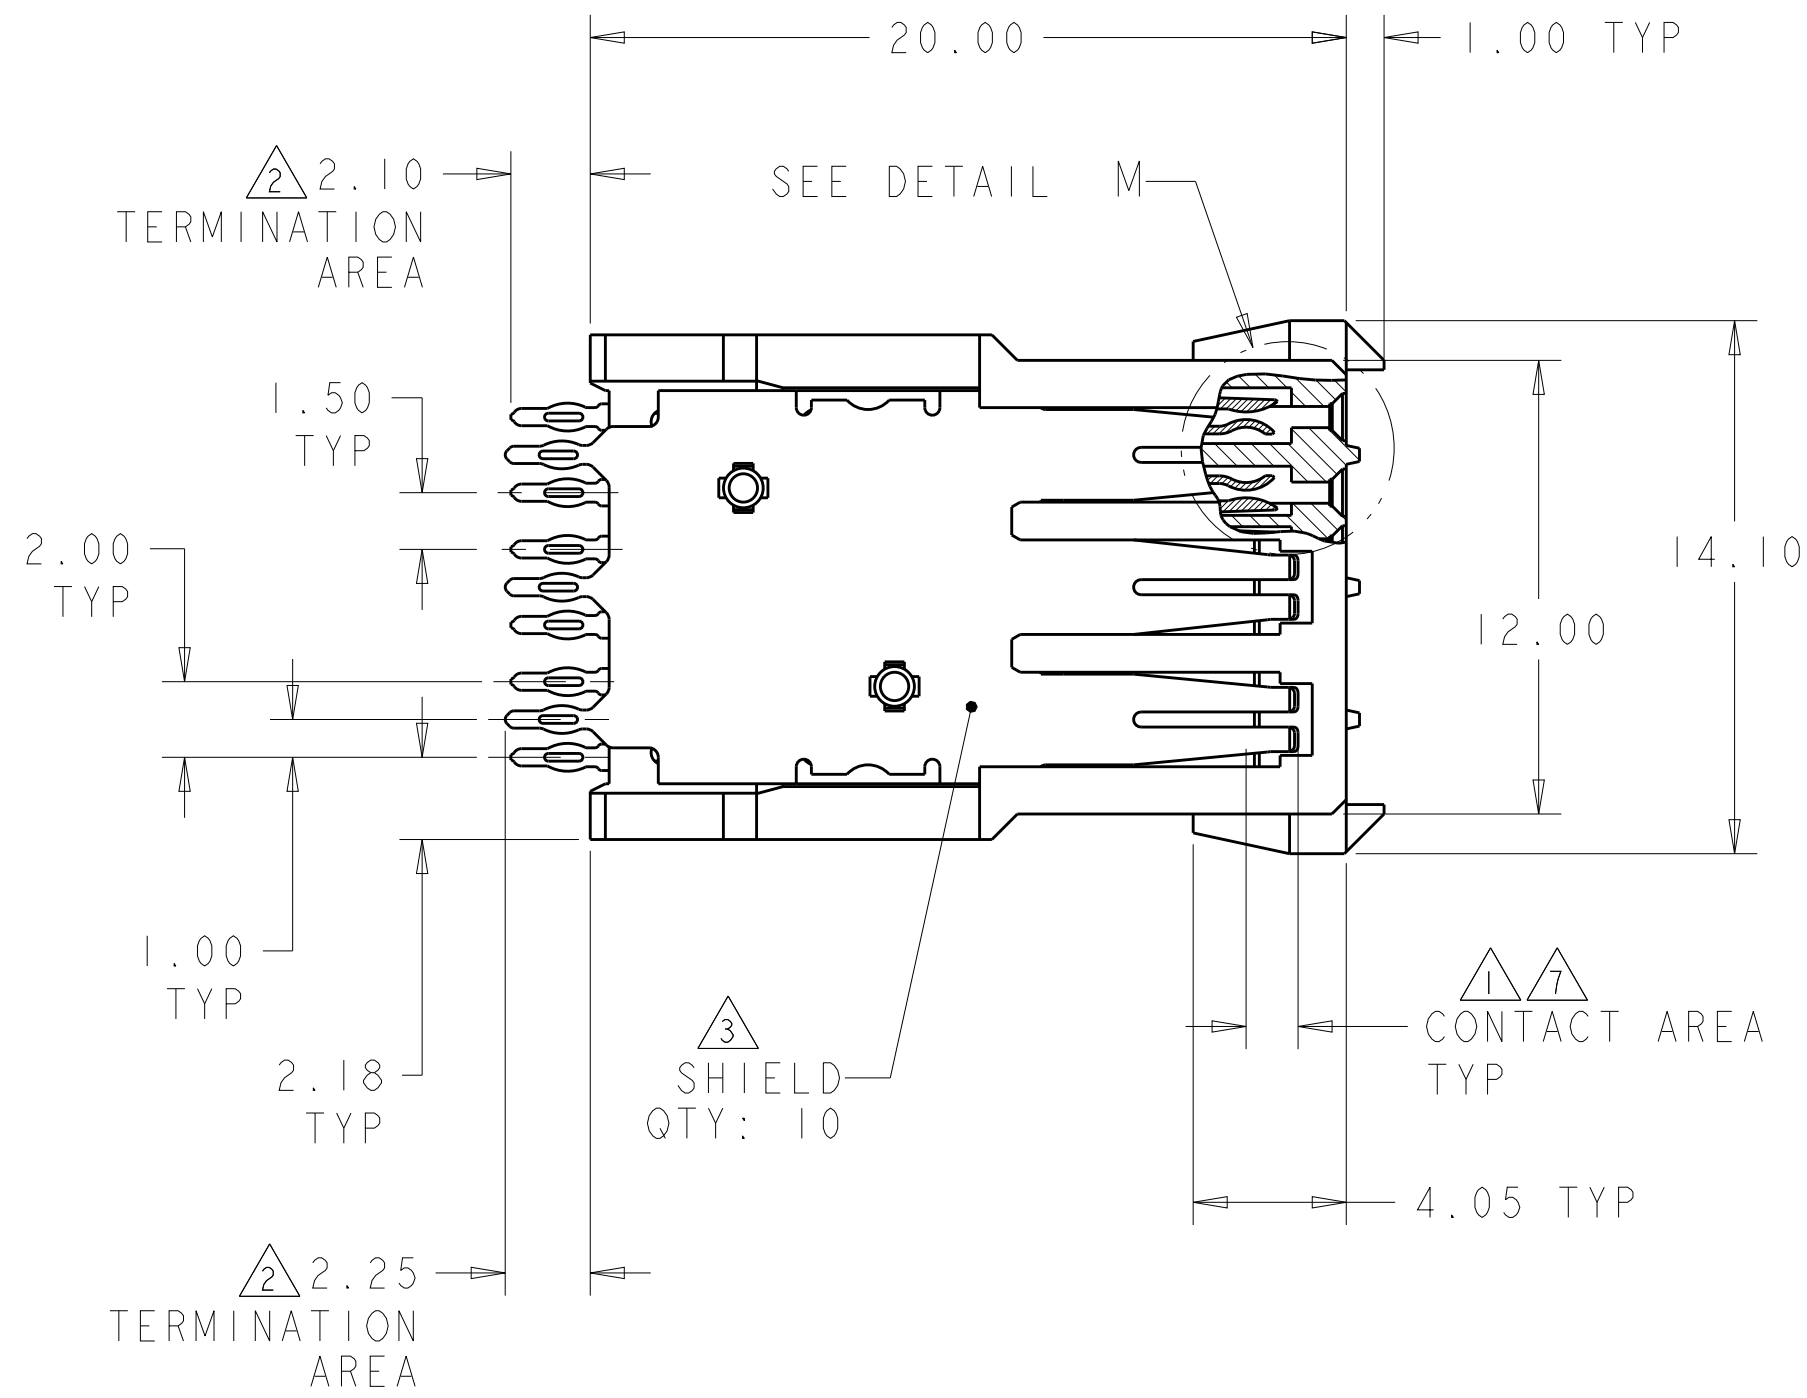

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD
SCALE 4:1

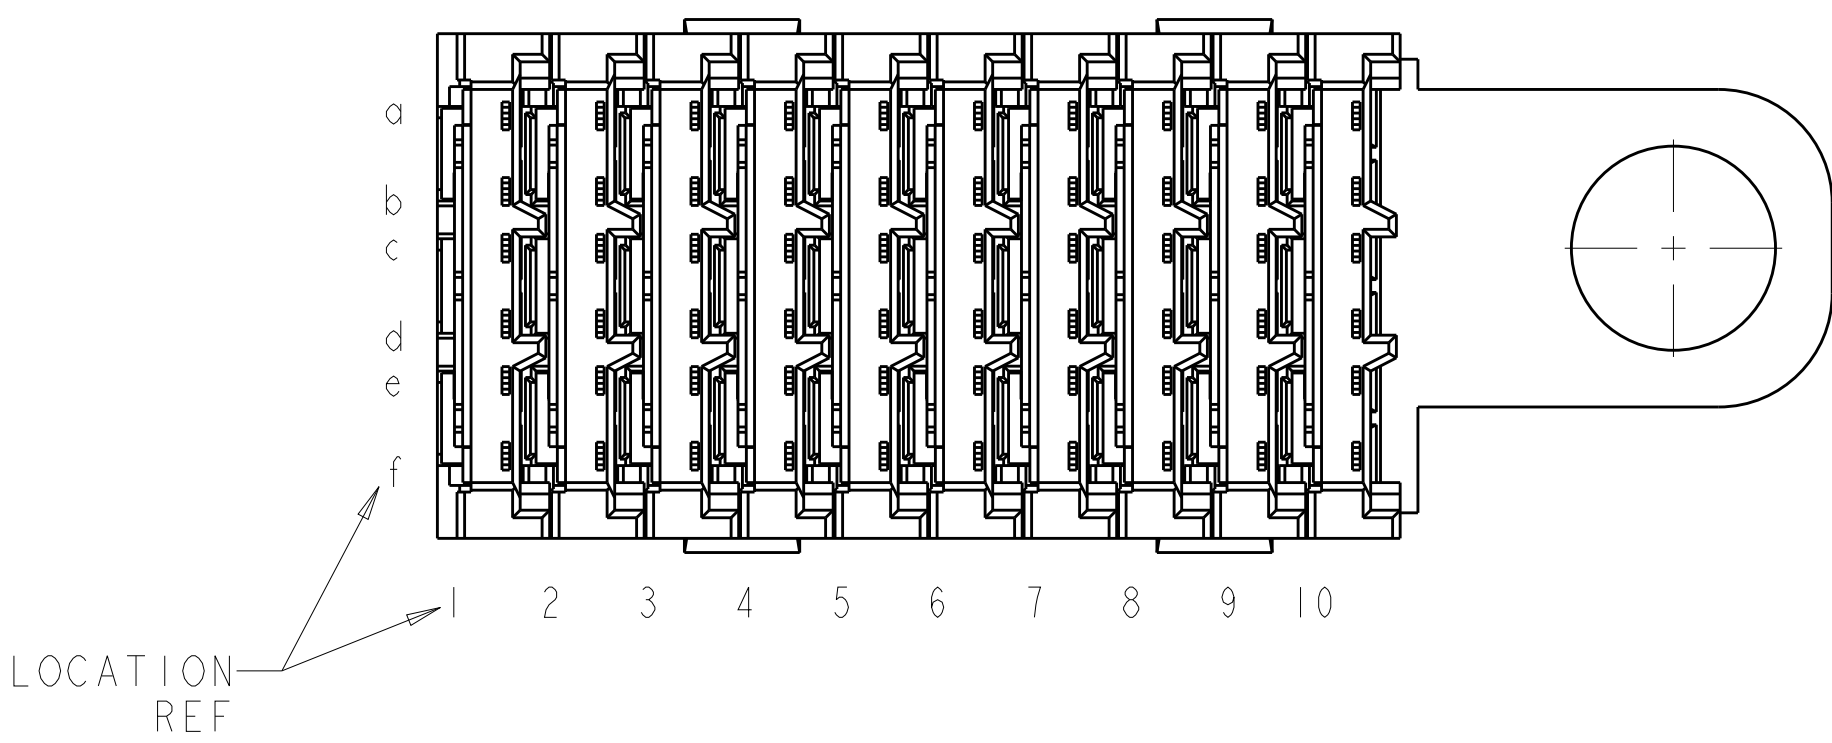

5120949-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 14SEP2004	TE Connectivity	
DIMENSIONS:		CHK R. A. PATTERSON 14SEP2004	NAME	
mm		APVD	RECEPTACLE ASSEMBLY, 6 ROW, 60 POSITION, VERTICAL, W/GUIDE MODULE, Z-PACK HS3	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	
0 PLC ±"		108-1957	CAGE CODE	
1 PLC ±0.13		APPLICATION SPEC	DRAWING NO	
2 PLC ±0.050		114-13020	RESTRICTED TO	
3 PLC ±"		WEIGHT	A100779C=5120949	
4 PLC ±"		CUSTOMER DRAWING	SCALE 5:1	
MATERIAL		SHIELD: 3	SHEET 1 OF 1	
FINISH		CONTACTS: 2	REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5120949-1](#)