
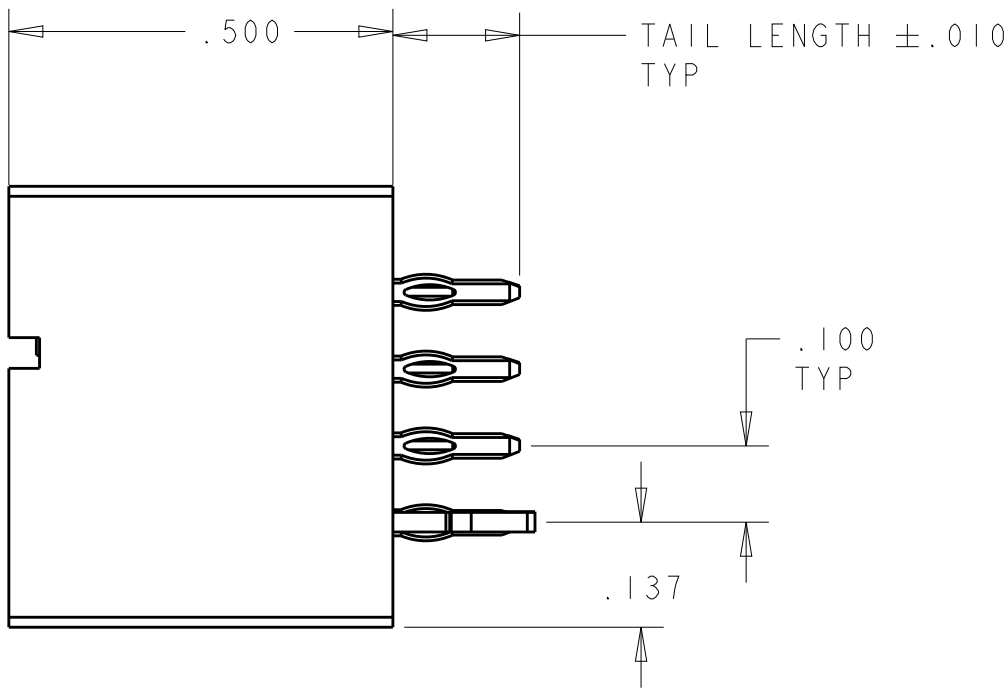
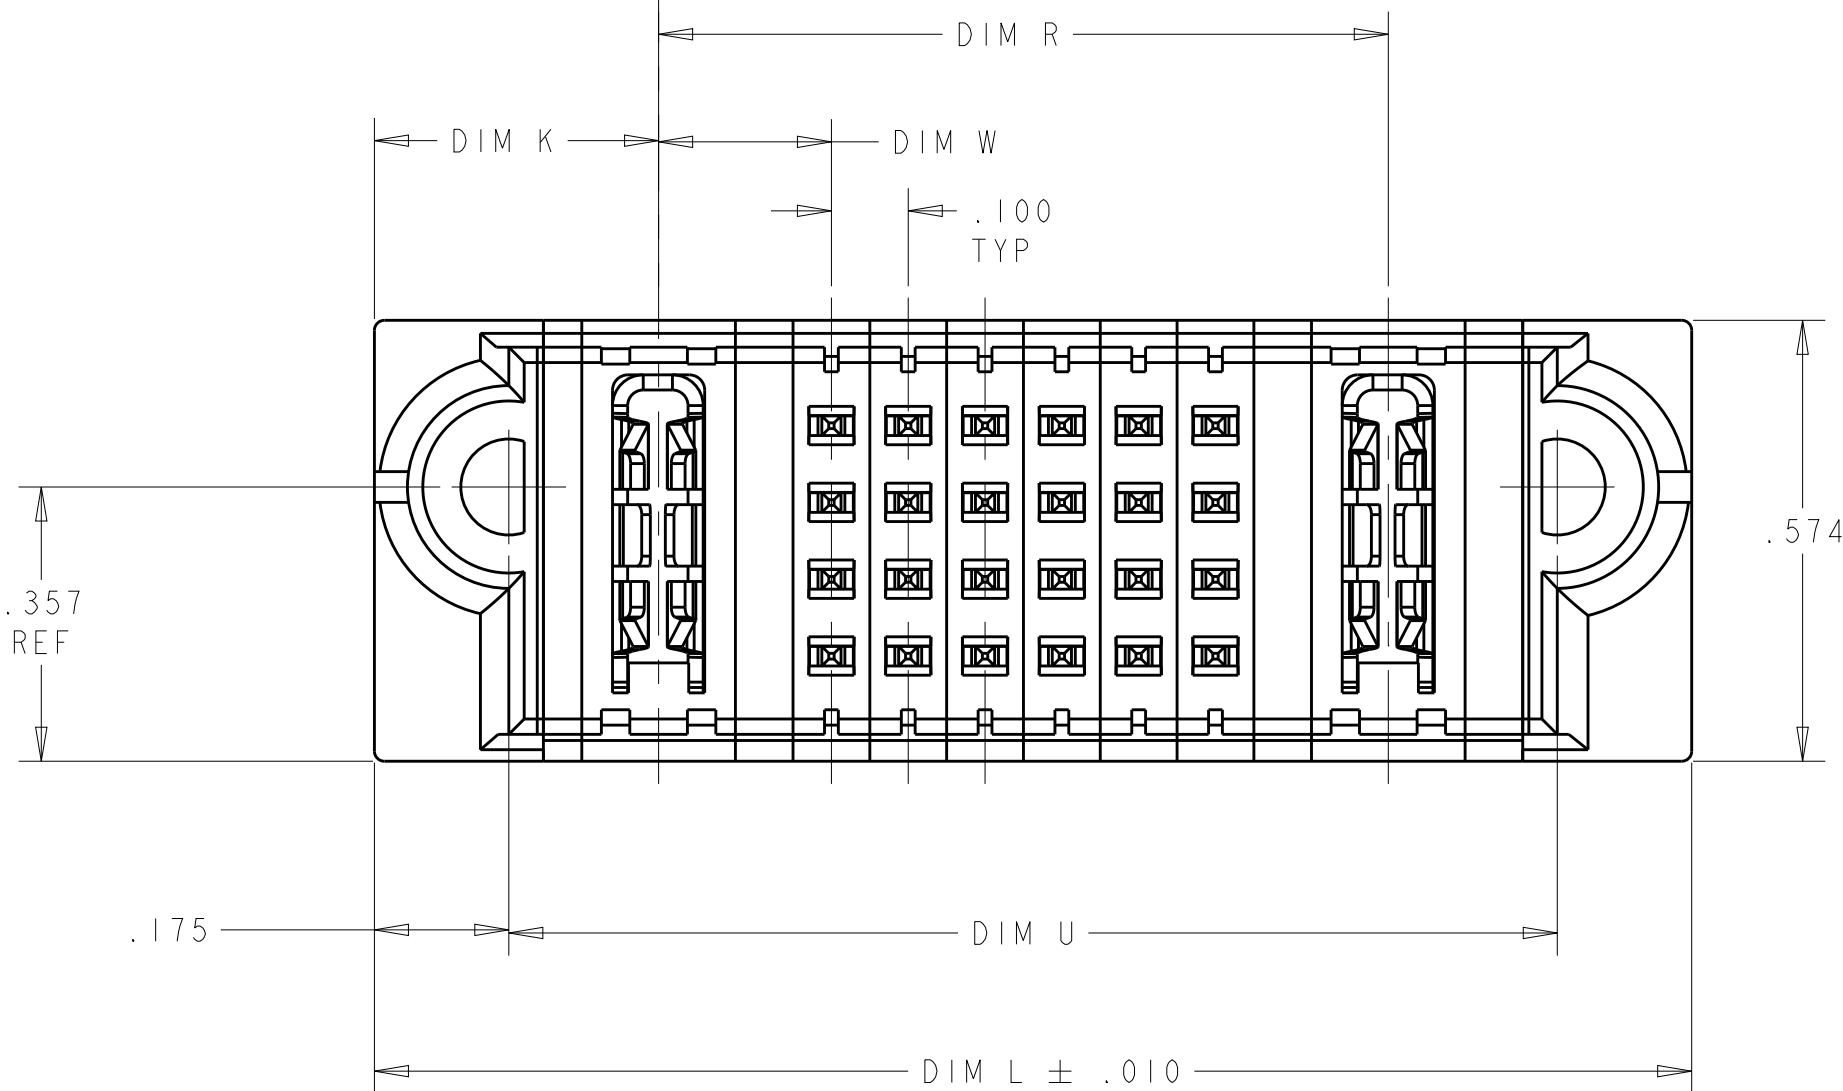
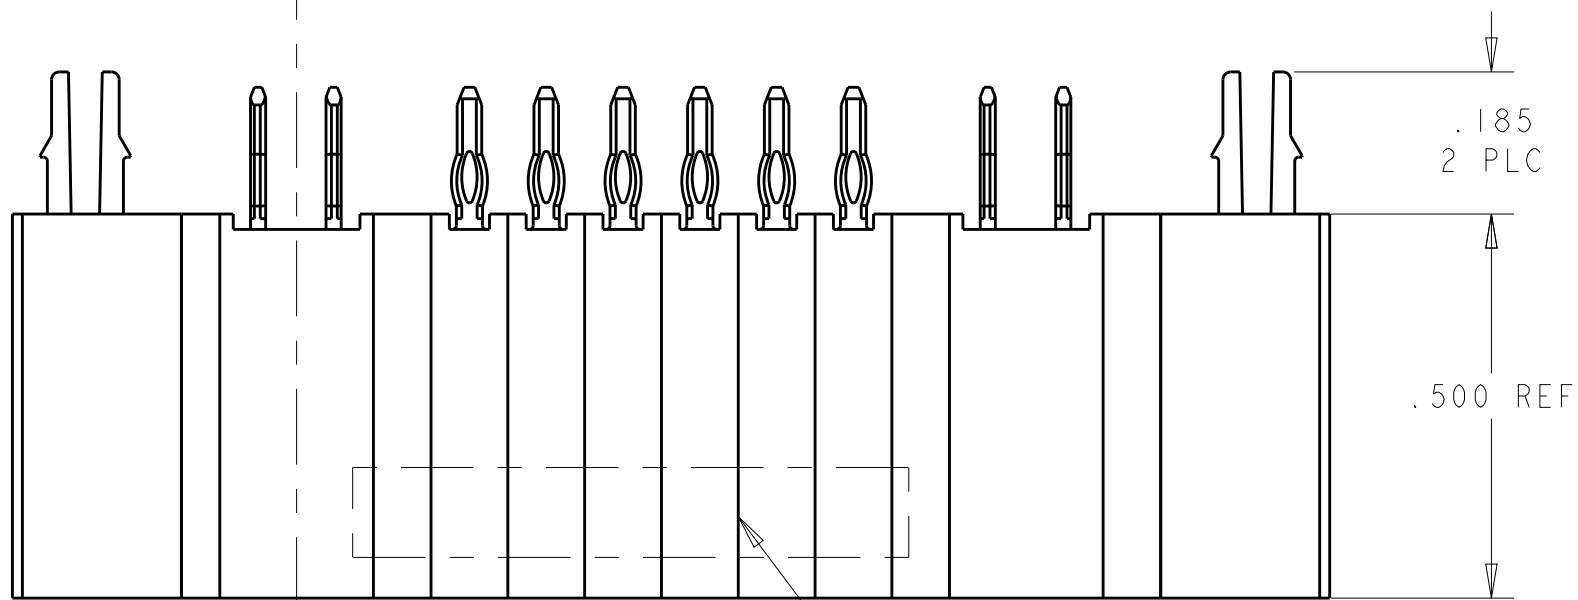


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			G6	ADD NEW PART -25	19AUG2013	AY	SZ	
			G7	UPDATE -25 MATING SEQUENCE	29AUG2013	AY	SZ	
			G8	UPDATE -25 MATING SEQUENCE	30AUG2013	AY	SZ	

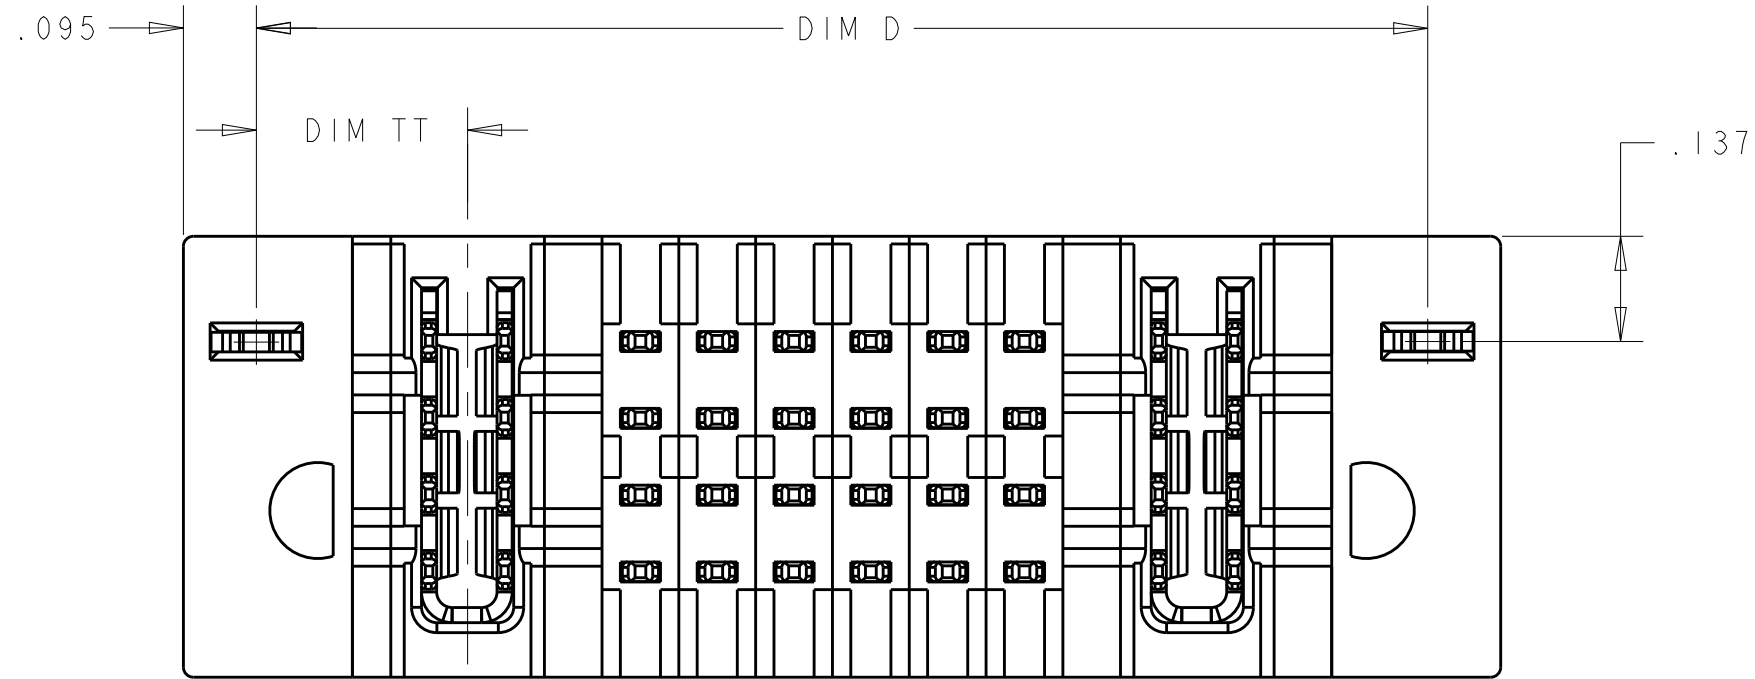

- 1

HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
- 2

CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 3

"AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
- 4

DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5

PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 6

A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13251 APPLICATION SPEC.
- 7


MECHANICAL CONNECTOR KEEP OUT ZONE.
- 8

DETAIL DIM SEE PART VIEW
- 9

FOR THE CONFIGURATION WITH VENT, PLEASE REFER TO SHEET 2.
- 10

FOR THE CONFIGURATION LP/S/LP WITH VENT, PLEASE REFER TO SHEET 3.
- 11

FOR THE CONFIGURATION LP/S/P, WITH VENT, PLEASE REFER TO SHEET 4.

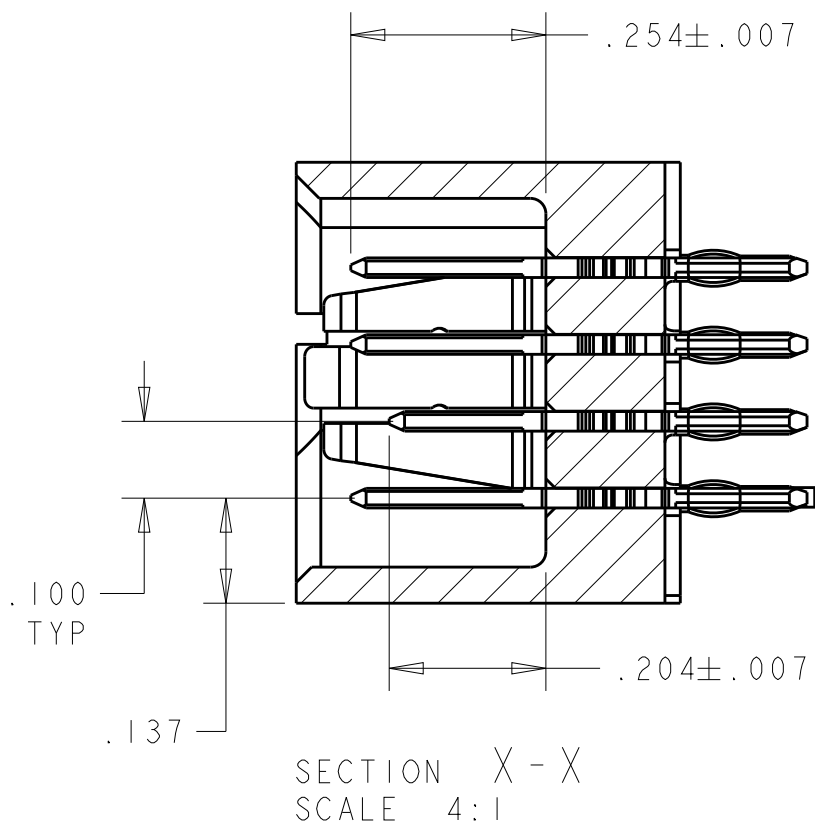

66	.240	.165	.1825	2.220	1.870	2.030	1.145	.7125	.2775	3LP + 16S + 4LP	2-6450820-5
	.200	-	.225	3.065	2.715	2.875	-	1.975	.320	10HDP + 24S	2-6450820-3
	.300	-	.275	1.790	1.440	1.600	-	1.150	.370	4ACP + 4S	2-6450820-2
	.115	.250	.2075	2.555	2.205	2.365	1.4075	.7325	.3025	6LP + 24S + 3P	2-6450820-1
	-	-	.1825	1.120	.770	.930	.565	.1575	.2775	1LP + 16S + 1LP	2-6450820-0
	.250	.250	.250	3.540	3.190	3.350	1.850	1.175	.345	5P + 24S + 5P	1-6450820-9
	.250	.250	.225	4.140	3.790	3.950	2.500	1.200	.320	5P + 48S + 5P	1-6450820-8
	.250	-	.225	4.640	4.290	4.450	-	2.950	.320	12P + 48S	1-6450820-7
	.250	-	.225	2.415	2.065	2.225	-	1.425	.320	6P + 20S	1-6450820-5
	-	.300	.175	2.665	2.315	2.475	.575	-	.270	20S + 6ACP	1-6450820-4
	.300	.300	.225	2.840	2.490	2.650	1.600	.850	.320	3ACP + 24S + 3ACP	1-6450820-3
	.250	.250	.250	4.040	3.690	3.850	2.100	1.425	.345	6P + 24S + 6P	1-6450820-1
63	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-9
	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-8
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-7
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-6
	.250	.250	.250	2.640	2.290	2.450	1.200	.925	.345	4P + 8S + 4P	6450820-5
	.250	.250	.250	3.640	3.290	3.450	1.700	1.425	.345	6P + 8S + 6P	6450820-4
	.250	.250	.275	2.790	2.440	2.600	1.550	.675	.370	3P + 32S + 3P	6450820-3
	-	-	.250	1.540	1.190	1.350	.850	.175	.345	1P + 24S + 1P	6450820-2
	-	-	.275	1.715	1.365	1.525	.950	.225	.370	1P + 24S + 1P	6450820-1
	DIM S	DIM T	DIM TT	DIM L	DIM U	DIM D	DIM R	DIM W	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.020
FINISH

-

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

SIZE
A1

CAGE CODE
6450820

DRAWING NO
100779

RESTRICTED TO
-

SHEET
1

OF
20

REV
G8


TE Connectivity

SCALE
-

SHEET
1

OF
20

REV
G8




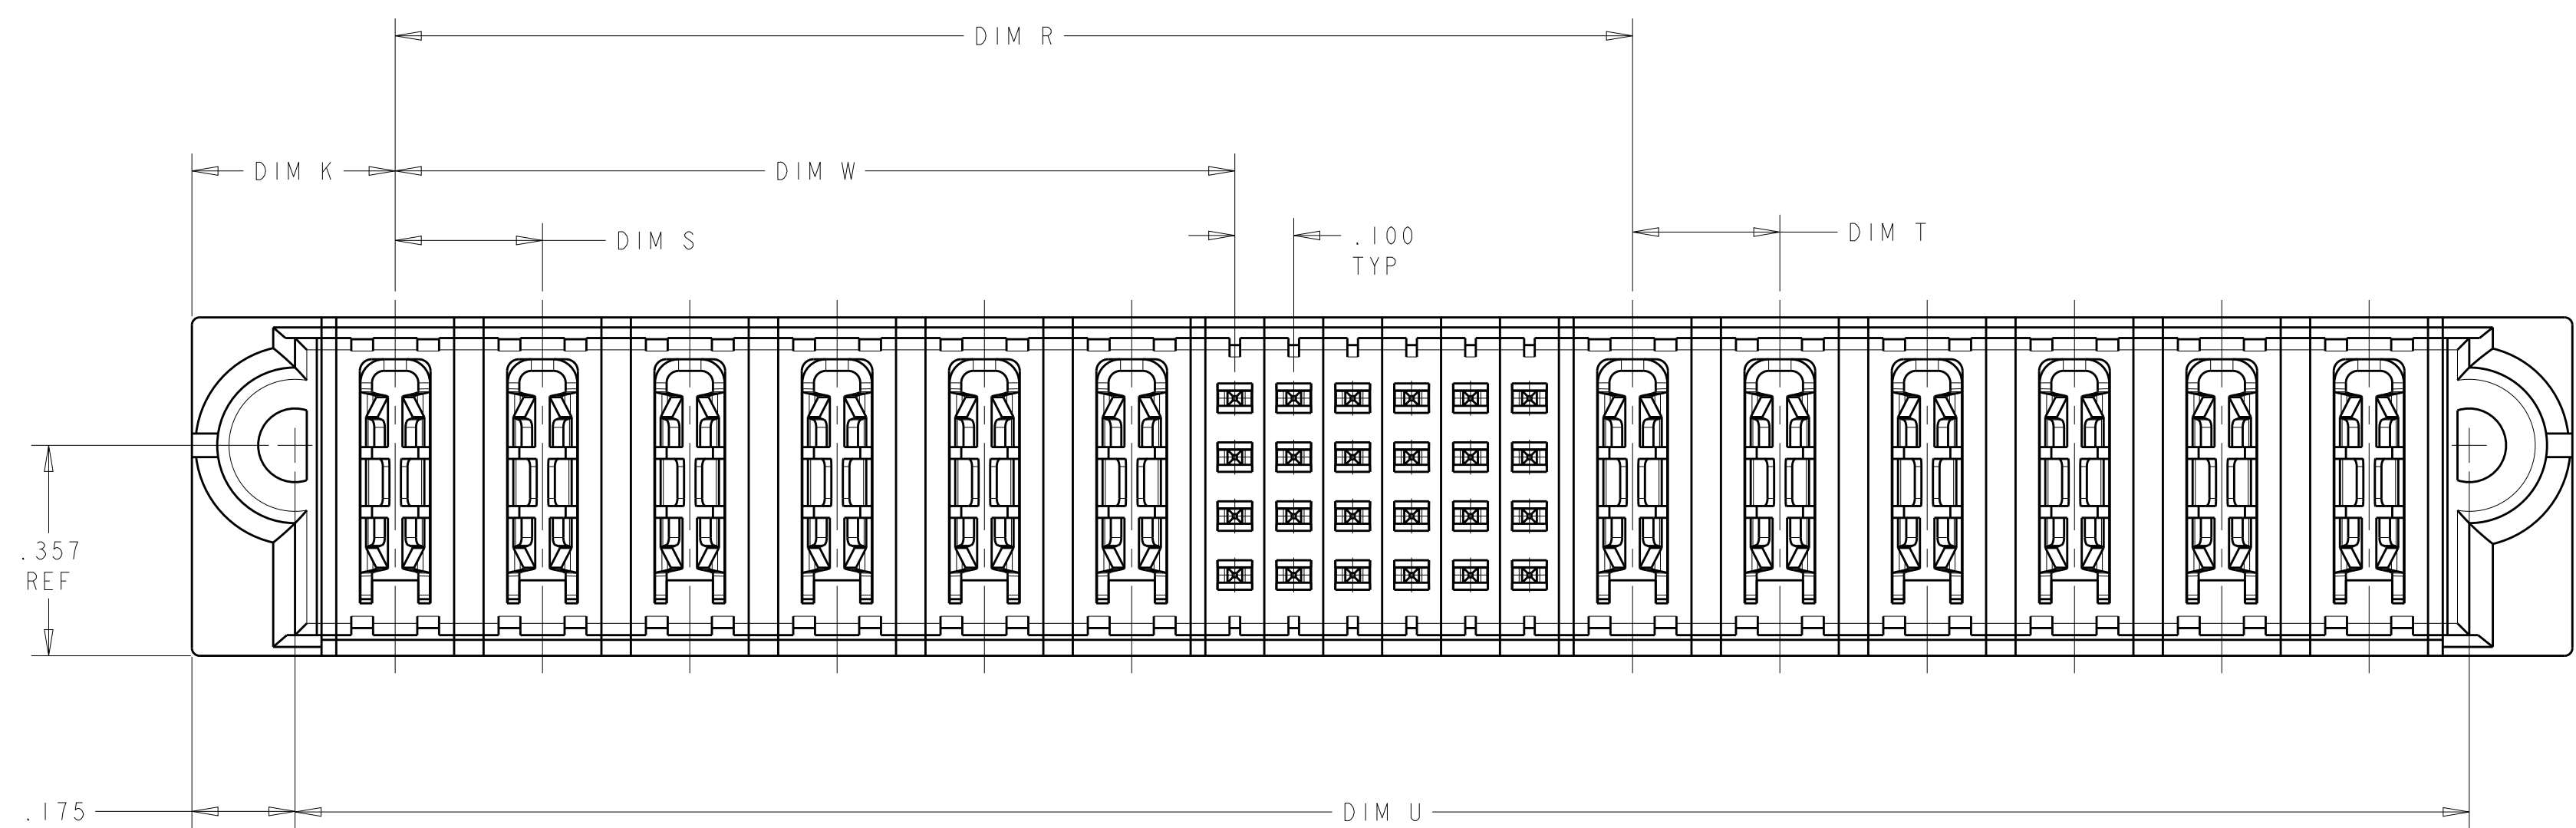


Technical drawing of a component with dimensions:

- Overall width: .500
- Contact tail length (typical): $.165 \pm .010$
- Overall height: .574
- Dimension from bottom edge to center of contact: .100 TYP
- Dimension from bottom edge to center of contact (alternative): .137


4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

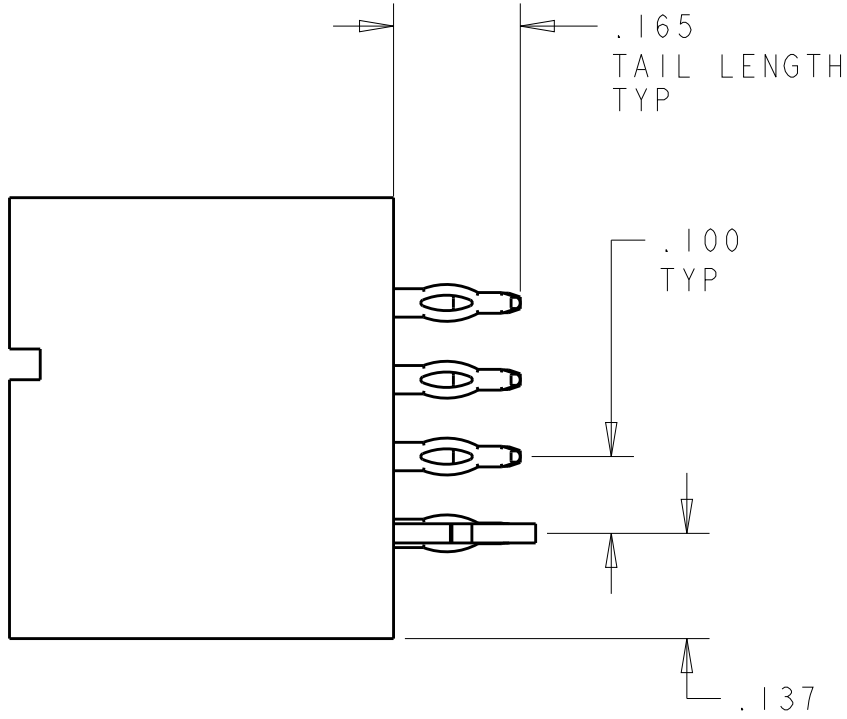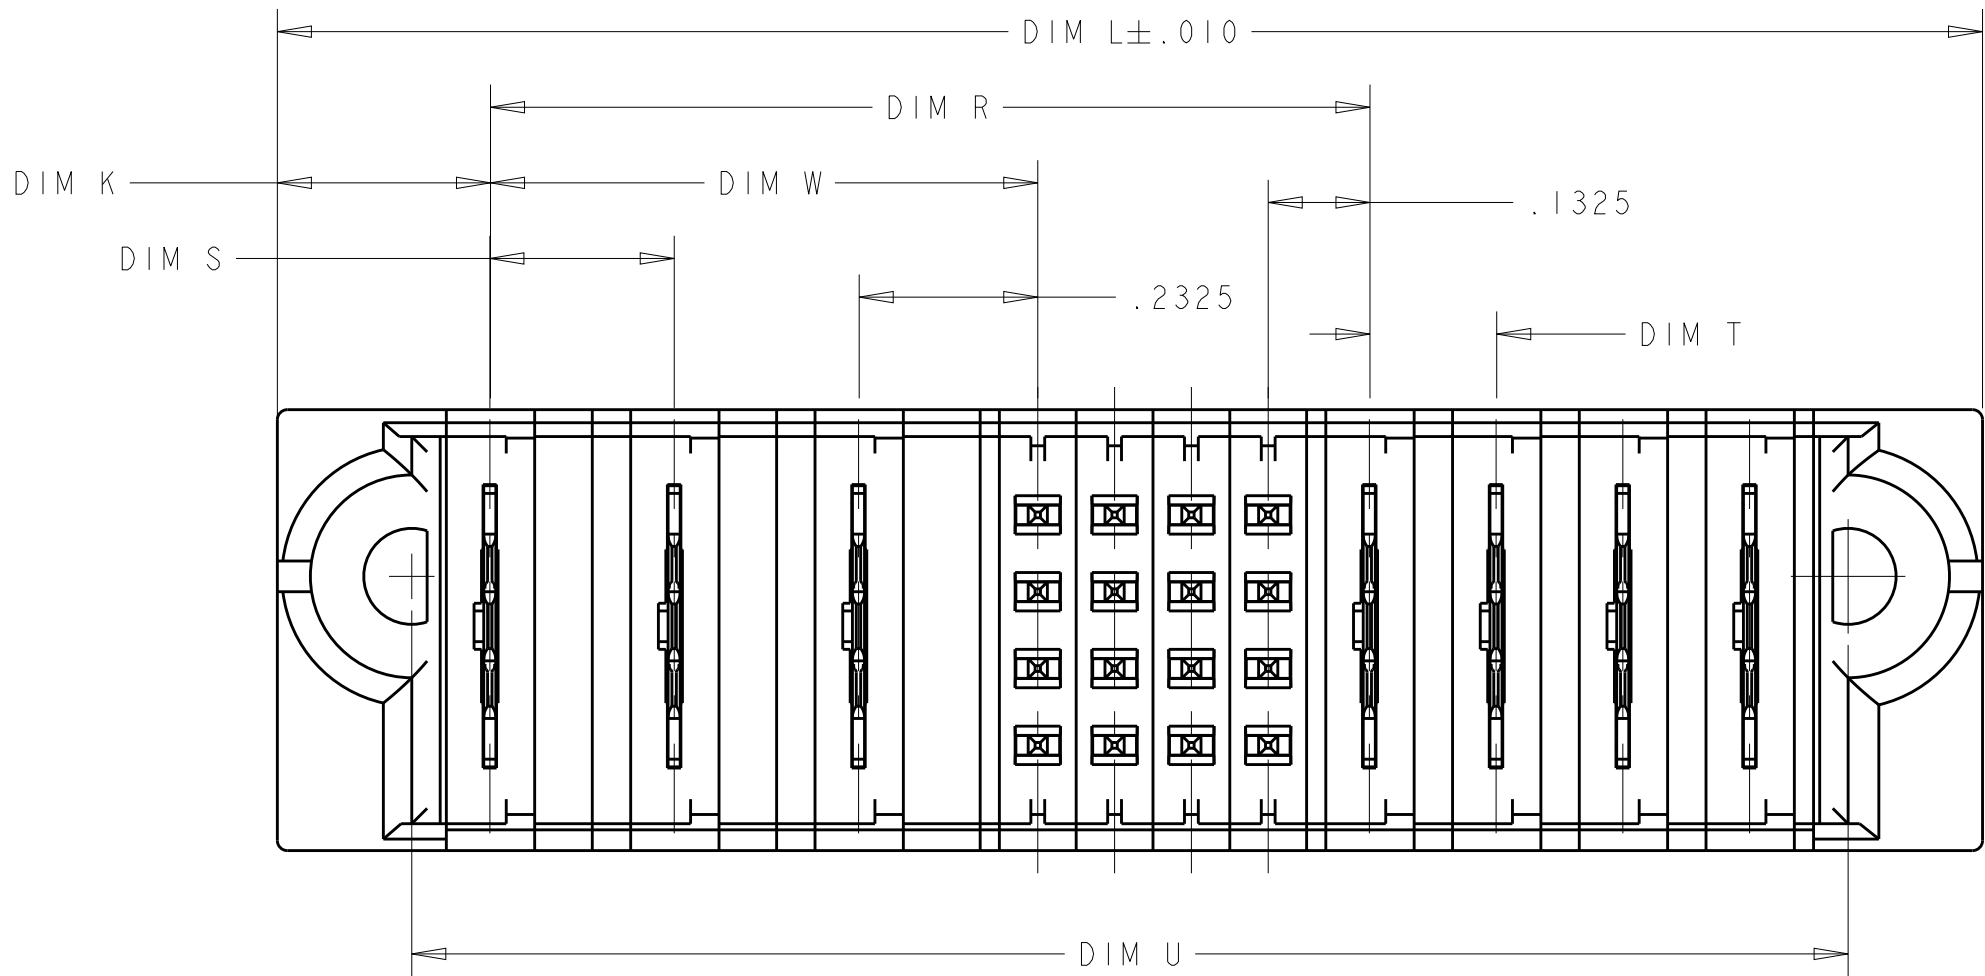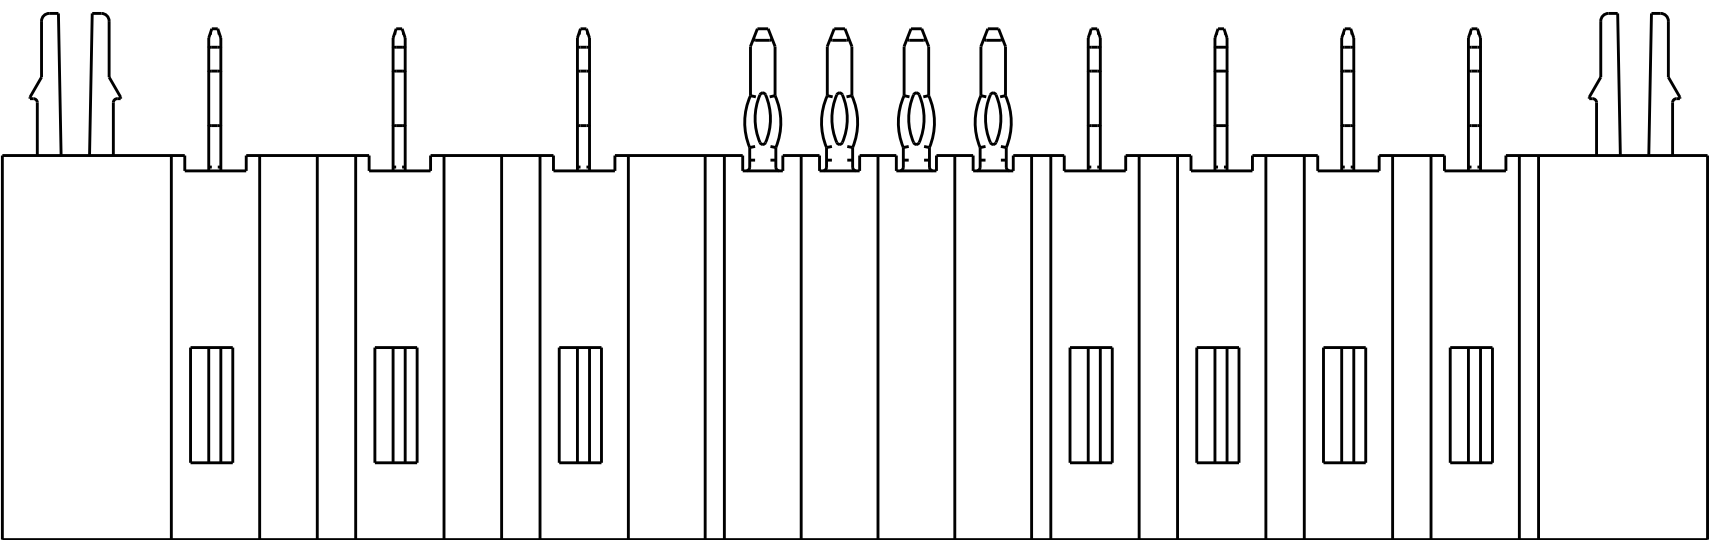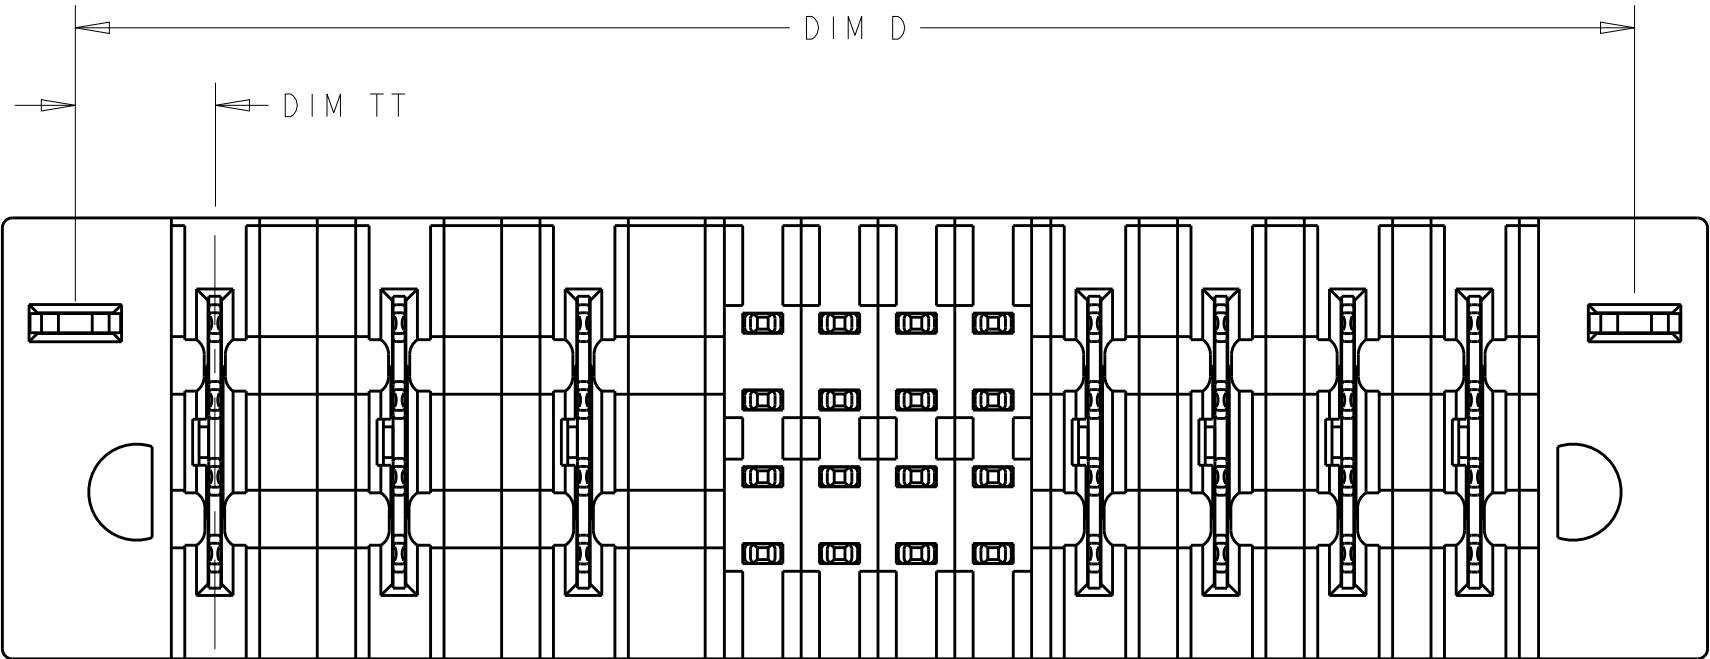

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH		PRODUCT SPEC	
				108-2292	
				APPLICATION SPEC	
				114-13251	
MATERIAL		WEIGHT		SIZE	
-		-		A100779C=6450820	
		Customer Drawing		RESTRICTED TO	
				SCALE	
				SHEET 3 OF 20	
				REV G8	


PART NUMBER	ROWS		SIGNAL					POWER						
			1	2	3	4	5	P1	P2	P3	P4	P5	P6	
1-6450820-4	D		EV	EV	EV	EV	EV							
	EV		EV	EV	EV	EV								
	EV		EV	EV	EV	EV								
	ES		EV	EV	EV	EV								
20S + 6ACP														

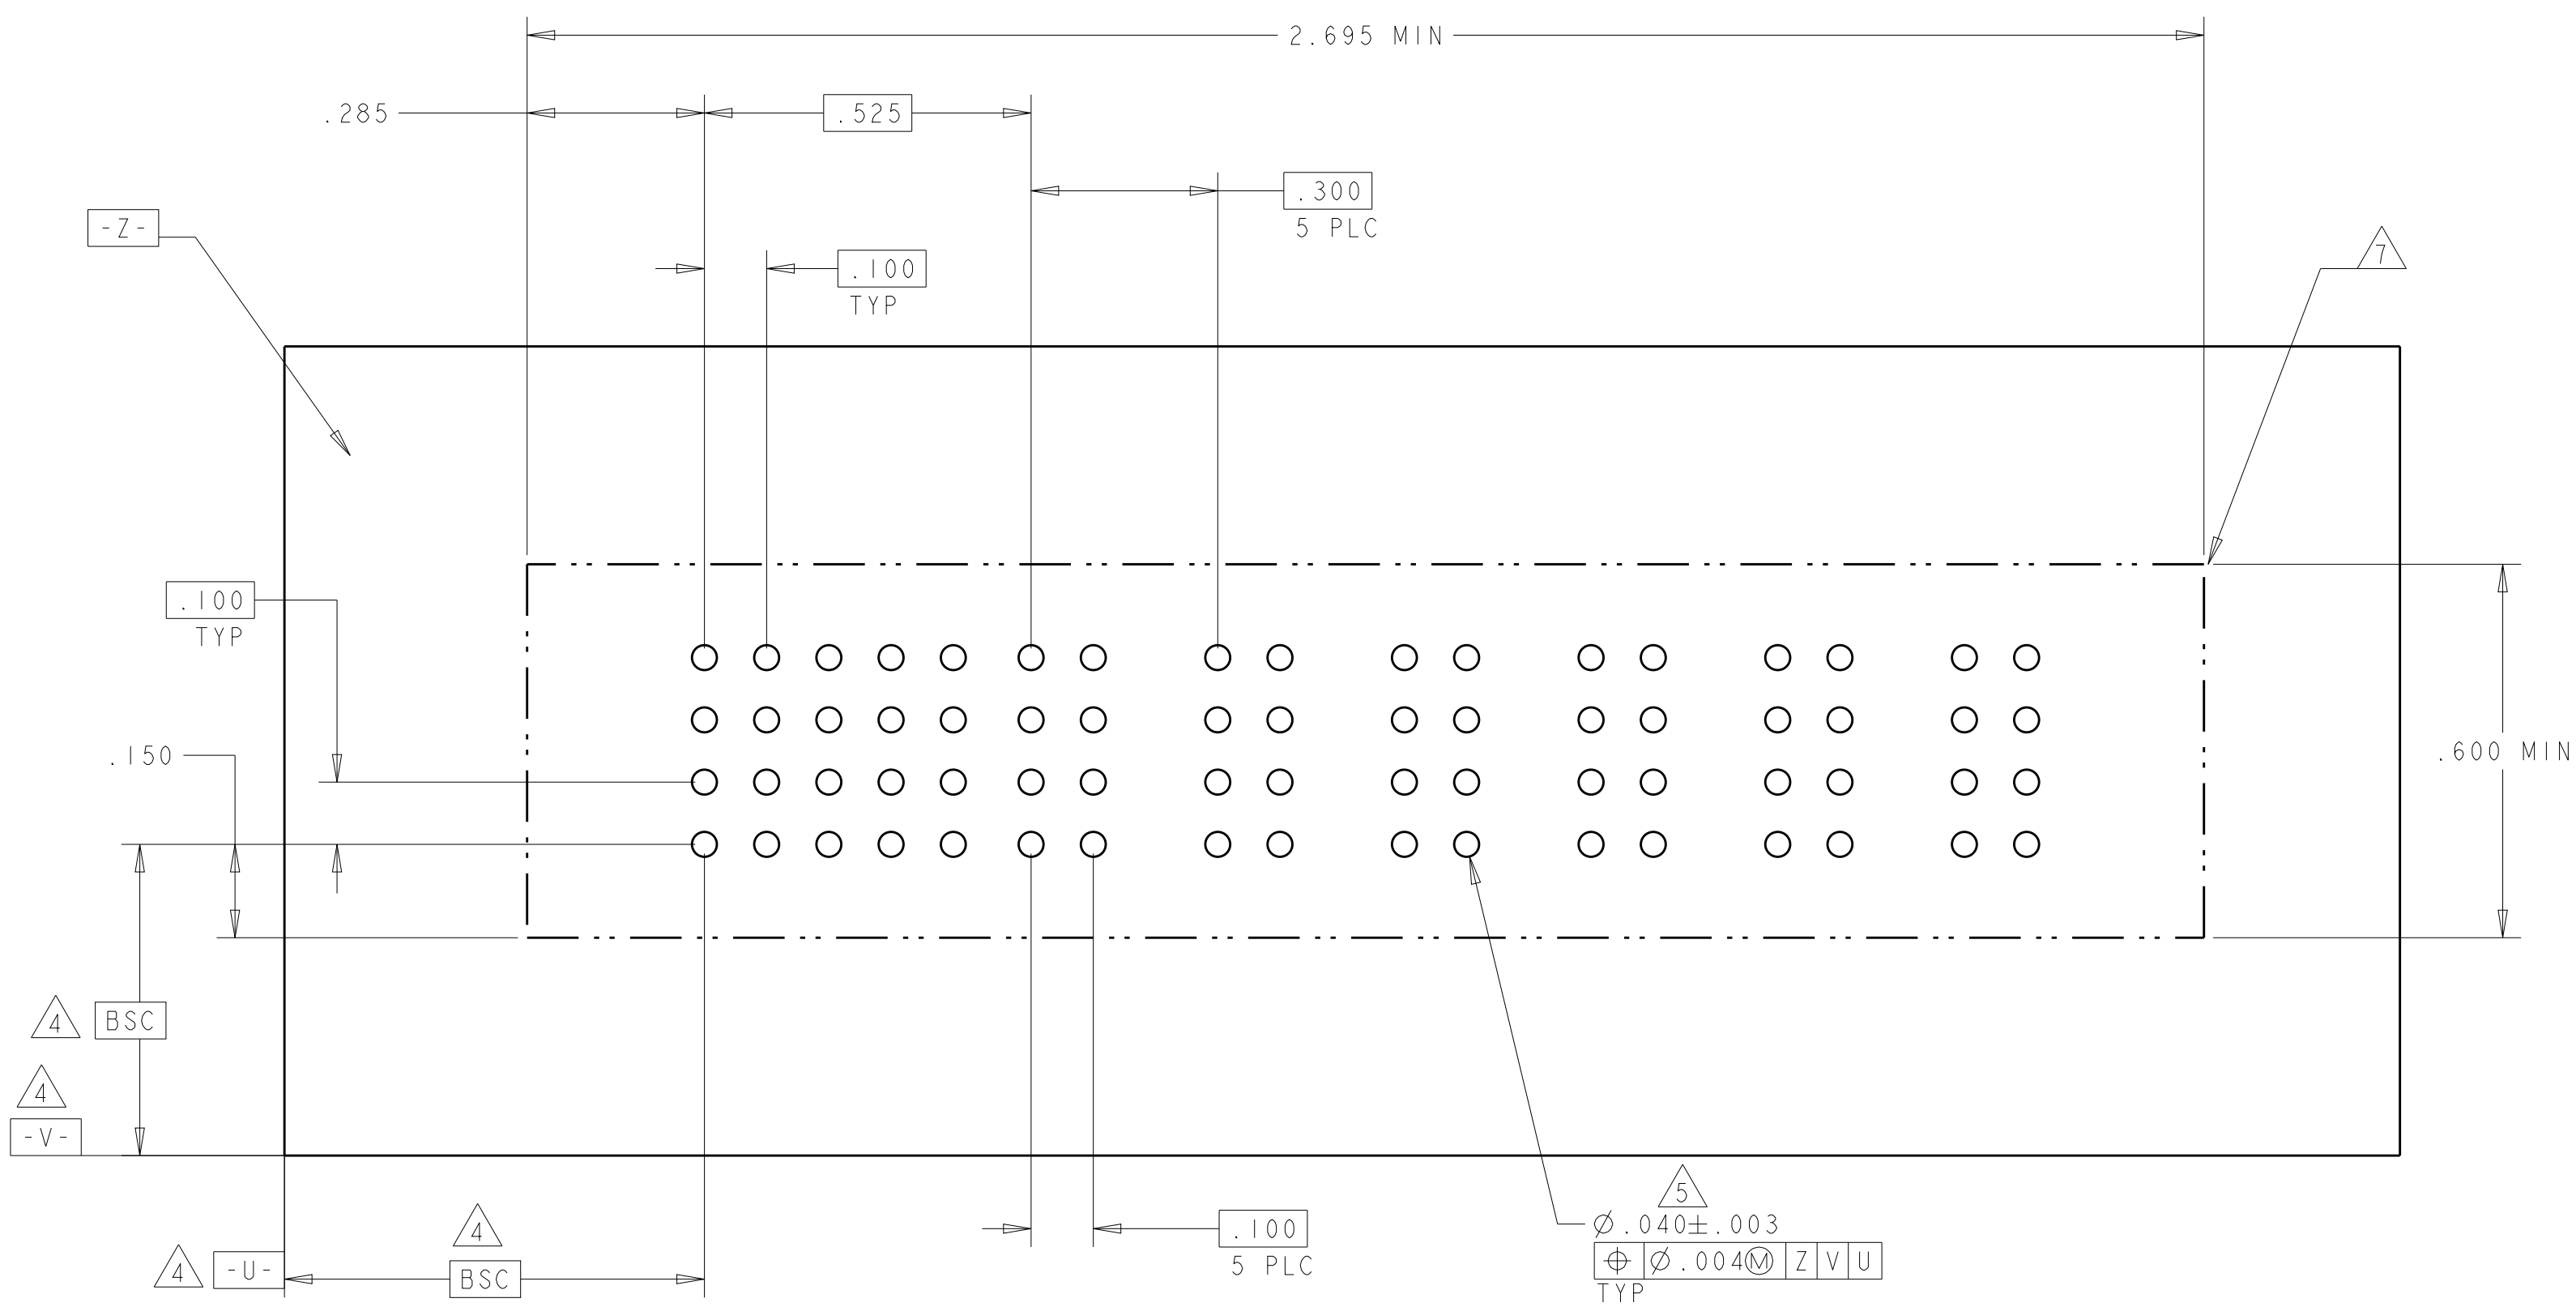


.165"	LOW POWER CONTACT	MFBLL	LZF
.165"	LOW POWER CONTACT		LZ
.165"	SIGNAL CONTACT	MFBLL	EF
-	HOLD DOWN		HD
.165"	SIGNAL CONTACT	MLBF	ES
.165"	SIGNAL CONTACT	STD	EV
.165"	POWER CONTACT		VM
TAIL LENGTH	DESCRIPTION		CODE




4805 (3/11)


PART NUMBER	ROWS		POWER						SIGNAL					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	
1-6450820-5	D C B A													
6P + 20S														

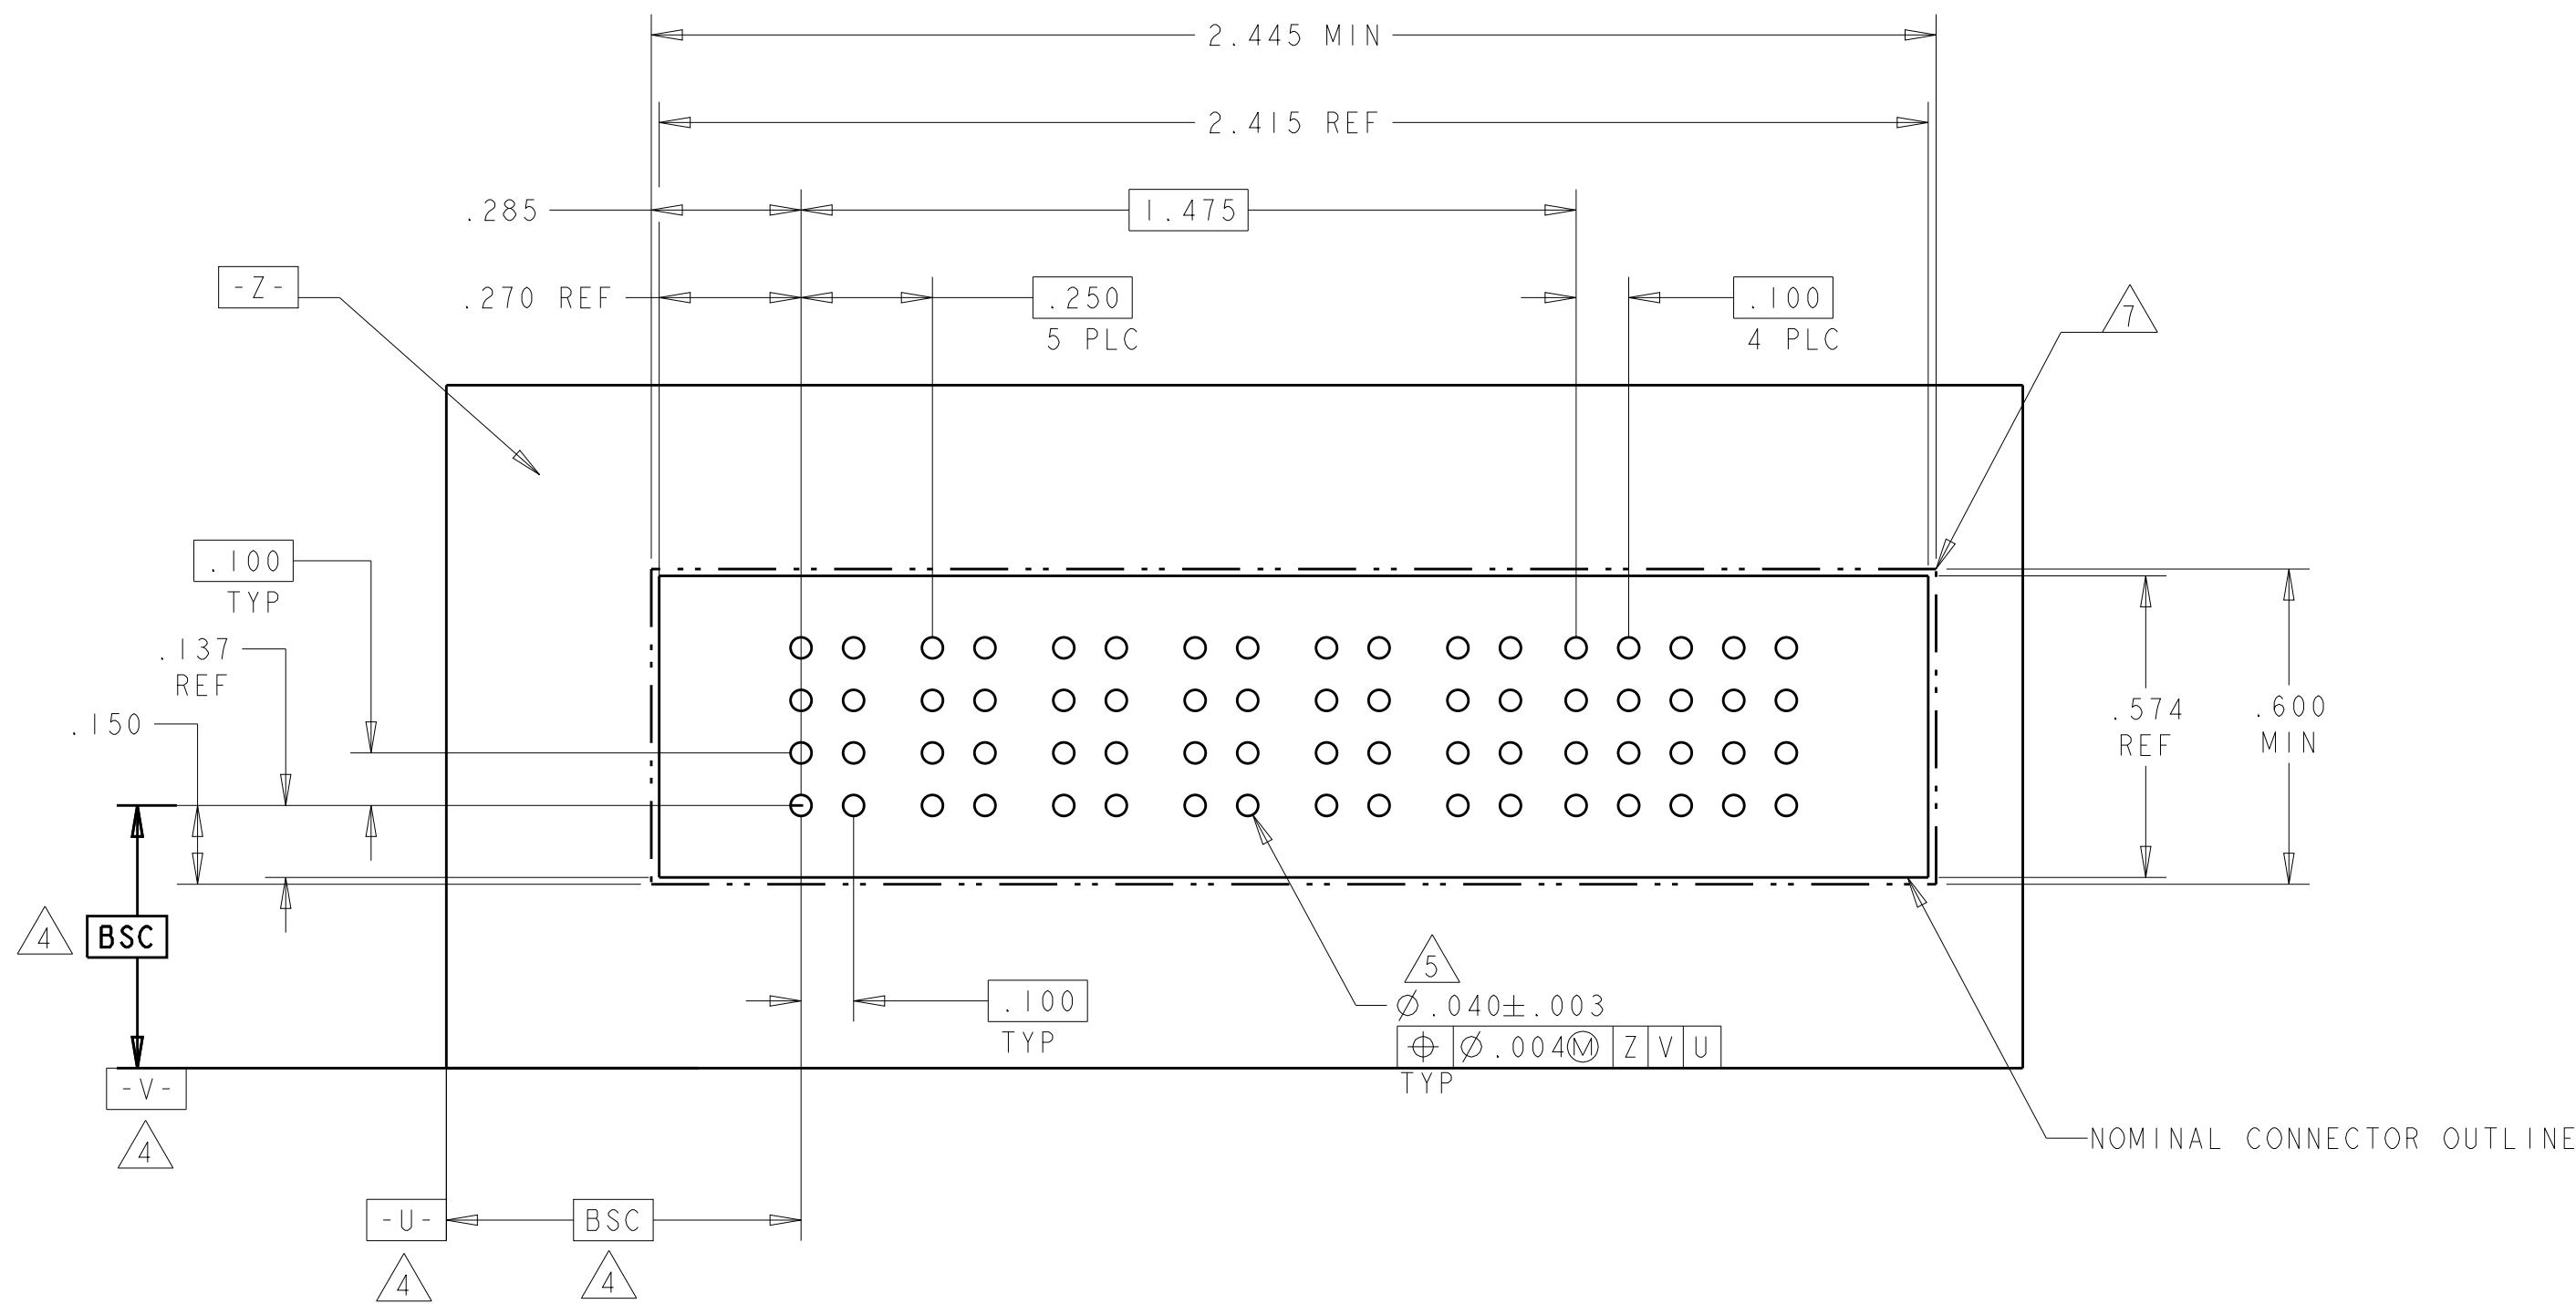4805 (3/11)

PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	1	2	P7	P8	P9	P10	P11	P12	
6450820-4	D C B A		VM	VM	VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	VM	VM	HD
									EV	EV							
									EV	EV							
									EV	EV							
6P + 8S + 6P																	

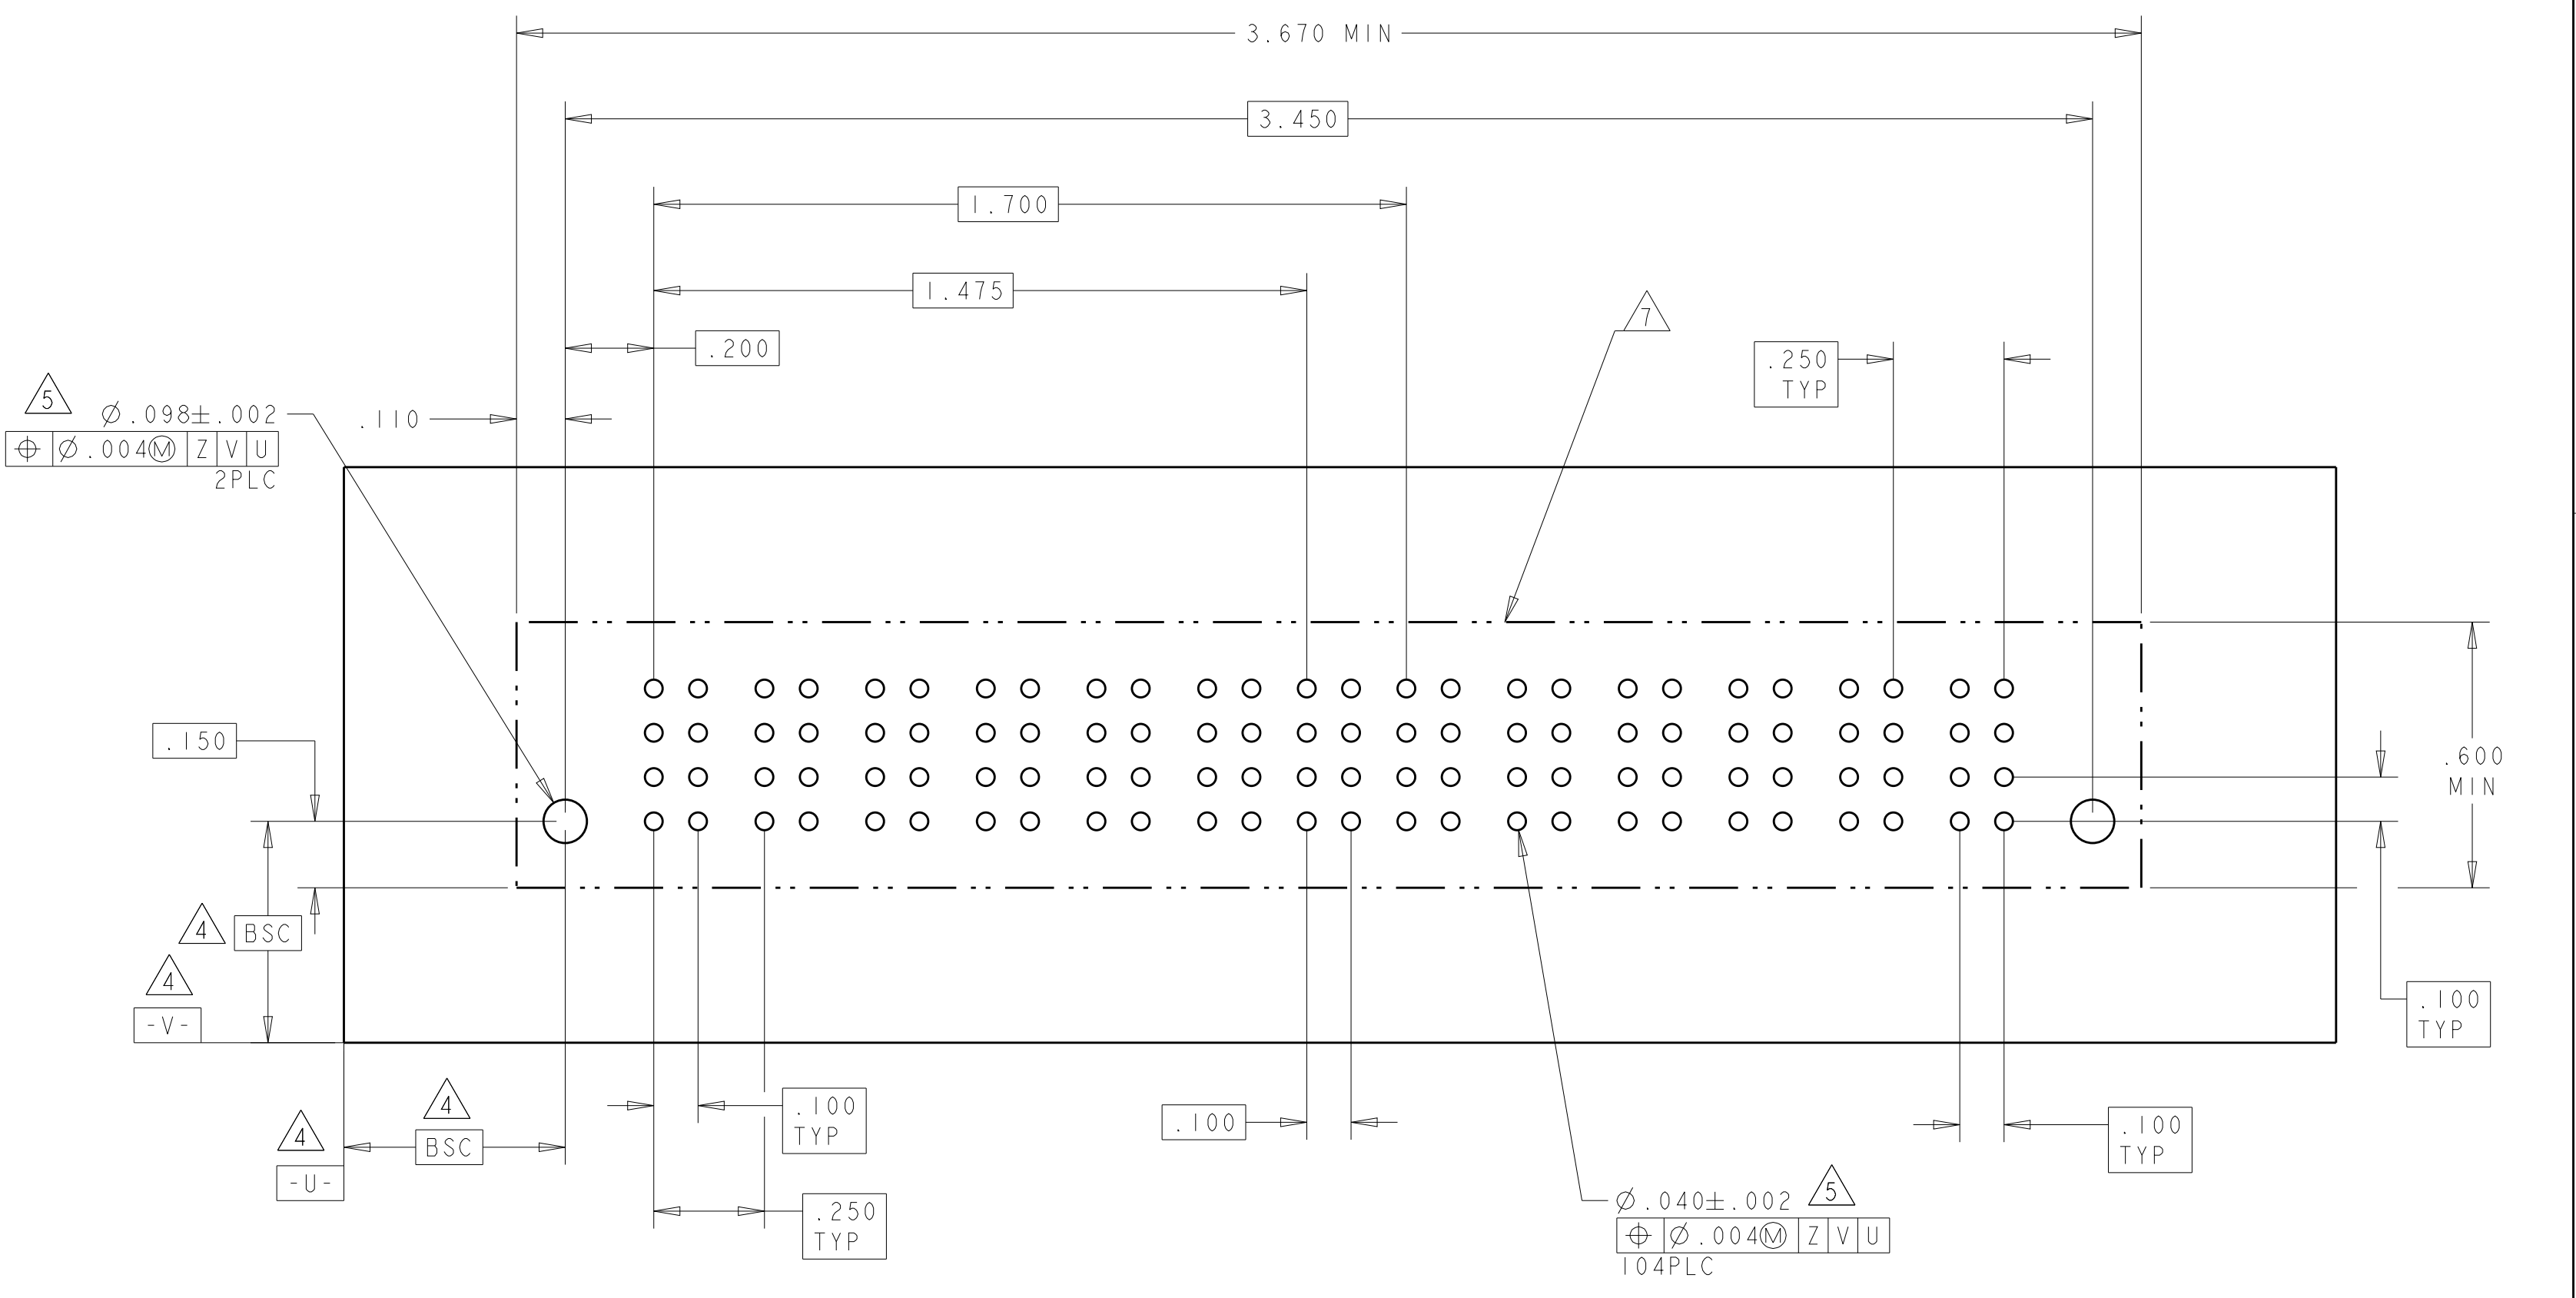4805 (3/11)

PART NUMBER	ROWS		POWER				SIGNAL		POWER						
			P1	P2	P3	P4	1	2	P5	P6	P7	P8			
6450820-5	D C B A					EV	EV								
						EV	EV					VM	VM	VM	VM
						EV	EV								
						EV	EV								
4P + 8S + 4P															

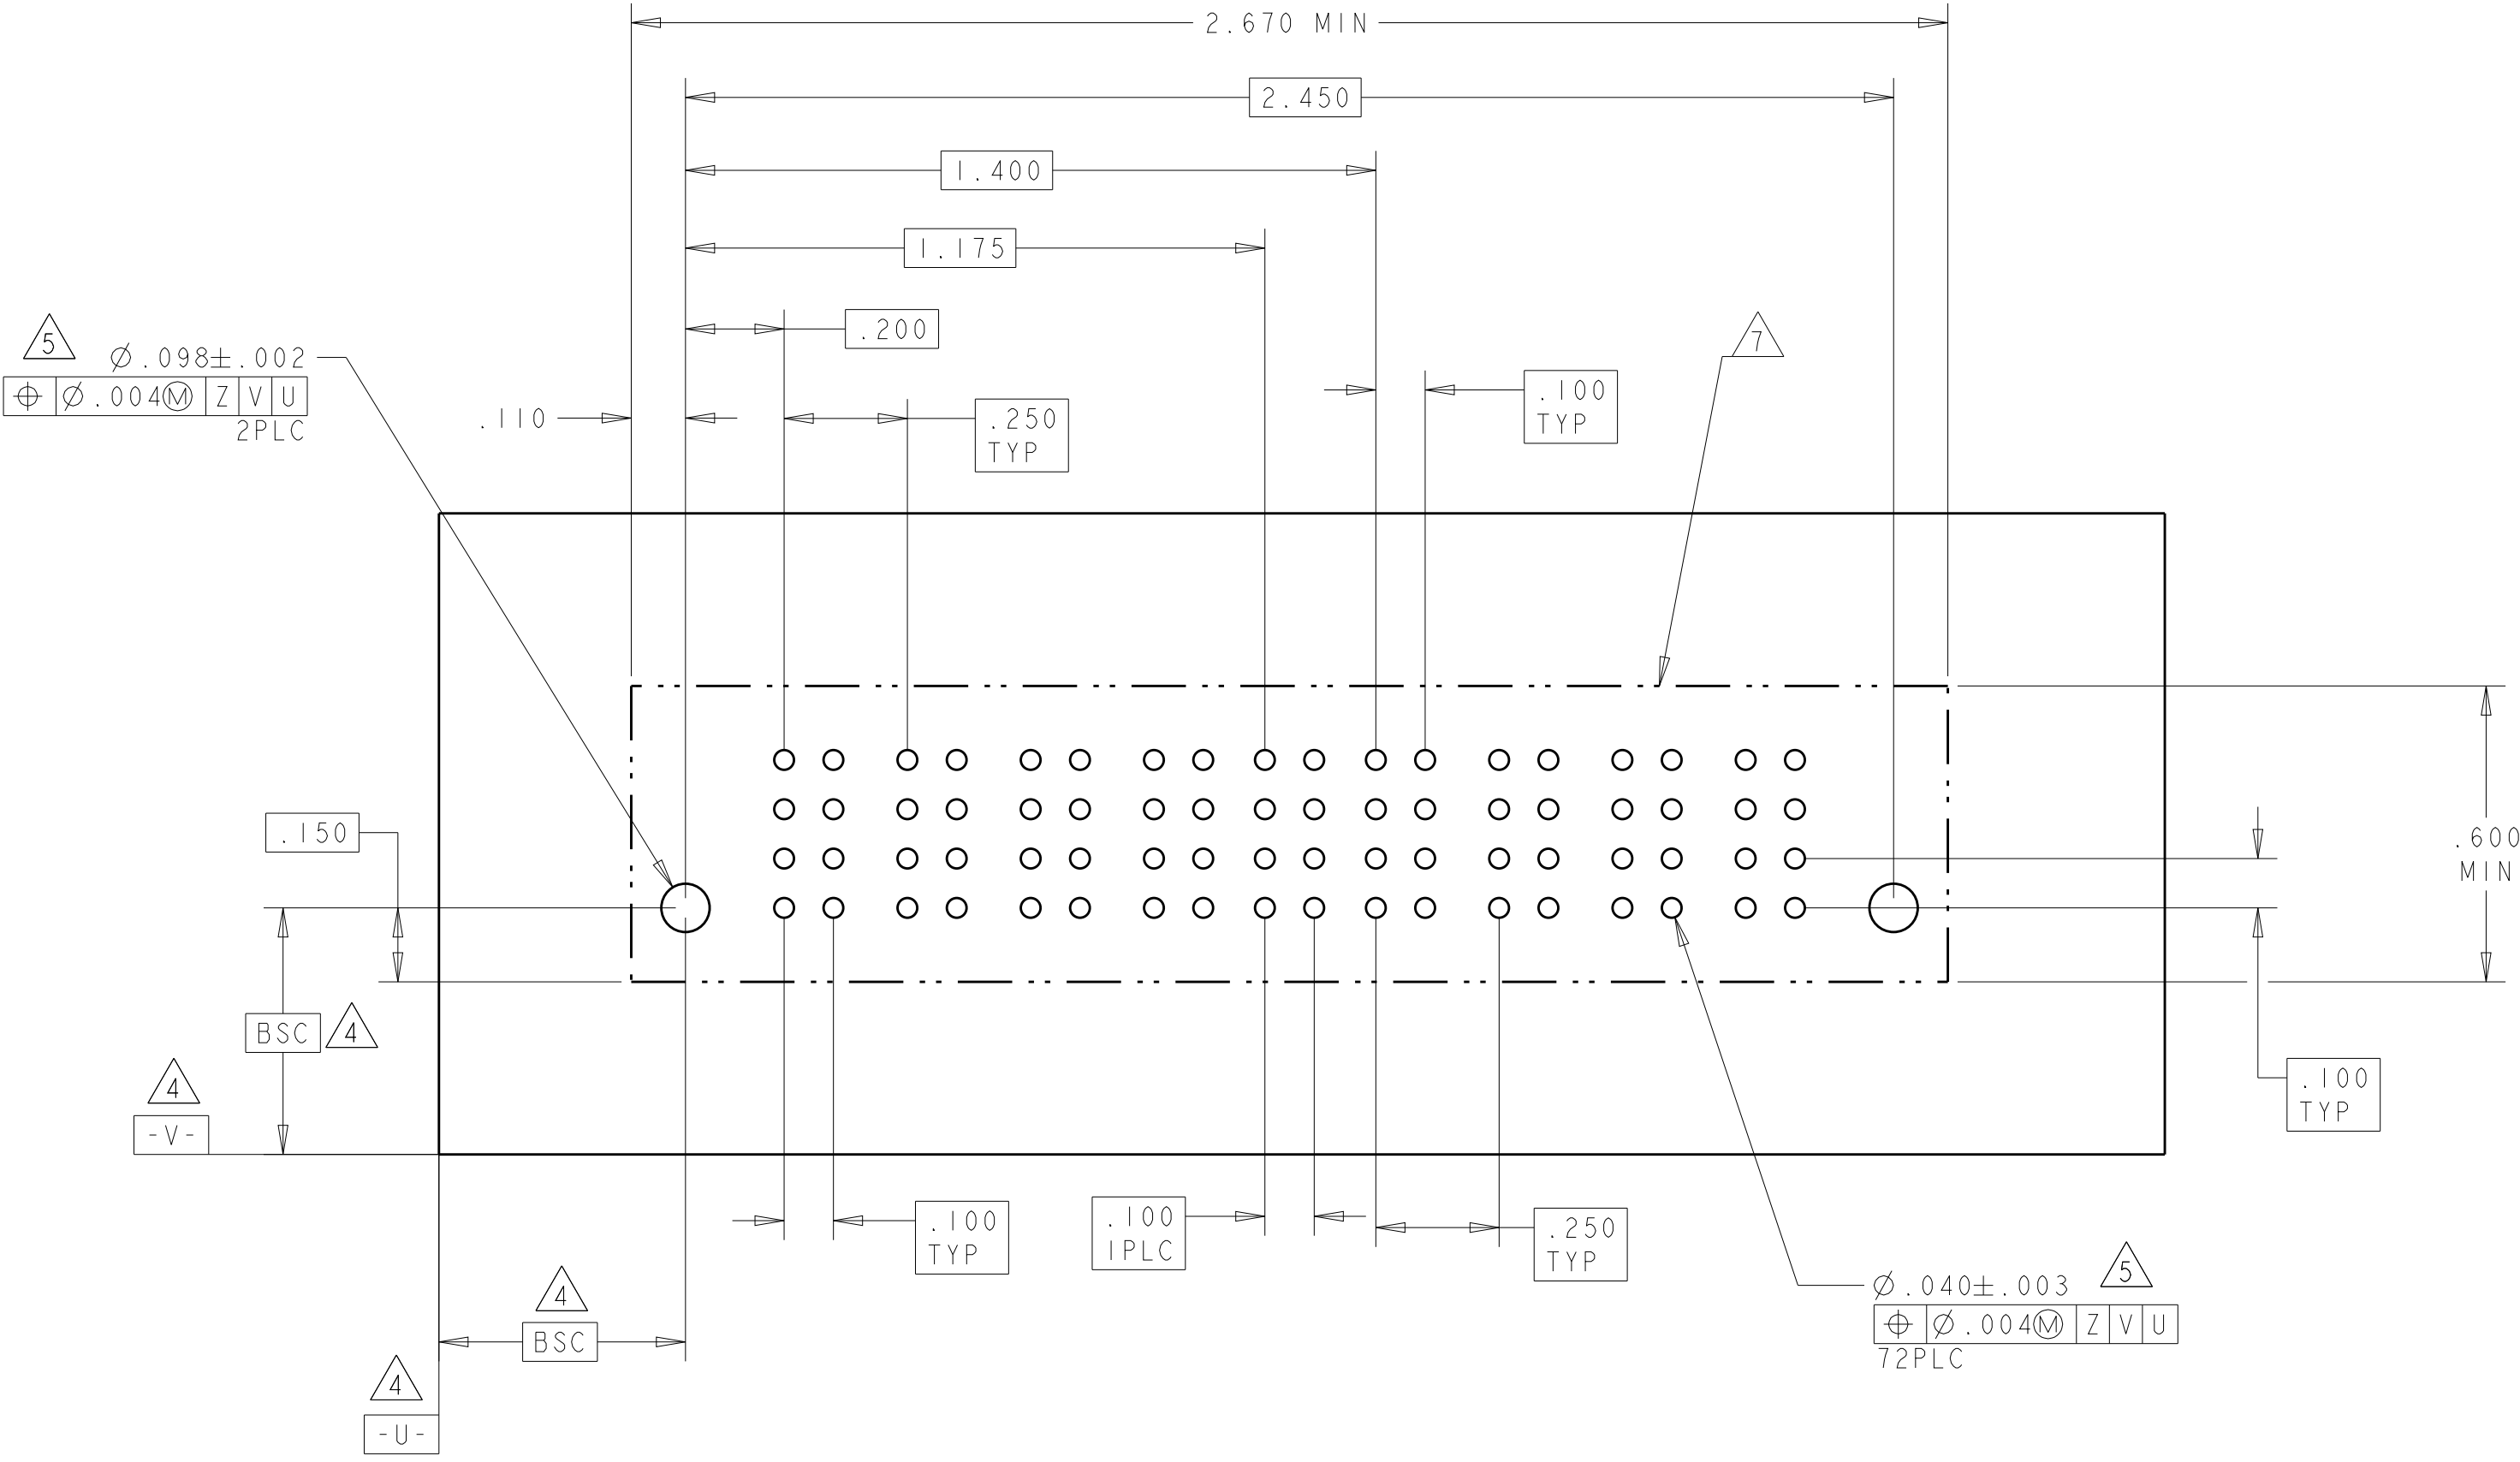


THIS DRAWING IS A CONTROLLED DOCUMENT		DWN D_ZHU	15NOV2007	 TE Connectivity			
		CHK S_ZHAO	15NOV2007				
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APP'D S_ZHAO	-	NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE			
INCHES		PRODUCT SPEC					
	0.125 P.LC ±.1	108-2232					
	0.125 P.LC ±.1	APPLICATION SPEC					
	0.005 P.LC ±.005	114-13251		SIZE	CASE CODE	DRAWING NO.	RESTRICTED TO
	0.0020 P.LC ±.0020	WEIGHT		A1	100779	C=6450820	-
MATERIAL	FINISH			Customer Drawing		SCALE	SHEET 8 OF 20
-	-						REV 68


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER													SIGNAL				POWER	SIGNAL									
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10										
6450820-6	D C B A		VM		EV	EV	EV	EV		VM	VM		VM	EV	VM		VM	VM		EV	EV	EV	EV		EV	ES										
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV	EV	EV	EV	EV	EV	EV
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV	EV	EV	EV	EV	EV	EV
					ES	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV	EV	EV	EV	EV	EV	EV
					2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																															

NO CONTACTS LOADED

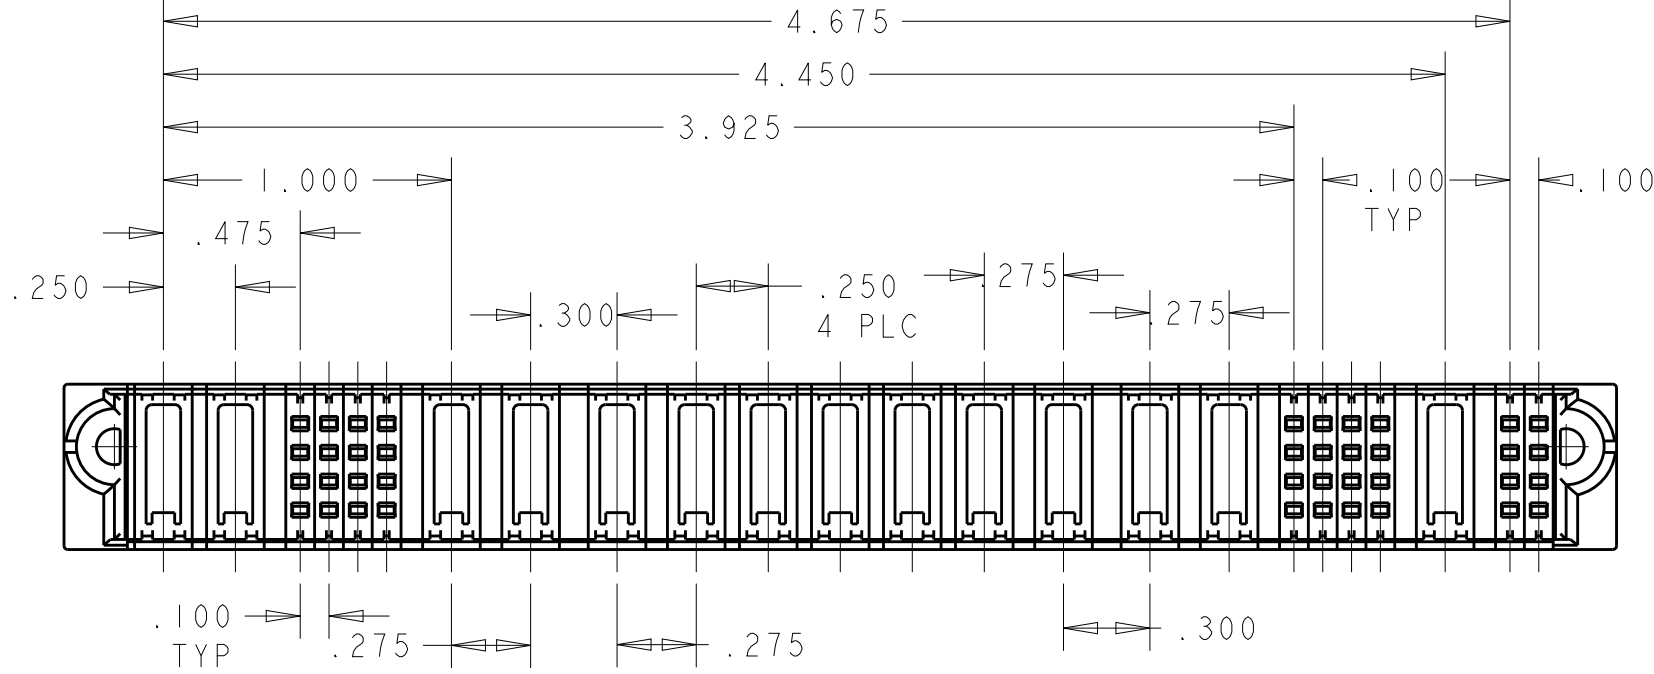

SCALE 3:2
6450820-6

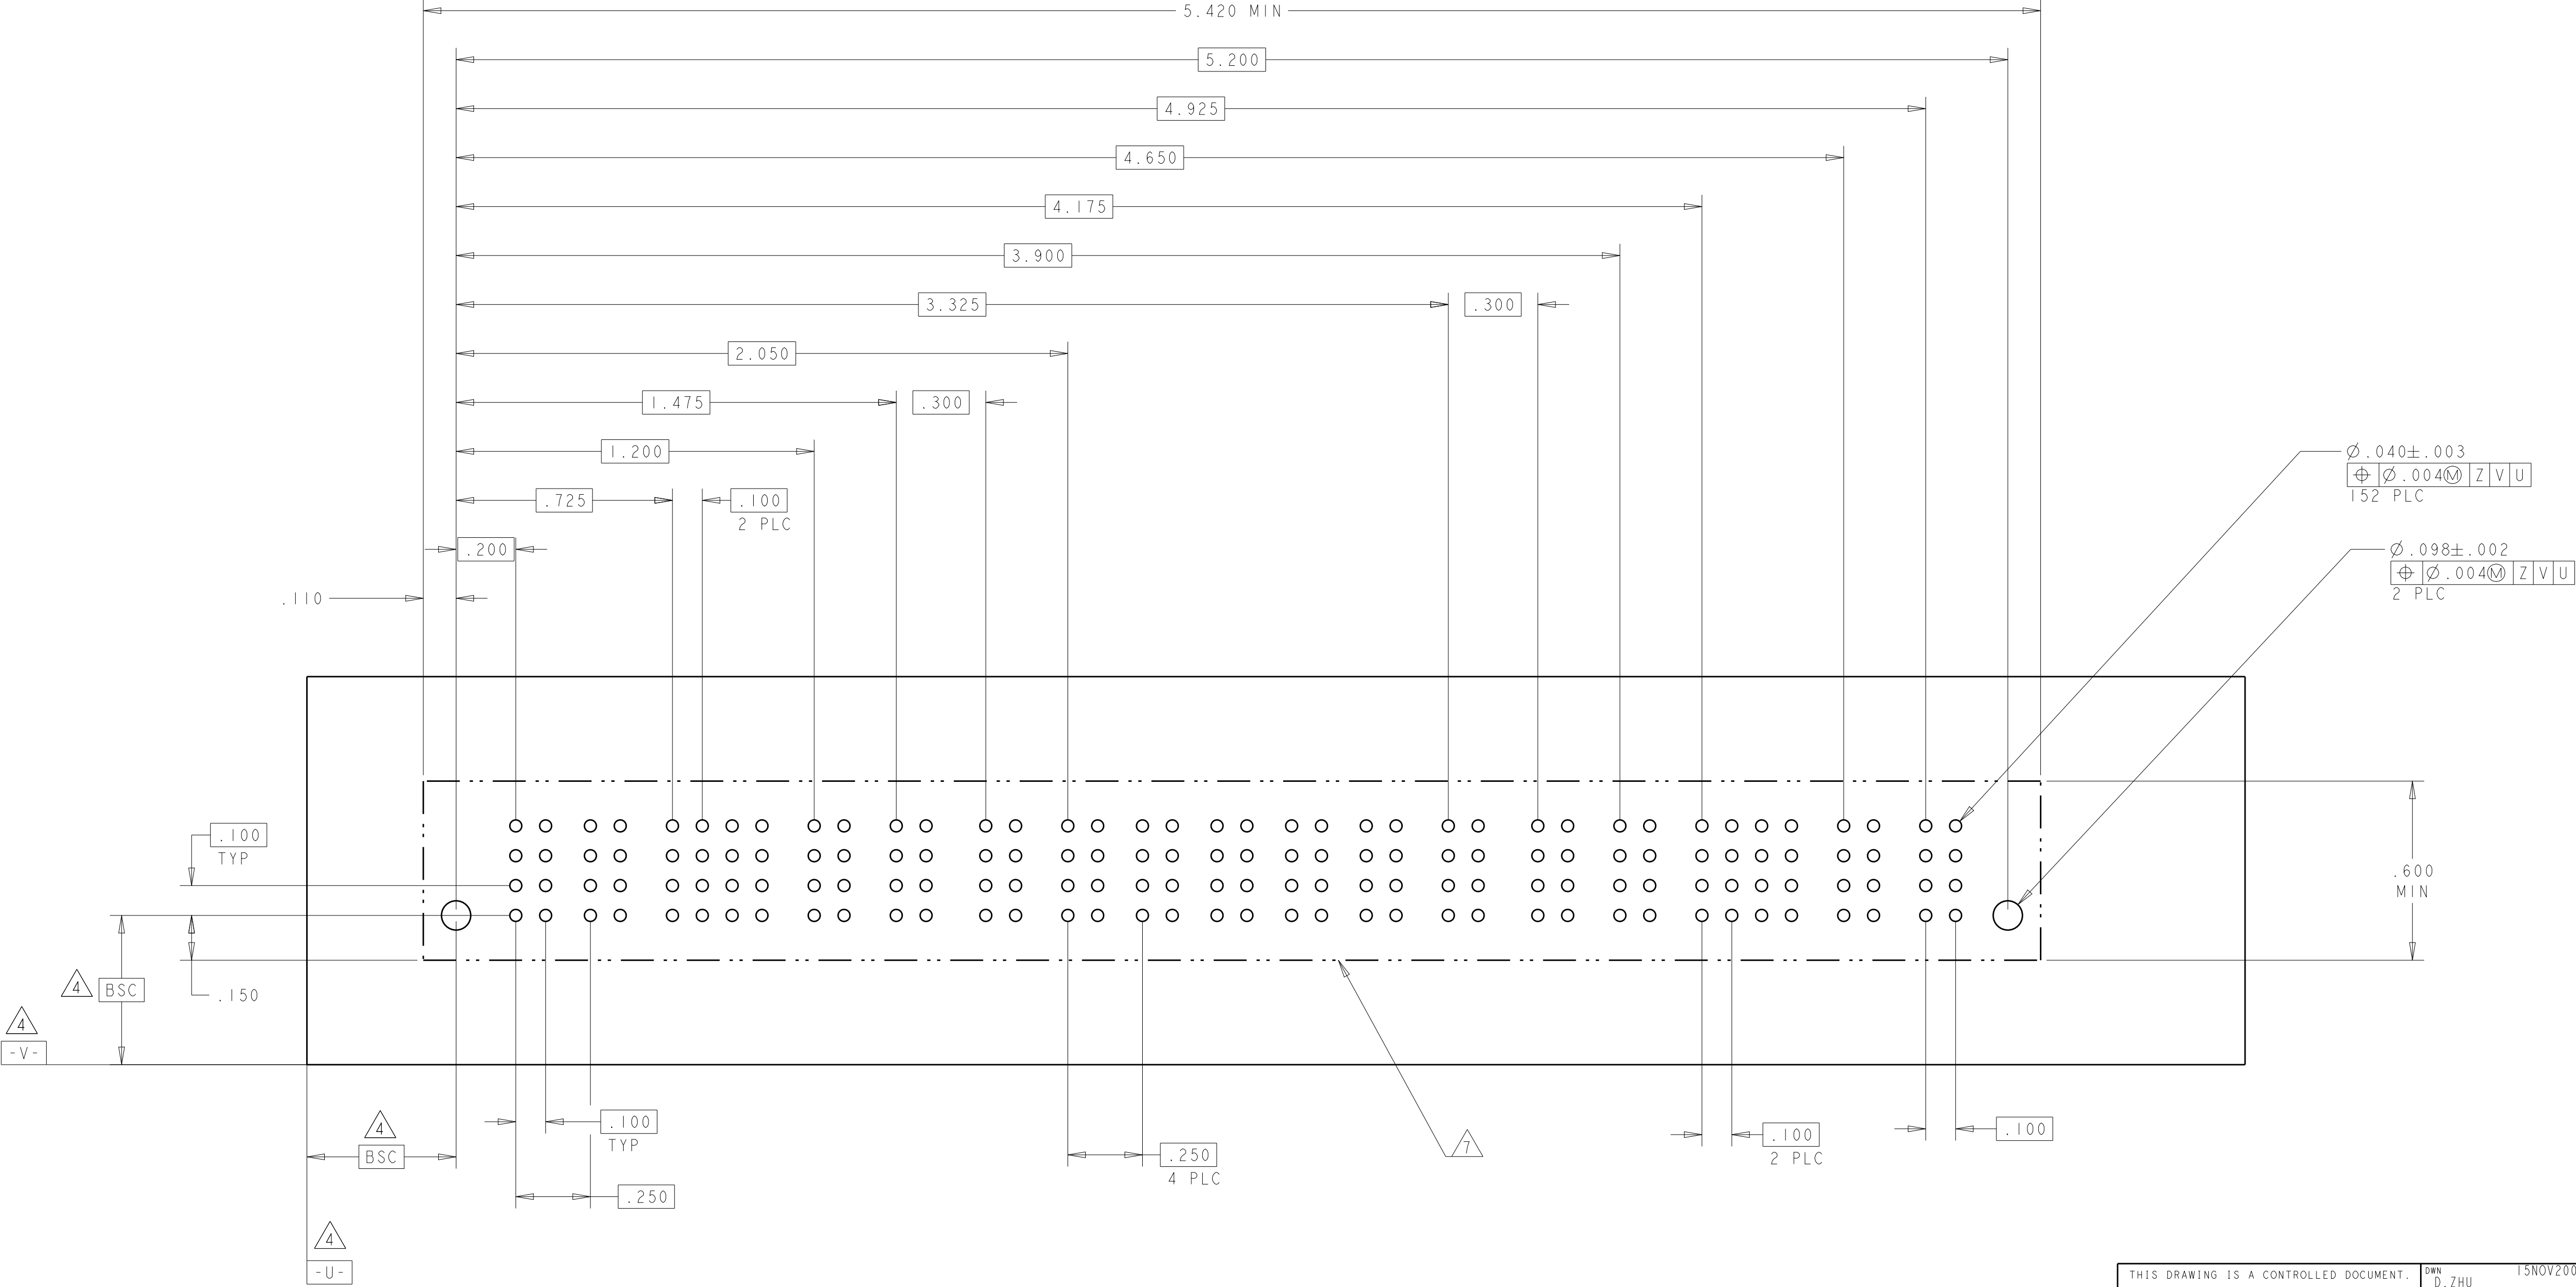

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	 TE Connectivity			
		CHK	S. ZHAO	15NOV2007				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE			
INCHES								
	0 PLC	±0.1	PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251		SIZE	CASE CODE	DRAWING NO A100779C-6450820	RESTRICTED TO -
	0 PLC	±0.1						
	0 PLC	±0.005						
	4 PLC	±0.0020						
	ANGLES	±2°						
FINISH		WEIGHT						
MATERIAL		Customer Drawing			SCALE - SHEET 9 of 20 REV G8			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER										SIGNAL				POWER	SIGNAL						
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10				
6450820-7	D C B A		VM		EV	EV	EV	EV		VM	VM		VM		VM		VM	VM		EV	EV	EV	EV		EV	ES				
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EF	
					EF	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV
					ES	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																														


THE PCB LAYOUT IS THE SAME AS 6450820-6.
PLEASE SEE 6450820-6 FOR DETAIL DIM.

NO CONTACTS LOADED


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	 TE Connectivity			
		CHK	S. ZHAO	15NOV2007				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD	S. ZHAO	-	NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE
INCHES		0 PLC ±"			PRODUCT SPEC			
		1 PLC ±.01			108-2292			
		3 PLC ±.005			APPLICATION SPEC			
		4 PLC ±.0020			114-13251			
ANGLES		FINISH			WEIGHT			
MATERIAL		-			-			RESTRICTED TO
					Customer Drawing			
SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		
A1		00779		6450820		-		
SHEET		10		OF		20		
						REV G8		

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL																		POWER								
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	P9	P10	P11	P12	P13	P14	P15	P16	
6450820-8	D C B A	HD	VM VM VM VM VM VM VM VM	EV EV	VM VM VM VM VM VM VM VM	HD																															
8P + 72S + 8P																																					

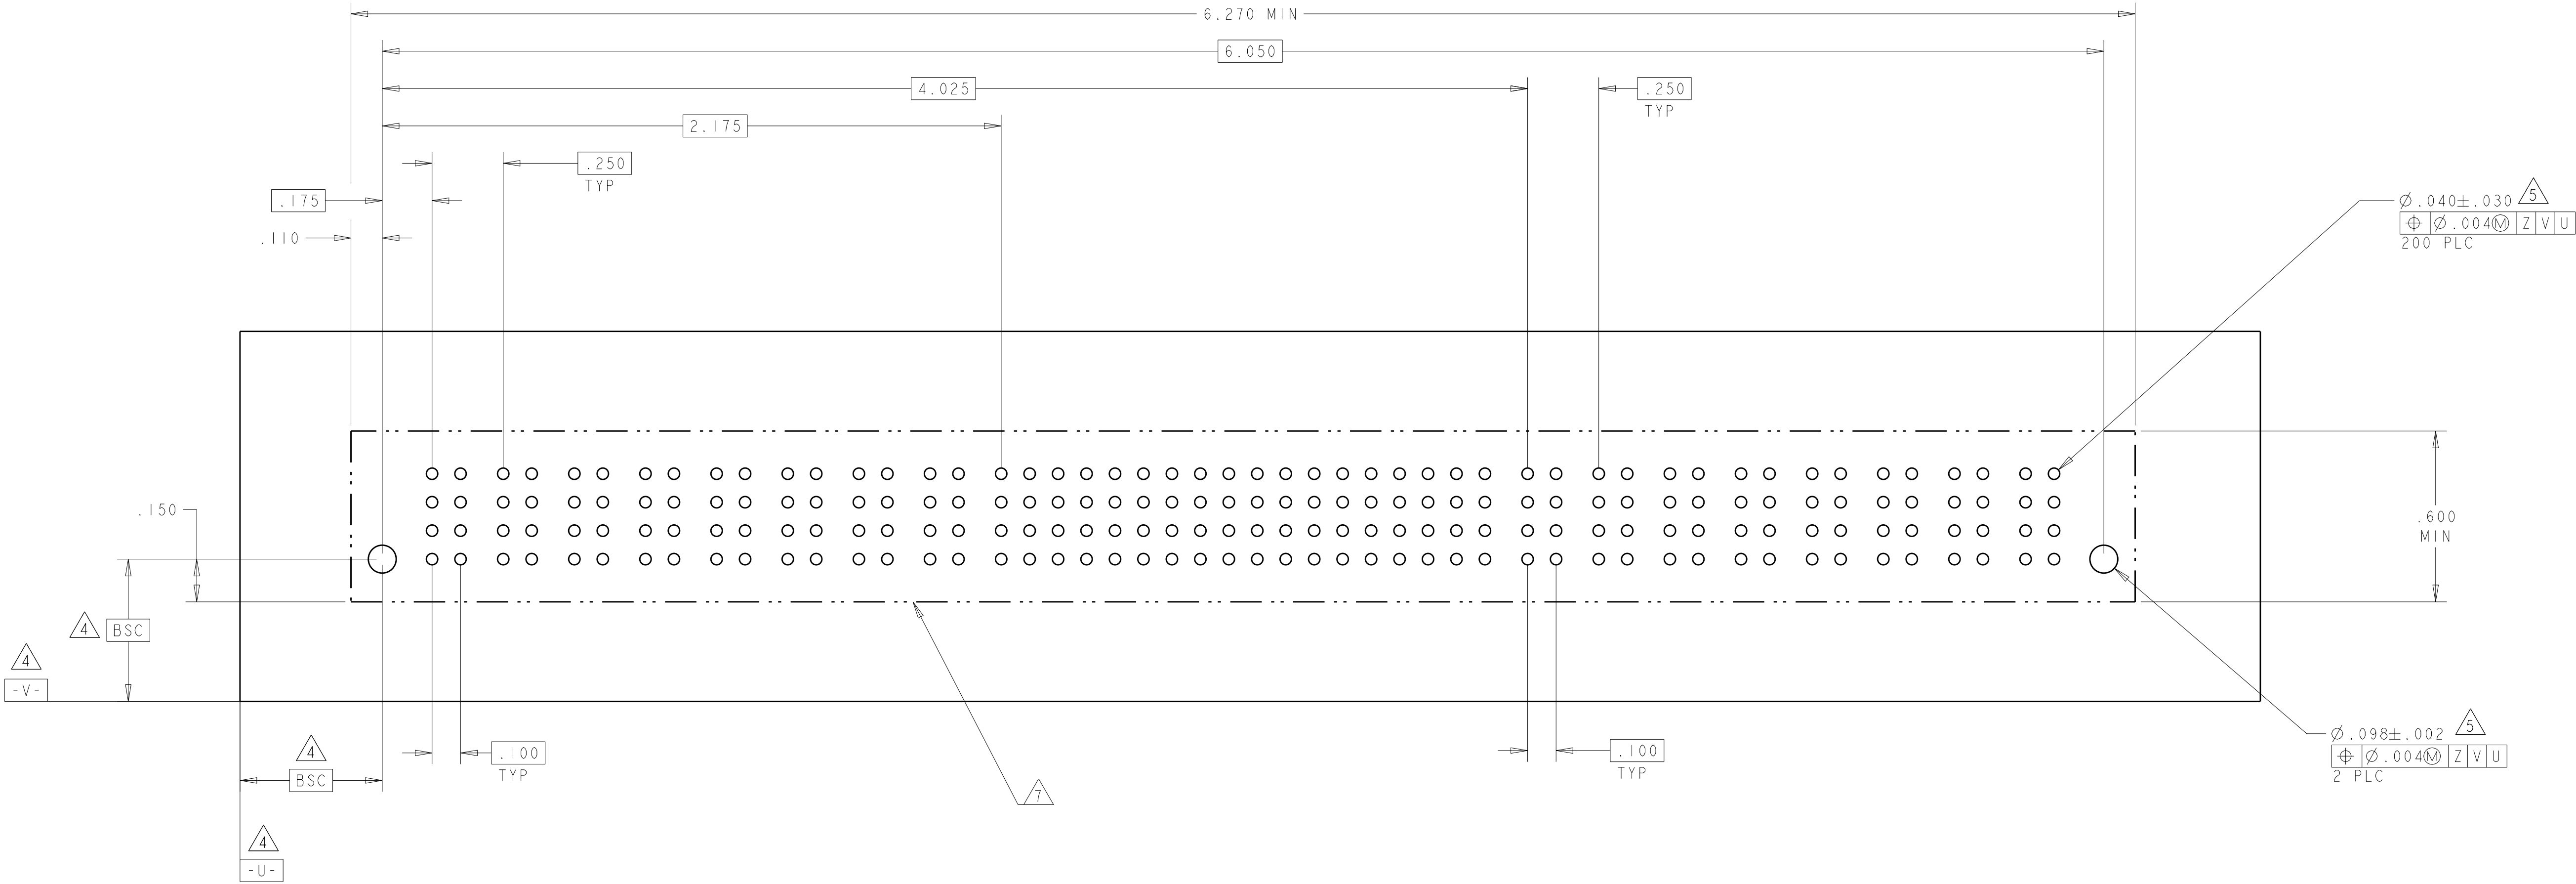


PART NUMBER	ROWS		POWER						SIGNAL						POWER							
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12		
I-6450820-1	D C B A																					
6P + 24S + 6P																						

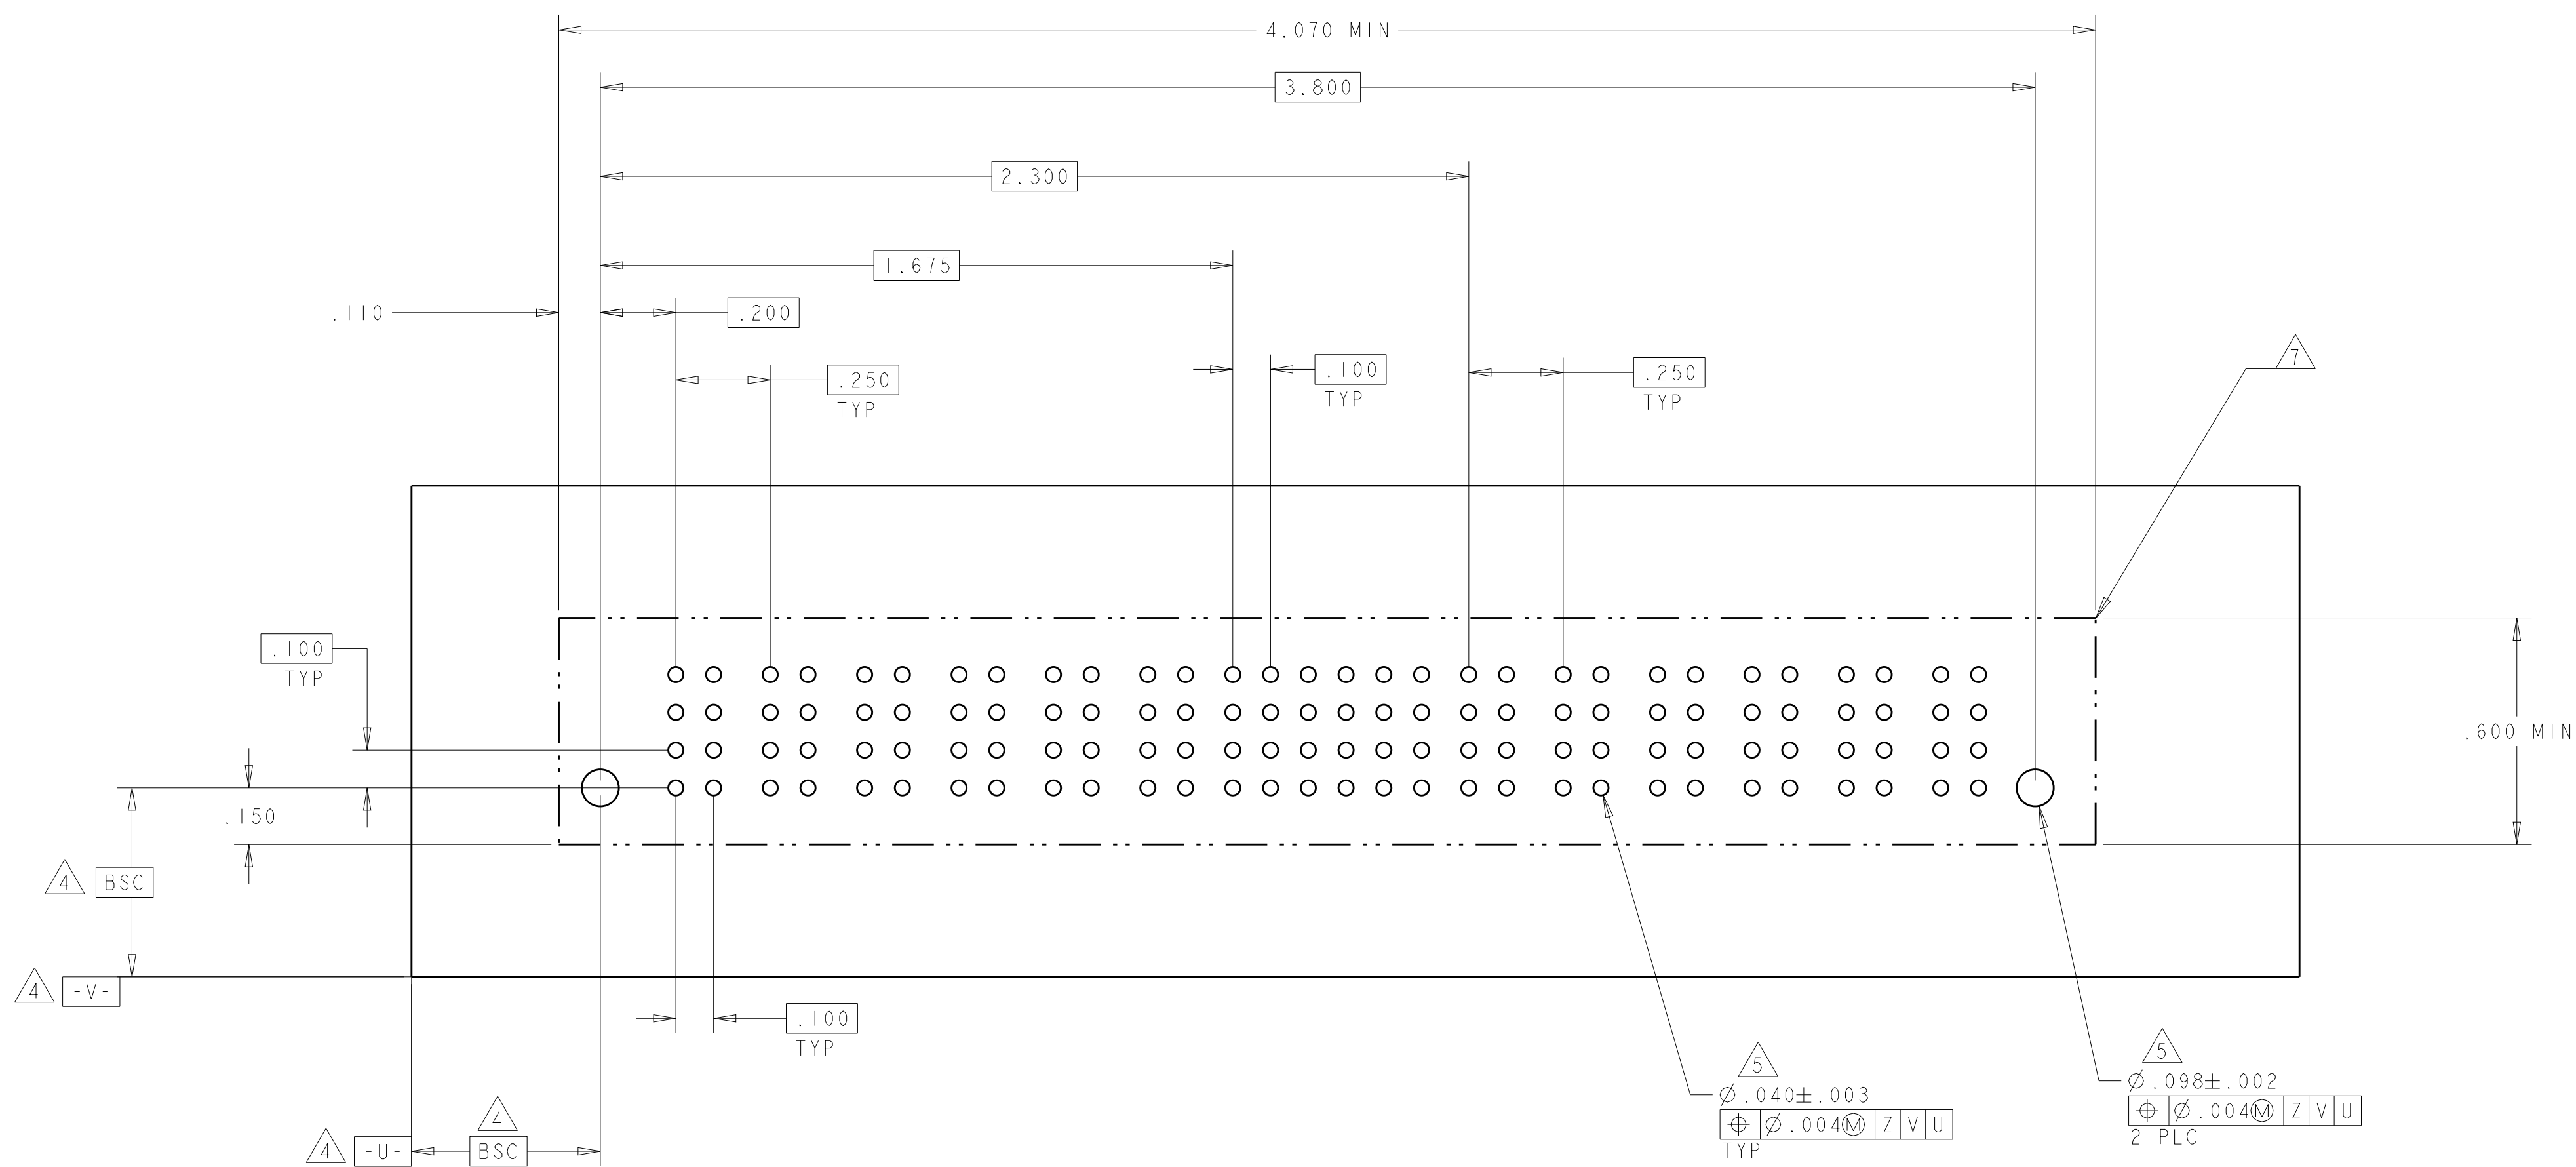

THIS DRAWING IS A CONTROLLED DOCUMENT.						DATE D. ZHU 15NOV2007				TE Connectivity			
						CHK S. ZHAO 15NOV2007							
DIMENSIONS: INCHES		TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:				APPROVED S. ZHAO -		NAME					
		PRODUCT SPEC				VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM LSS							
		108-2292											
		APPLICATION SPEC											
		114-13251											
		FINISH											
MATERIAL	-	-	-	-	-	WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
	-	-	-	-	-		A1	100779	C6450820		-		
Customer Drawing								SCALE	-	SHEET	12 OF 20	REV	G8

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
1-6450820-3	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3ACP + 24S + 3ACP															

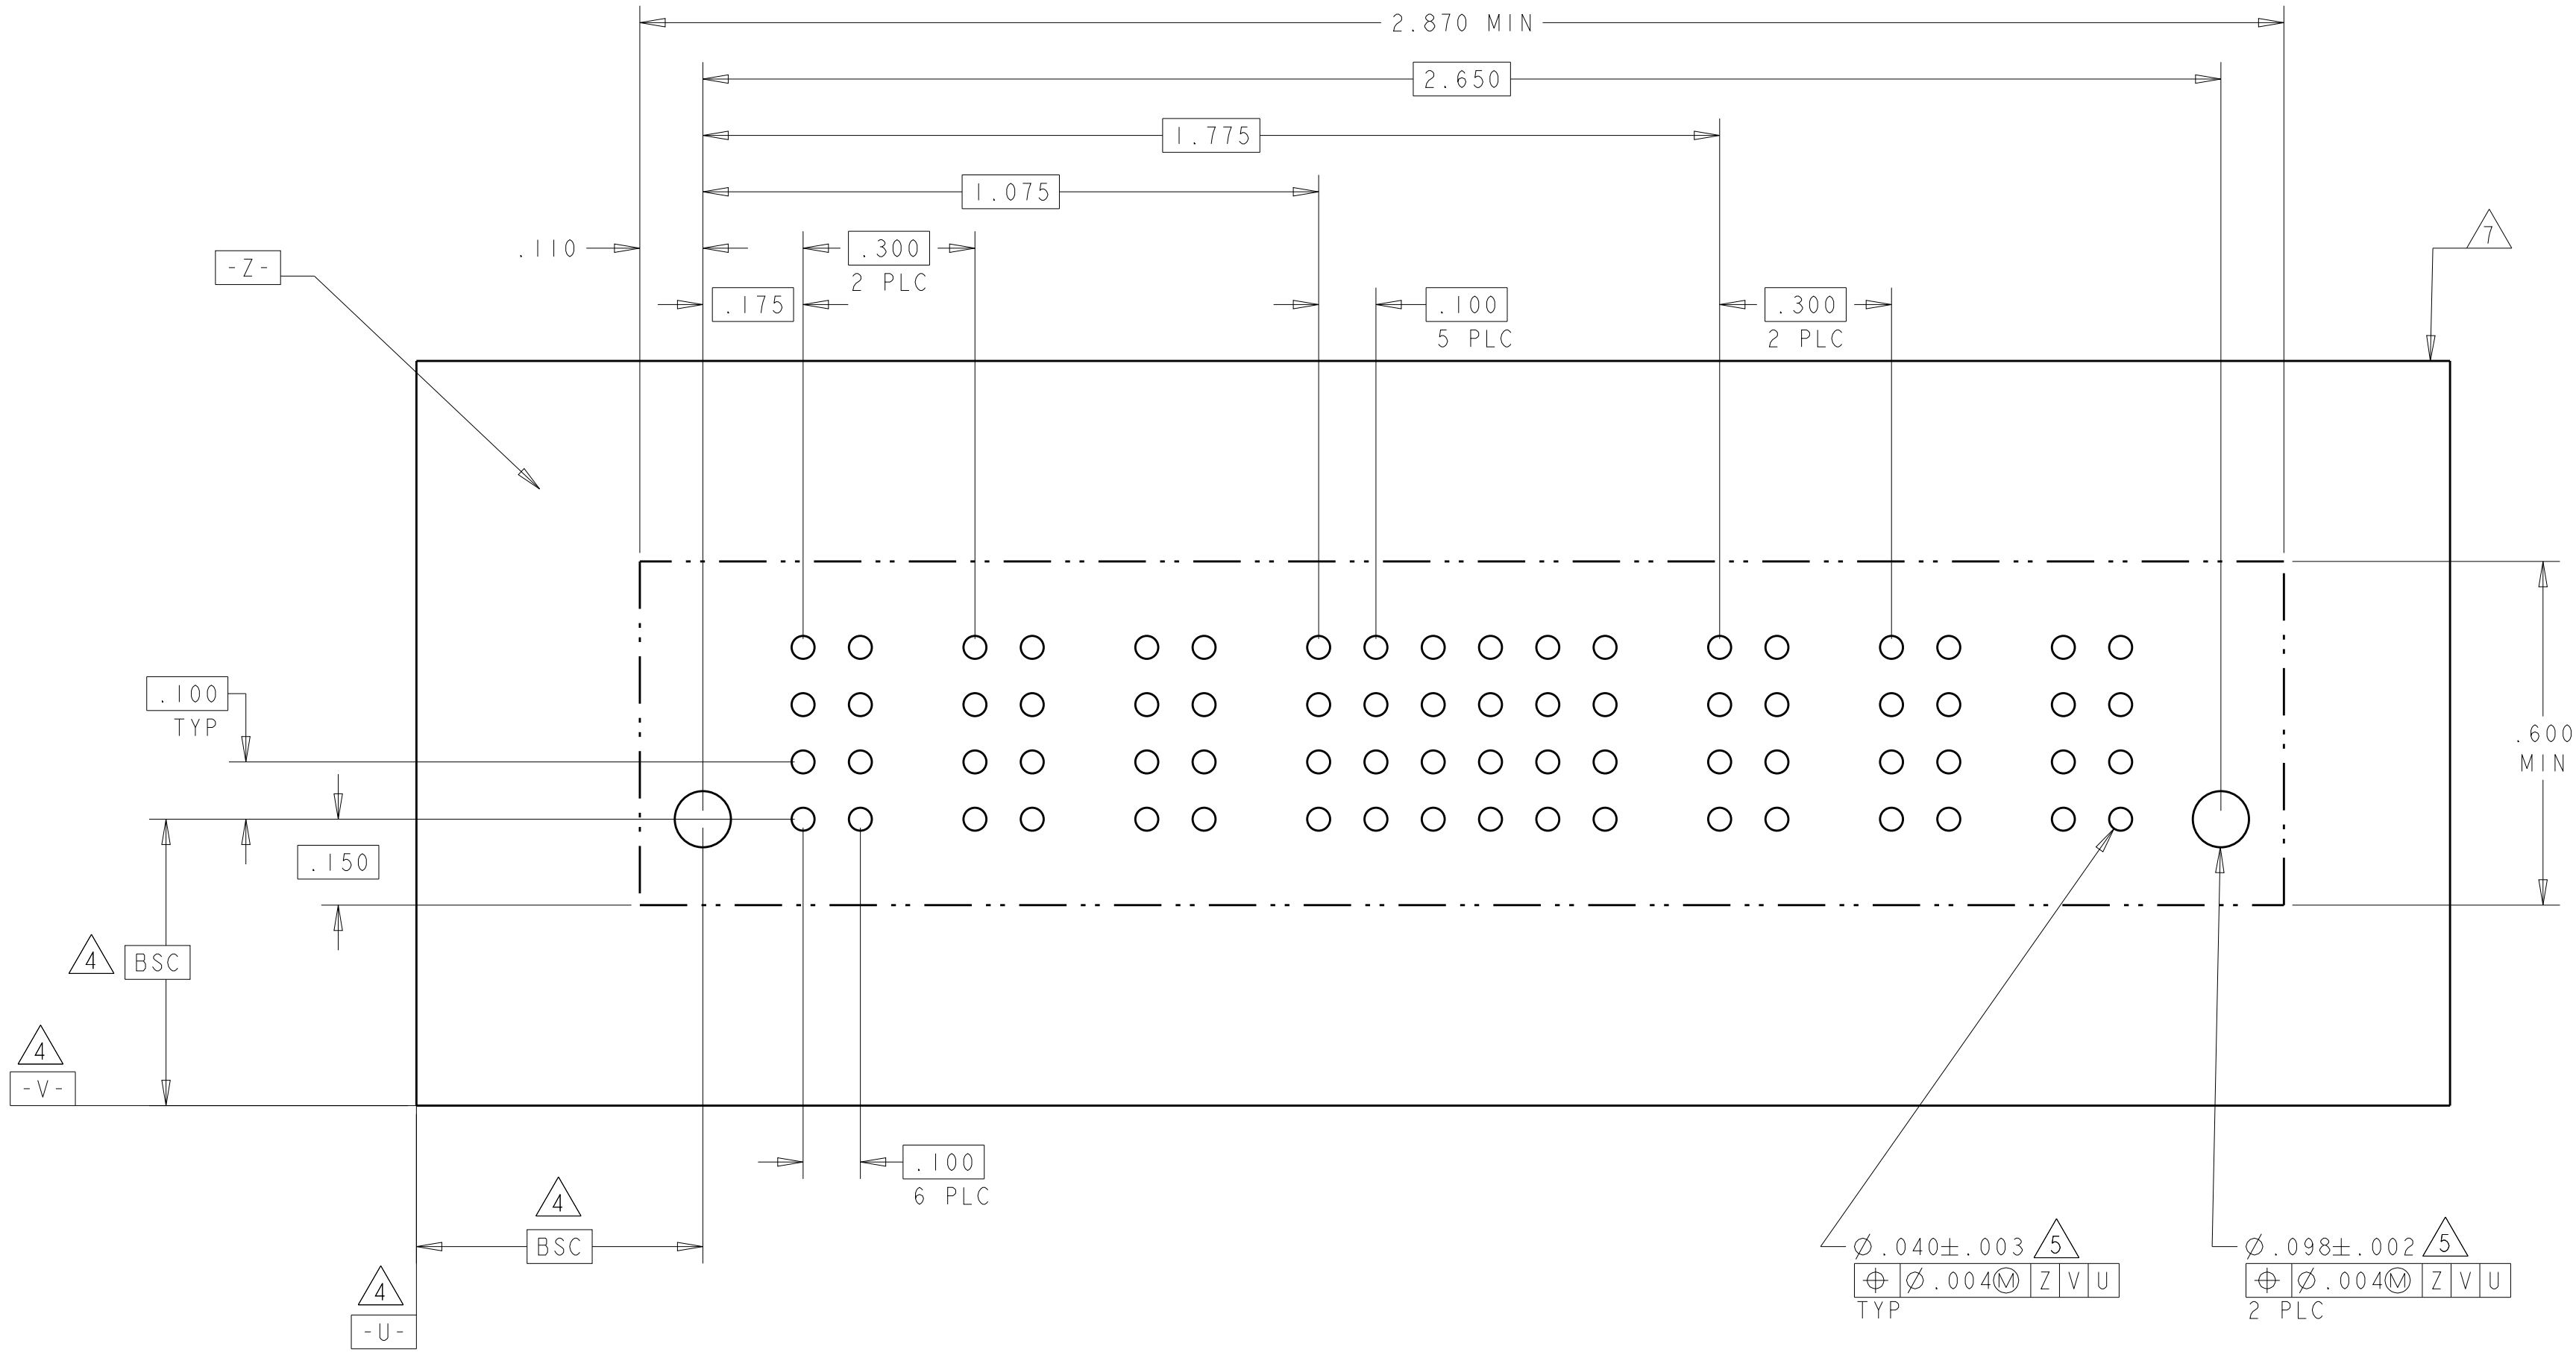

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

Customer Drawing

NAME

VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE

A1

CAGE CODE

100779

DRAWING NO

6450820

RESTRICTED TO

-

SCALE

-

SHEET

13

OF

20

REV


G8

TE

TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER												SIGNAL																							
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4	5	6	7	8	9	10	11	12												
I-6450820-7	D C B A																																					
			VM												EV																							
			VM												EV																							
			VM												EV																							
12P + 48S																																						

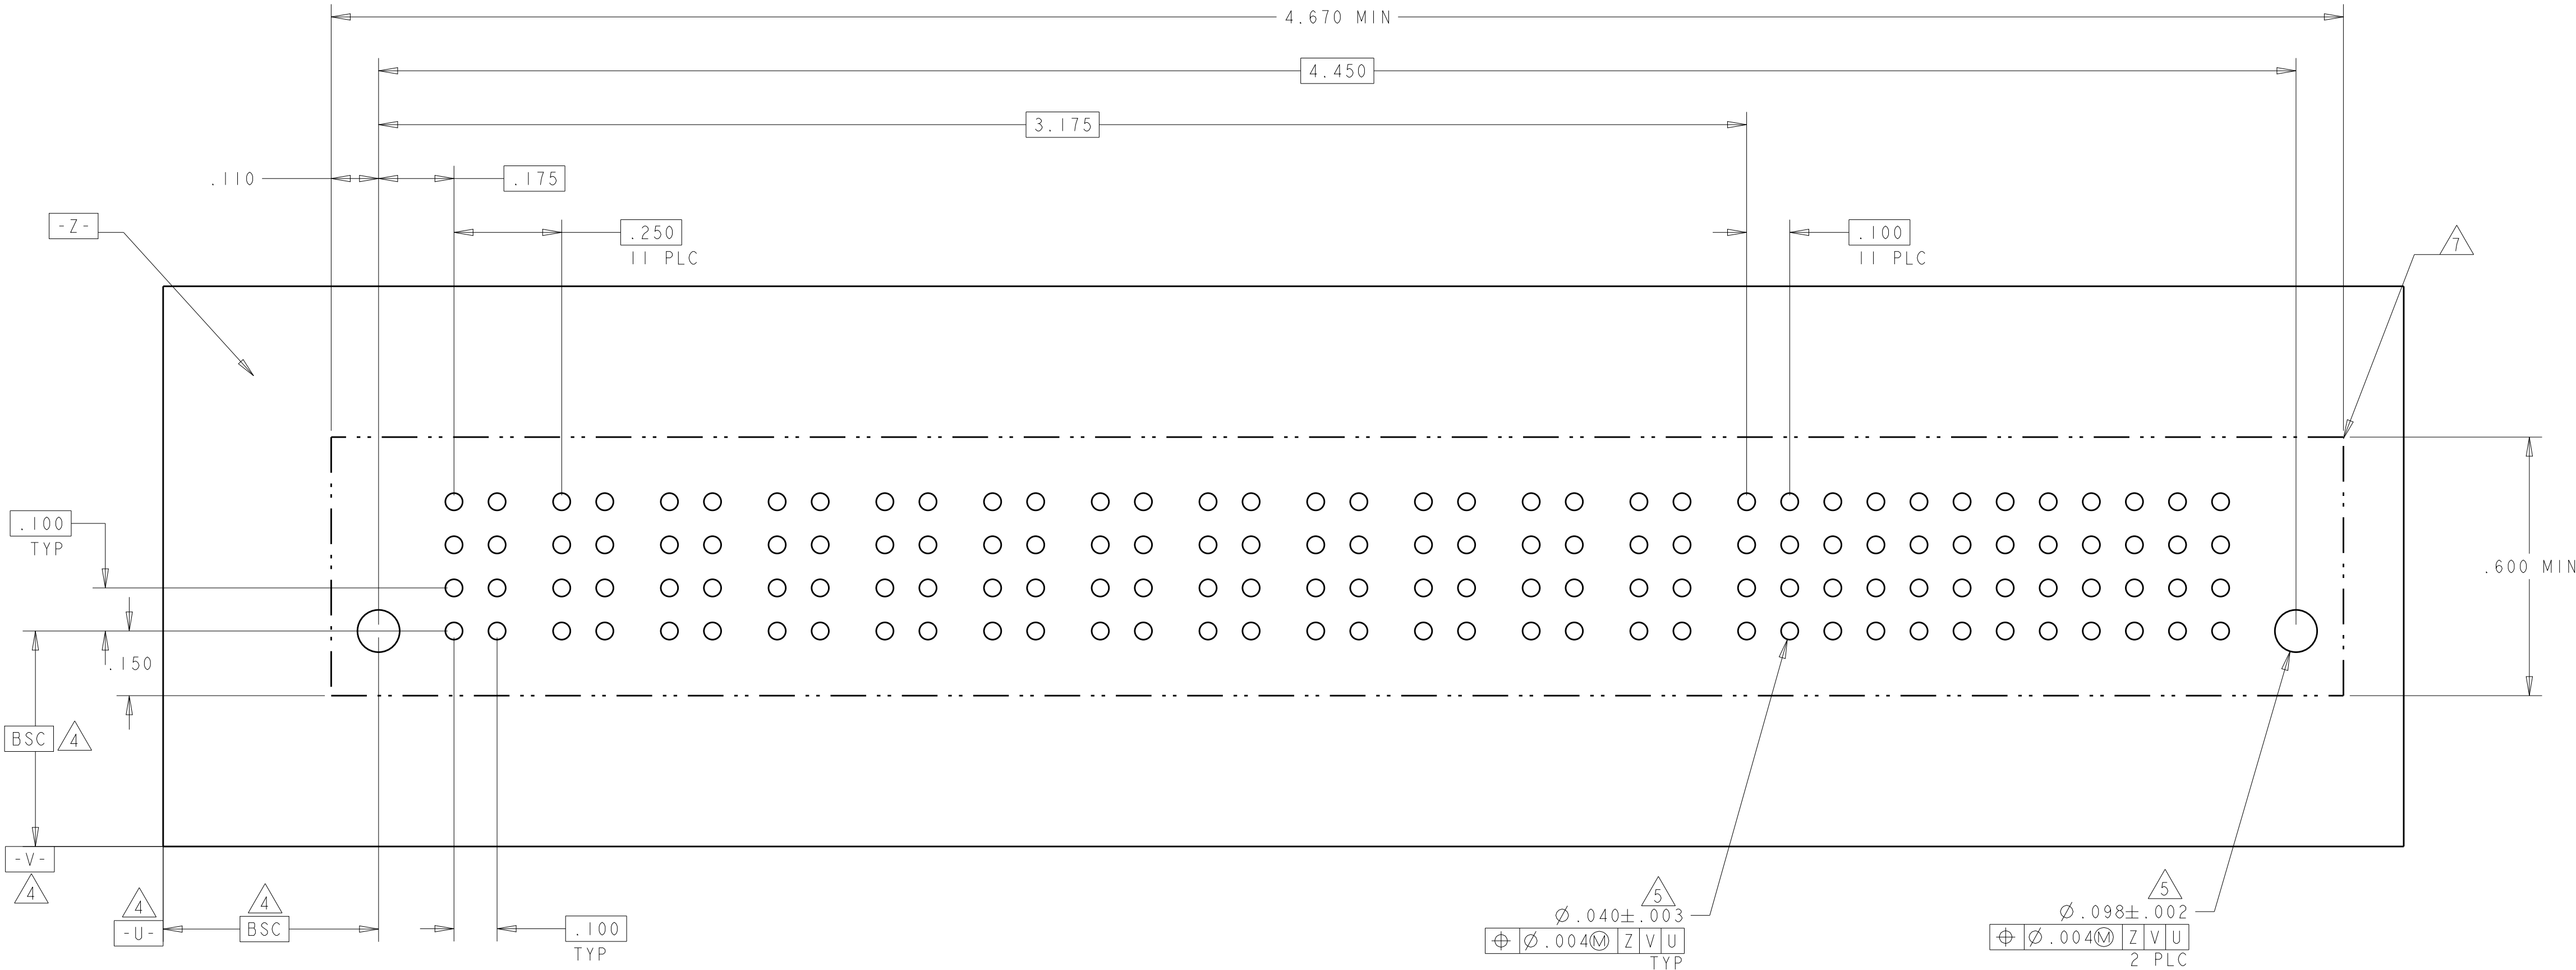

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450820





RESTRICTED TO
-


SCALE
-

SHEET
14

OF
20

REV
G8

PART NUMBER	ROWS		POWER					SIGNAL												POWER								
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	9	10	11	12	P6	P7	P8	P9	P10				
1-6450820-8	D C B A																											
							EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV		EV	EV	EV	EV
							EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV		EV	EV	EV	EV
							EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV		EV	EV	EV	EV
5P + 48S + 5P																												

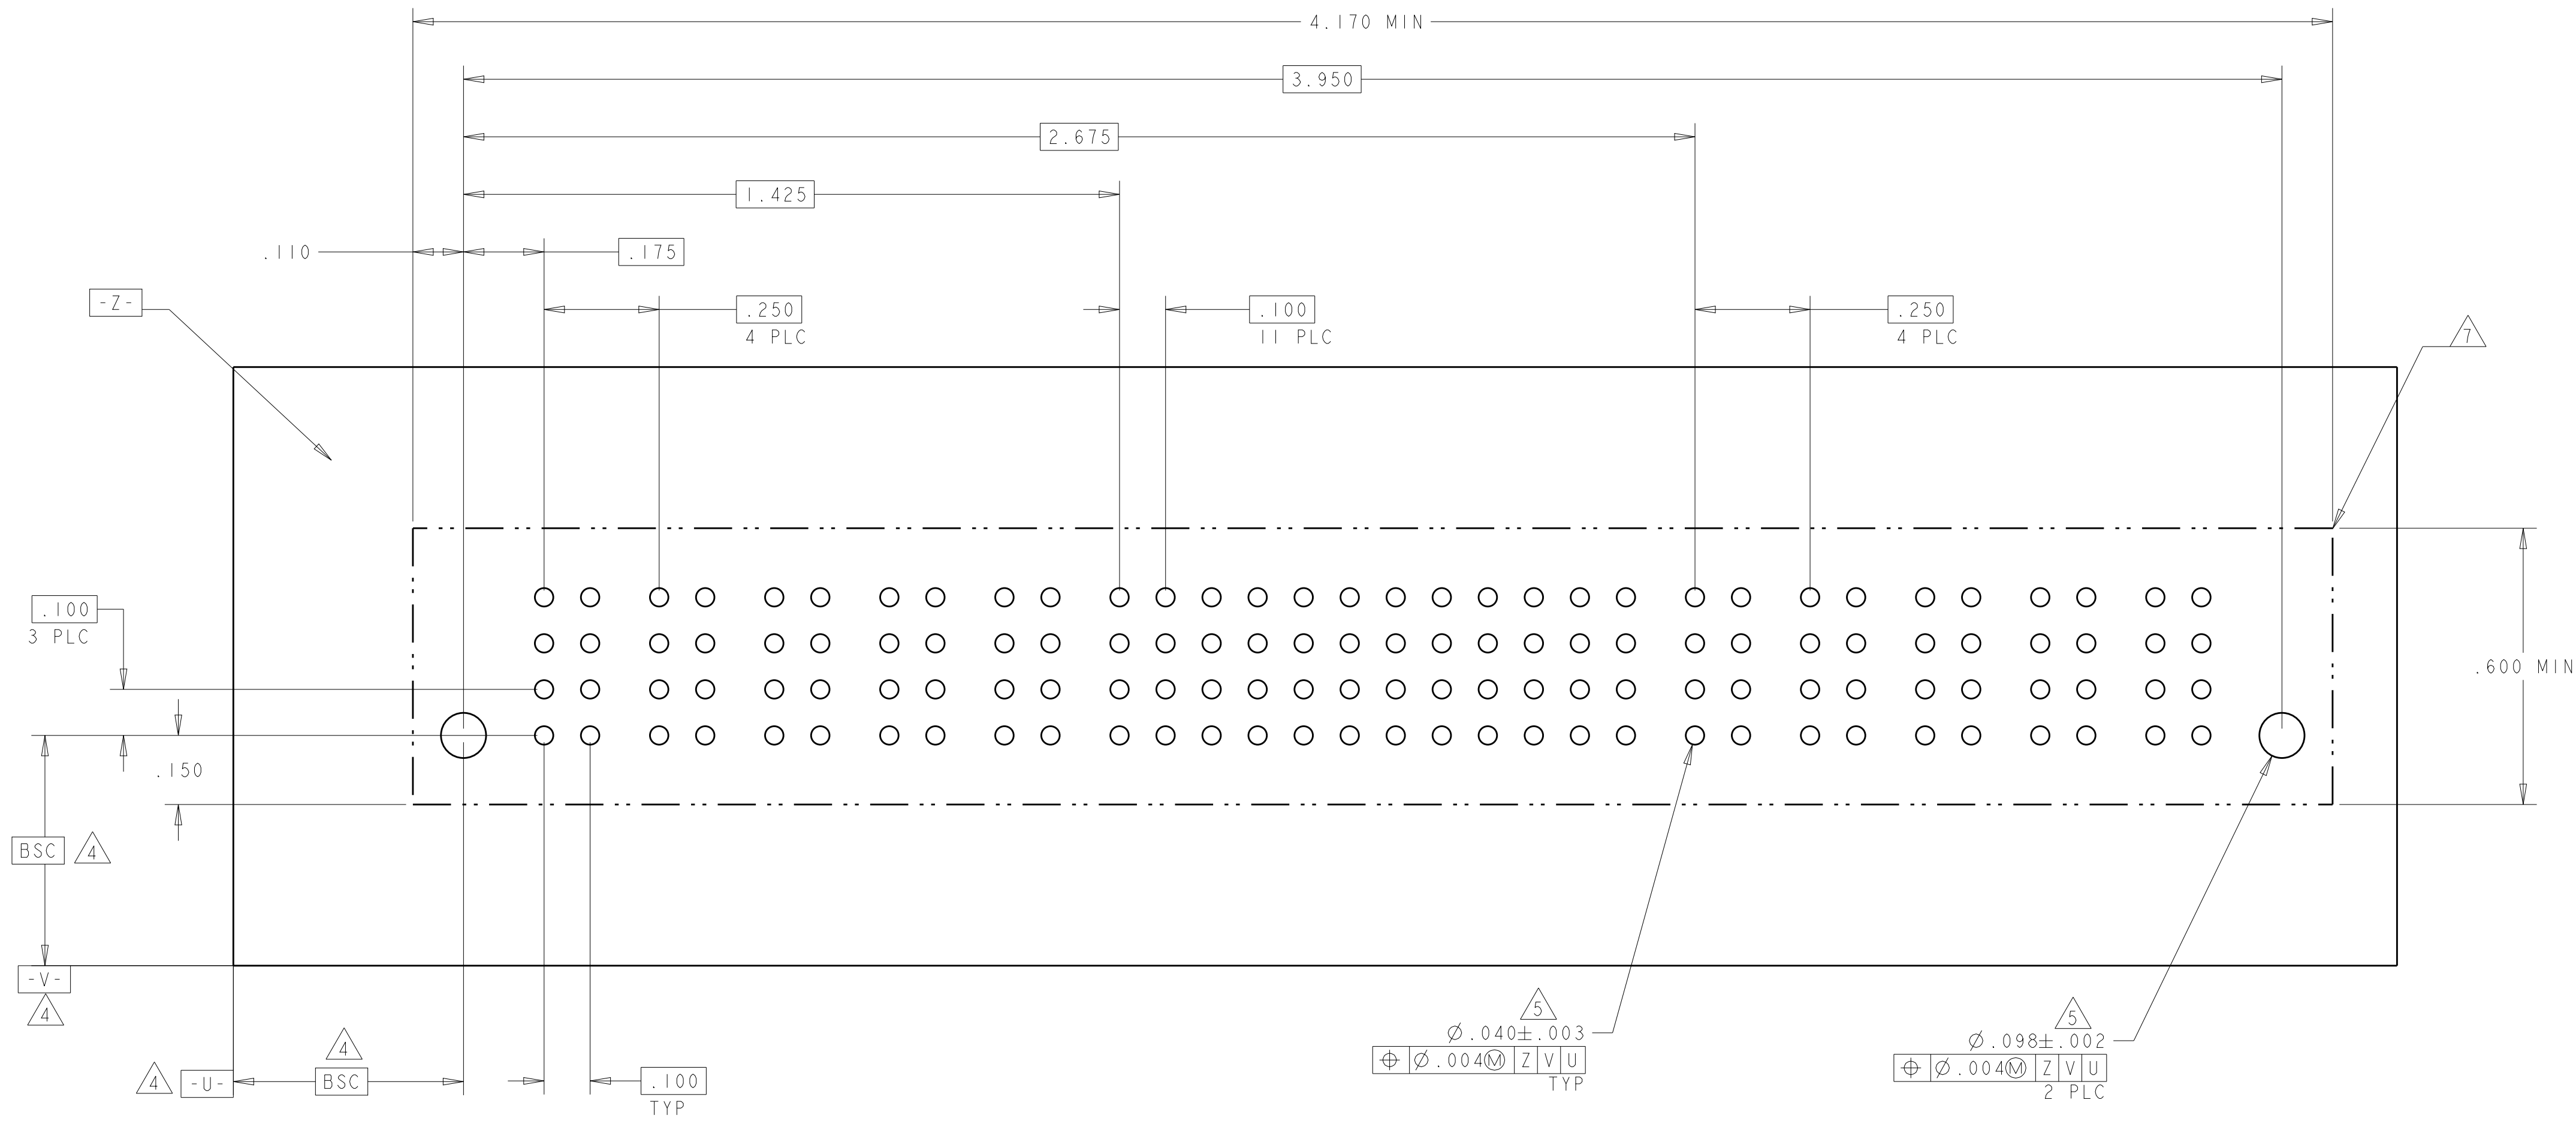


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D_ZHU 15NOV2007		TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		S_ZHAO APVD S_ZHAO		VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		PRODUCT SPEC		SIZE	
		108-2292		CAGE CODE	
		APPLICATION SPEC		DRAWING NO	
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 <i>7</i> ANGLES		114-13251		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT	
-		-		A100779 ©6450820	
				Customer Drawing	
				SCALE	
				SHEET 15 of 20	
				REV G8	

Technical drawing of a rectangular plate with dimensions and features. The overall dimensions are 3.570 MIN (width) and .600 MIN (height). The drawing includes a grid of 20 columns and 4 rows of holes. Key dimensions and features include:

- Overall width: 3.570 MIN
- Overall height: .600 MIN
- Top edge dimensions: 3.350, 2.050, 1.425, .200, .250, .100, .250
- Left edge dimensions: .110, .100 (3 PLC), .100 (BSC), .100 (V-), .100 (U-), .100 (BSC)
- Right edge dimensions: .100 (BSC), .100 (V-), .100 (U-), .100 (BSC)
- Bottom edge dimensions: .100 (BSC), .100 (V-), .100 (U-), .100 (BSC)
- Grid of 20 columns and 4 rows of holes
- Feature 5: $\varnothing .004 \pm .003$ Z V U TYP
- Feature 7: $\varnothing .004 \pm .002$ Z V U 2 PLC

4805 (3/11)

PART NUMBER	ROWS		LOW POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
2-6450820-1	D C B A							EV	EV	EV	EV	EV	EV					
								EV	EV	EV	EV	EV	EV					
								EV	EV	ES	EV	EV	EV					
								EV	EV	EV	EV	EV	EV					
6LP + 24S + 3P																		

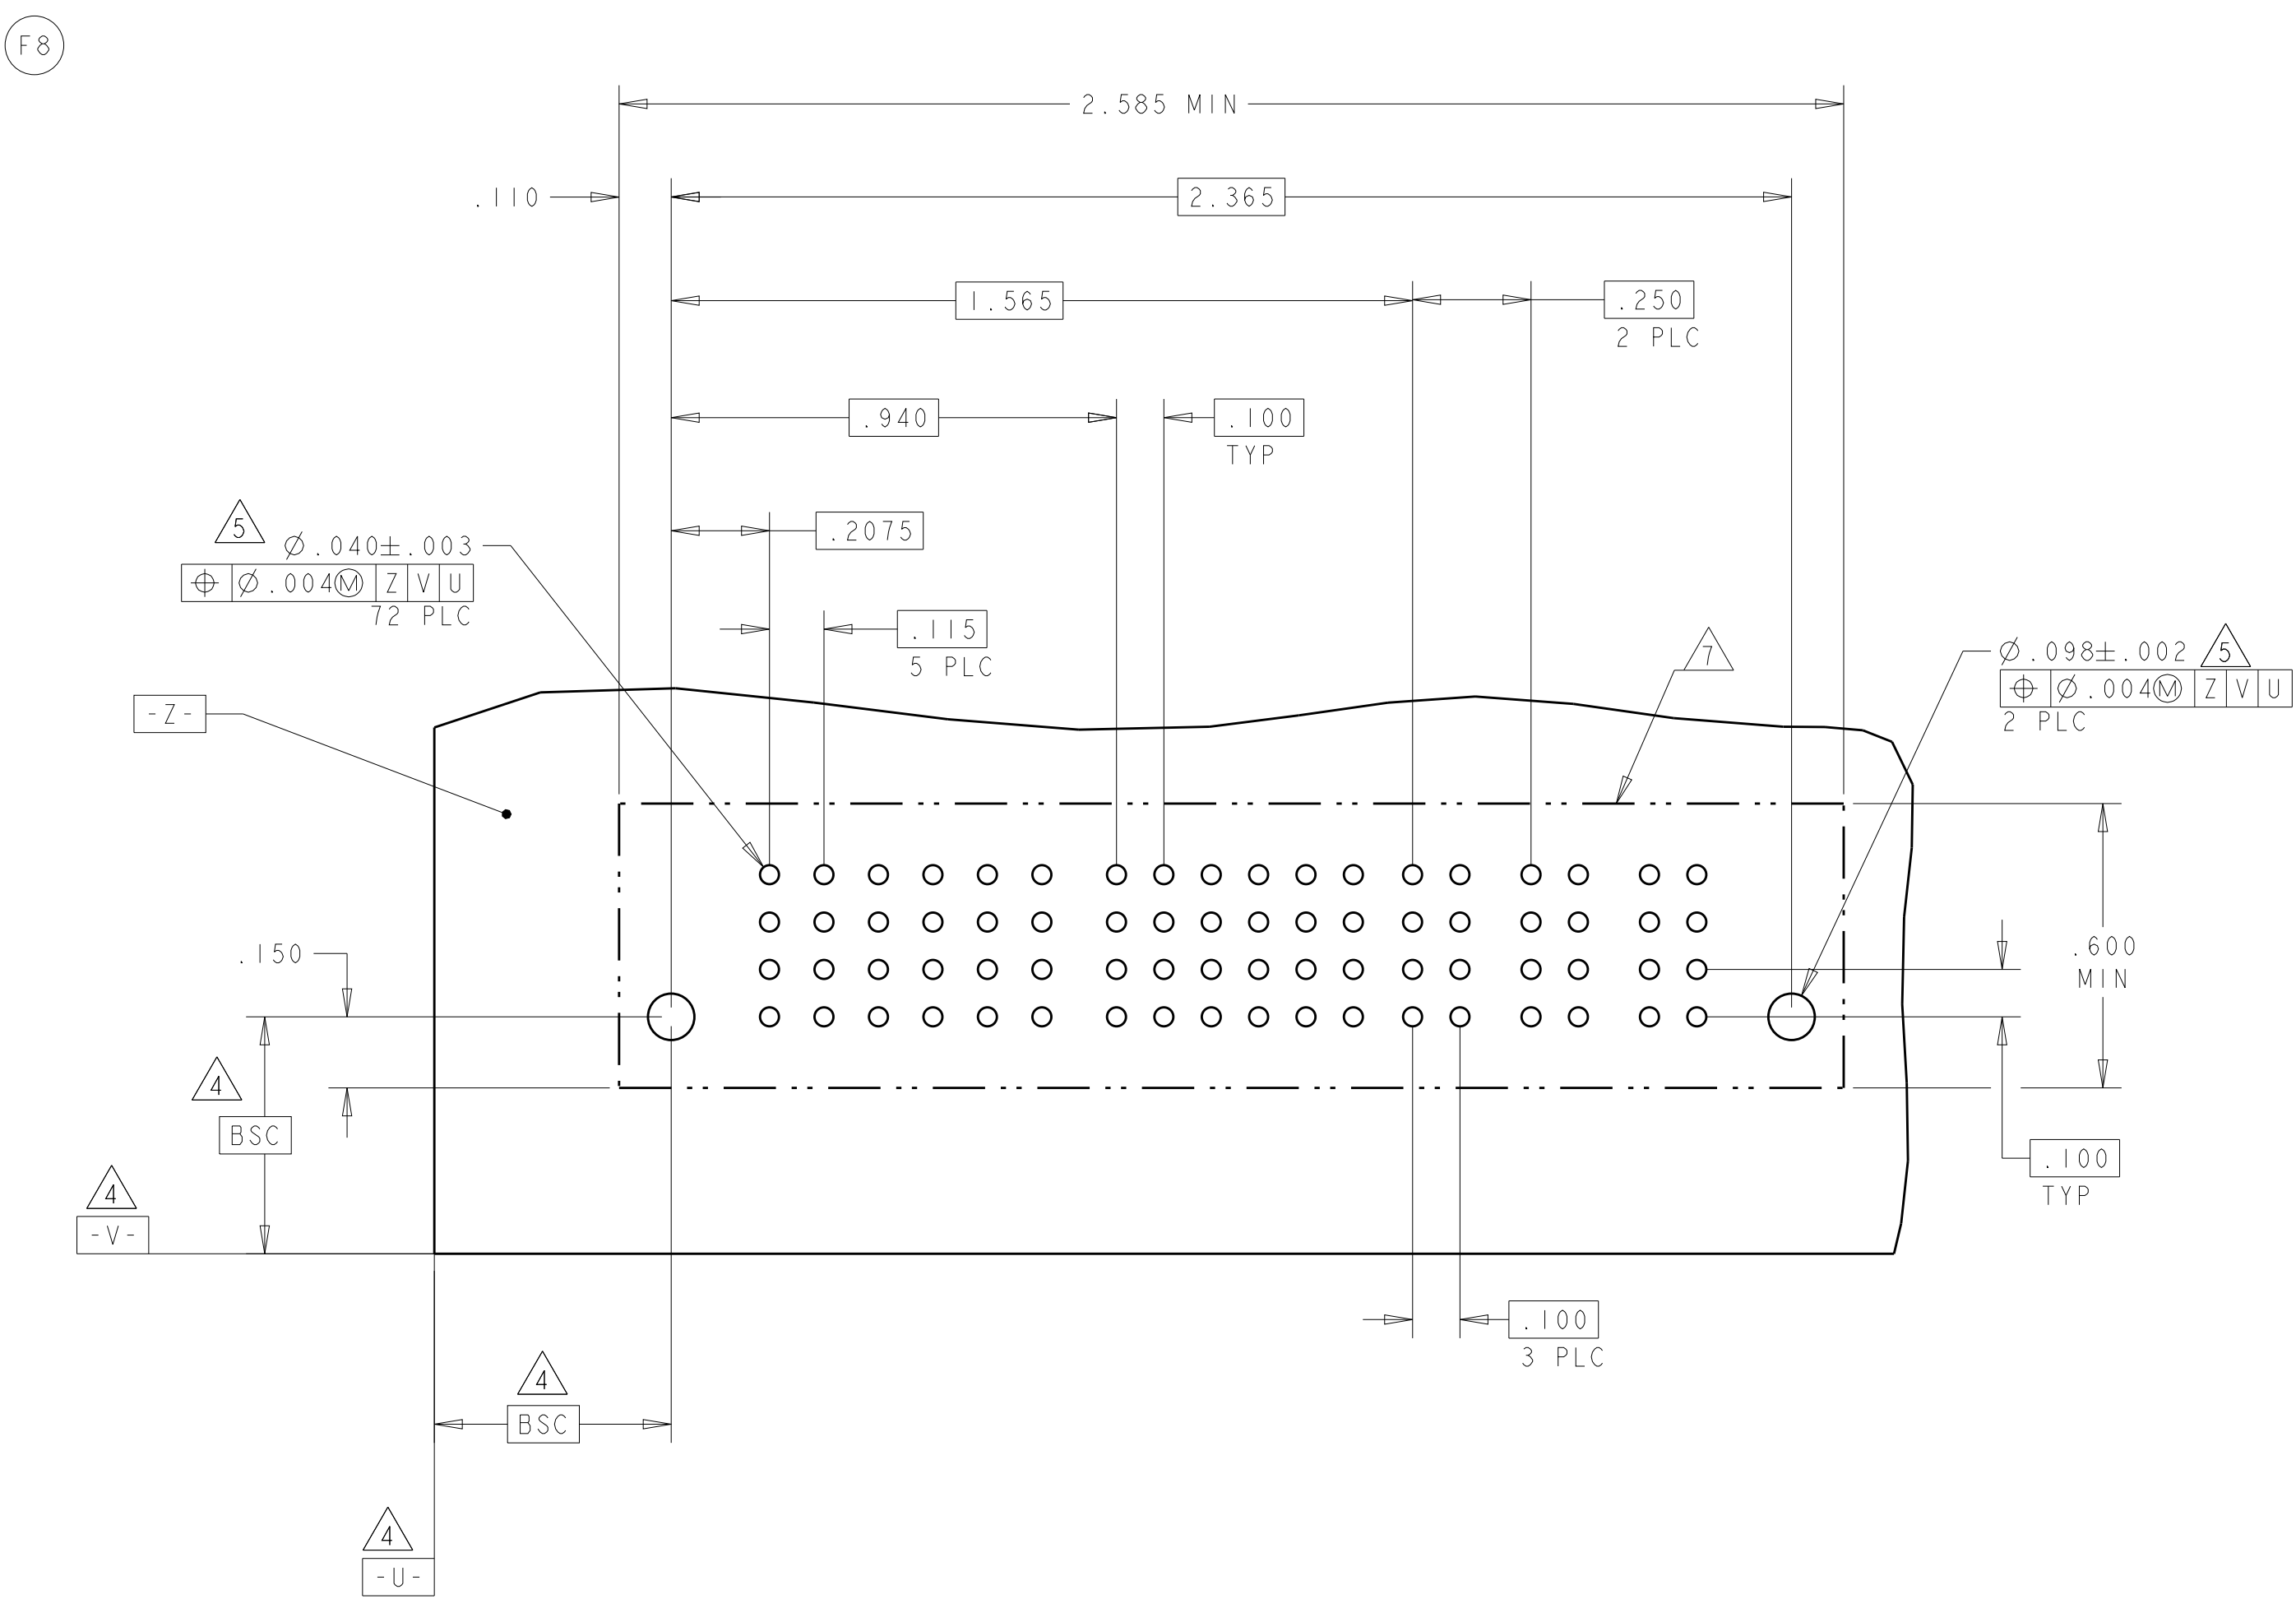
4805 (3/11)

PART NUMBER	ROWS		POWER								SIGNAL																		POWER																				
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	P9	P10	P11	P12	P13	P14	P15	P16													
6450820-9	D C B A		VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV													
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV		
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
8P + 72S + 8P																																																	

4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER										SIGNAL									
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6				
2-6450820-3	D	HD	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM							HD
	C															EV EV EV EV EV EV						
	B															EV EV EV EV EV EV						
	A															EV EV EV EV EV EV						
	10HDP + 24S																					

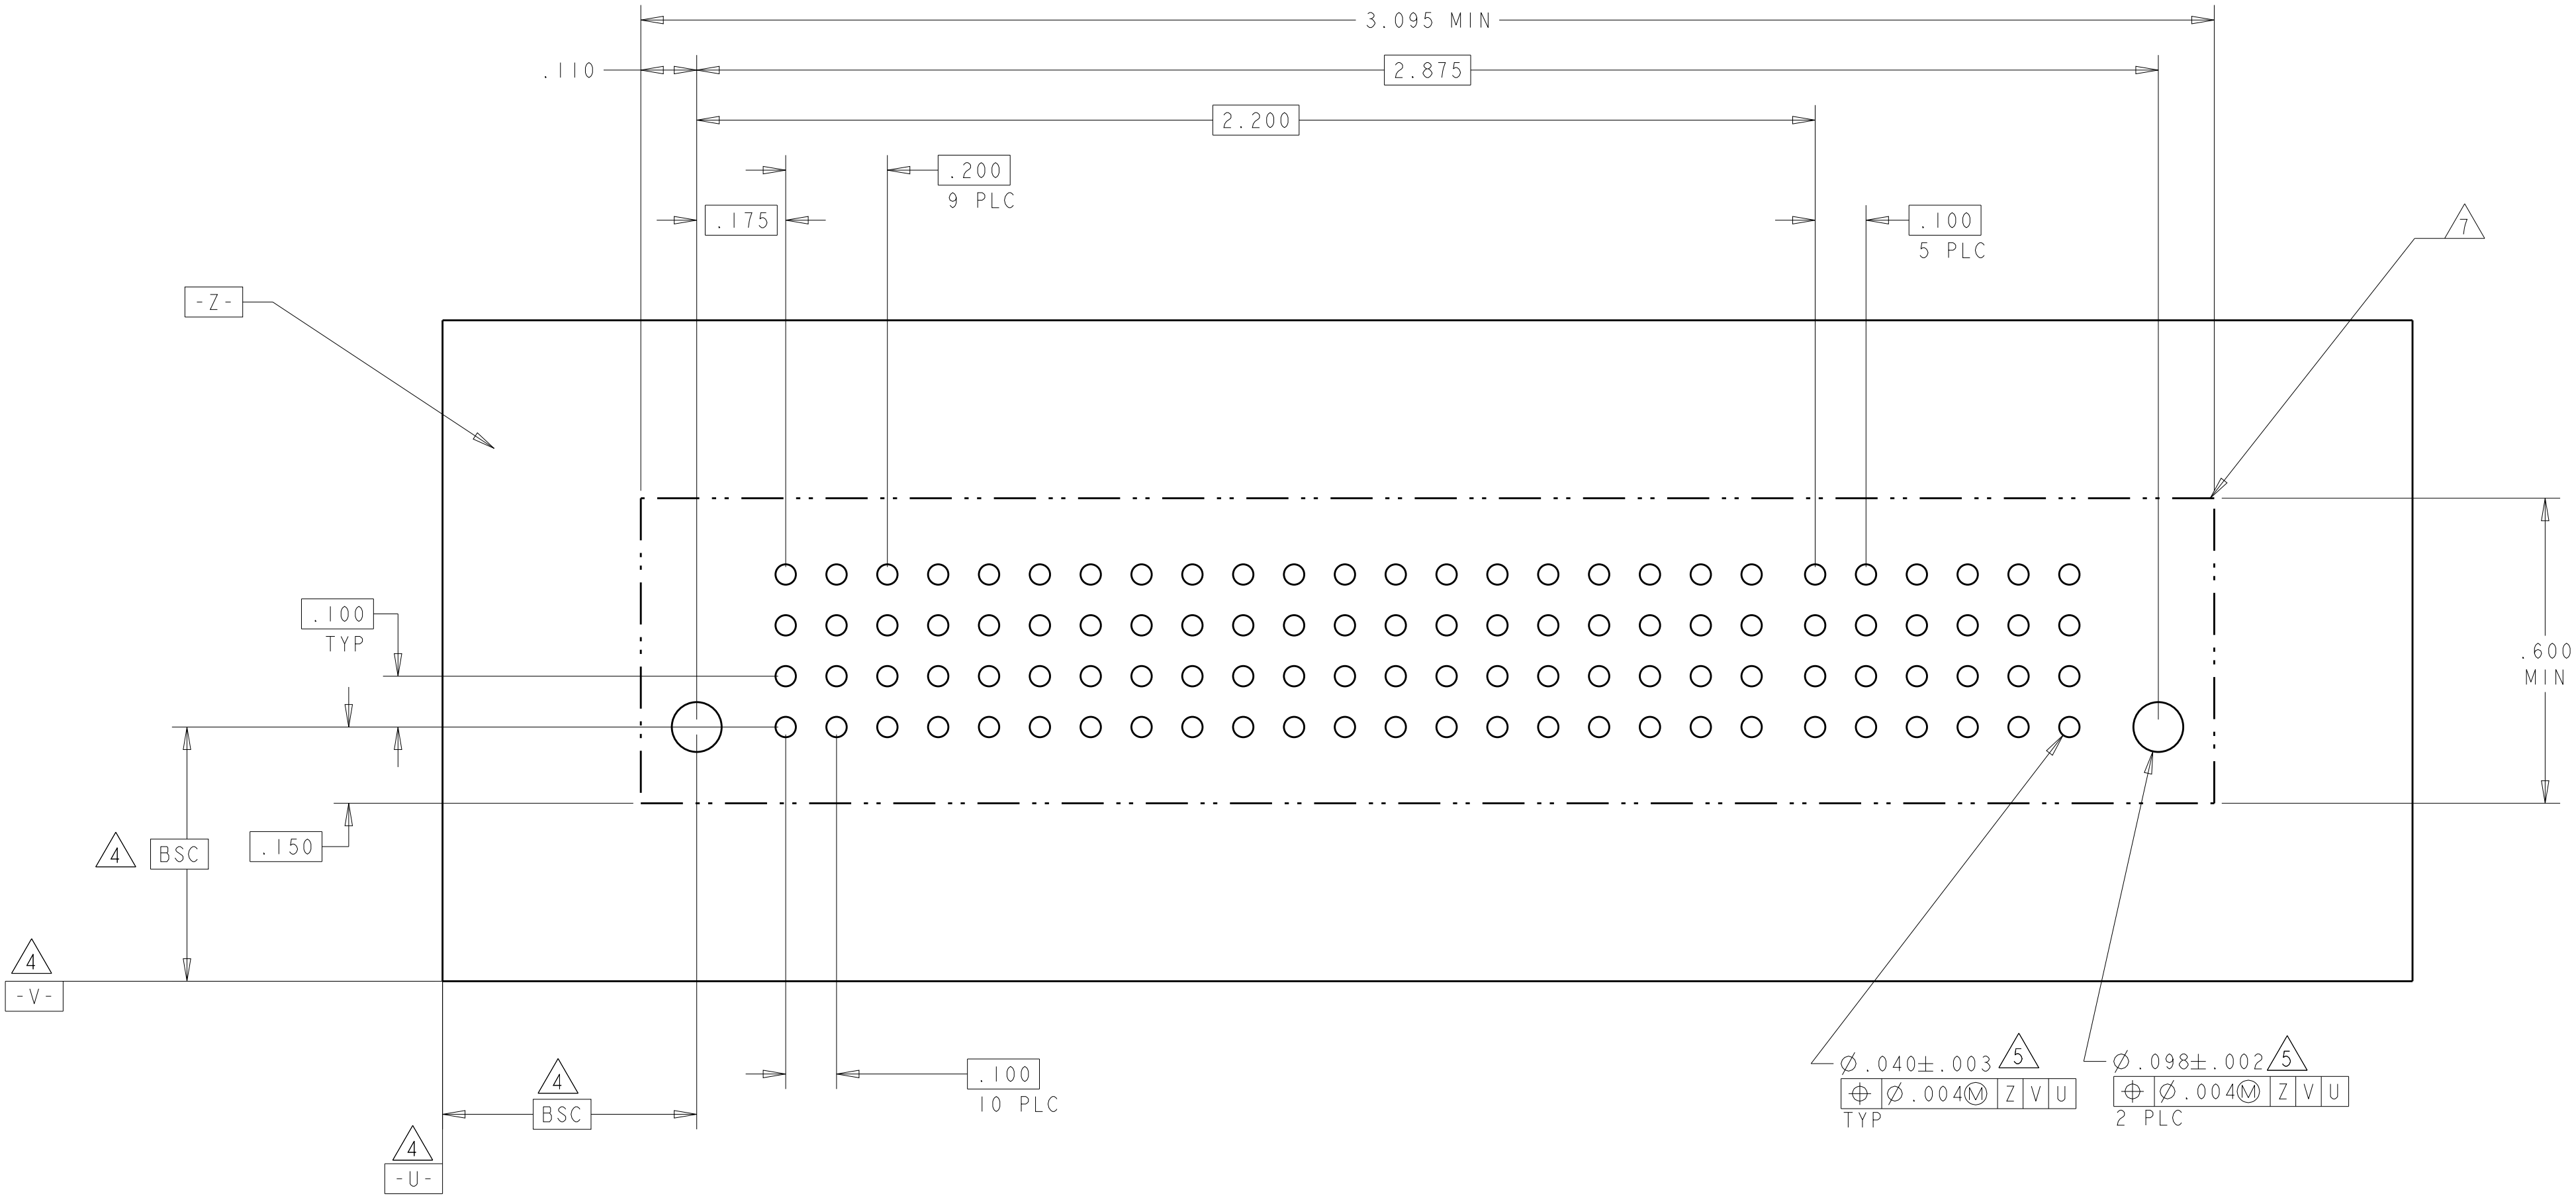

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

MATERIAL
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

TE Connectivity



SCALE
-

SHEET
19

OF
20

REV
G8

68

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6450820-5](#)