


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	BY -	ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED PER ECR-16-011506	23JUN2017	NK	CX
	C2	ECO-19-006934	13MAY2019	AP	WS

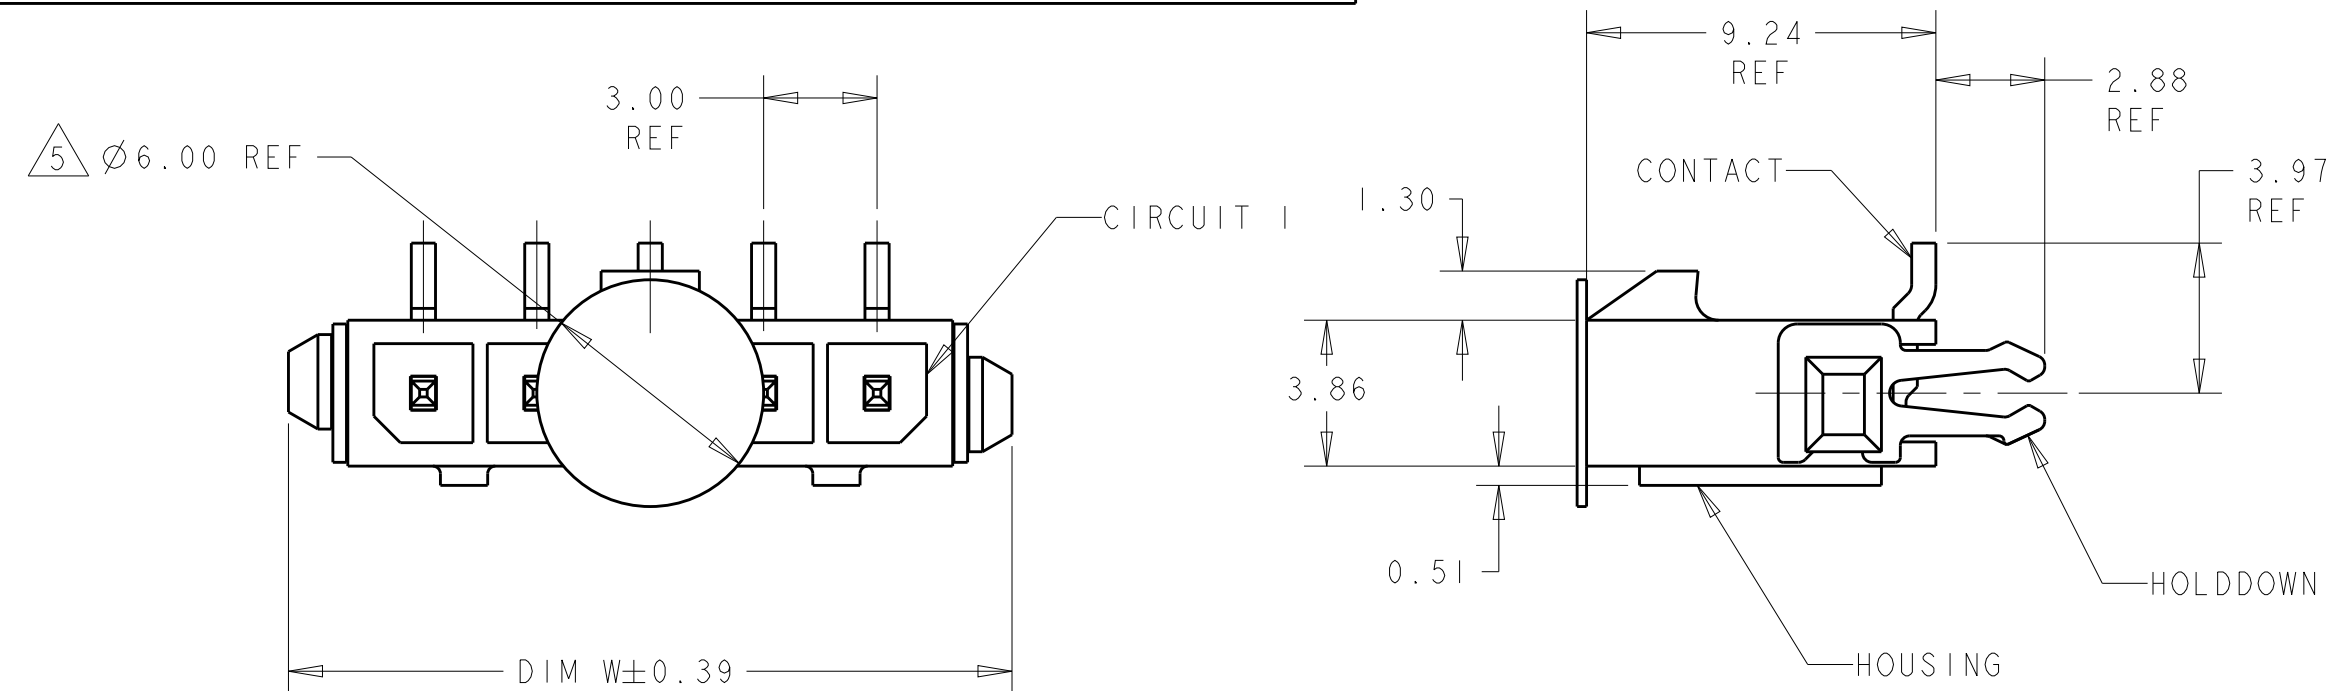


	MATERIAL:	CONTACTS - BRASS
		HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
		HOLDDOWNS: - PHOSPHOR BRONZE.

2 PLATING: CONTACTS - 0.76μm MINIMUM GOLD ON MATING END,
2.54μm MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27μm MINIMUM NICKEL.
HOLDDOWNS: 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM
NICKEL.


△ 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

5 KAPTON VACUUM PICK UP BUTTON.

6 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

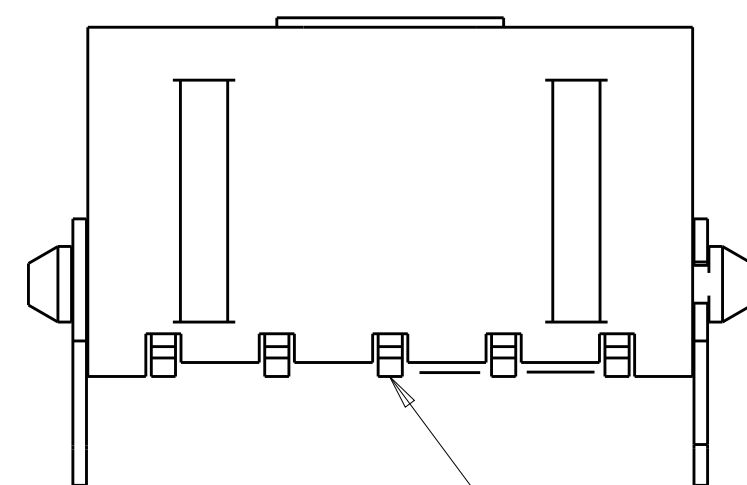


 0.15
 INCLUDES CONTACT TAILS
 AND HOUSING STANDOFFS

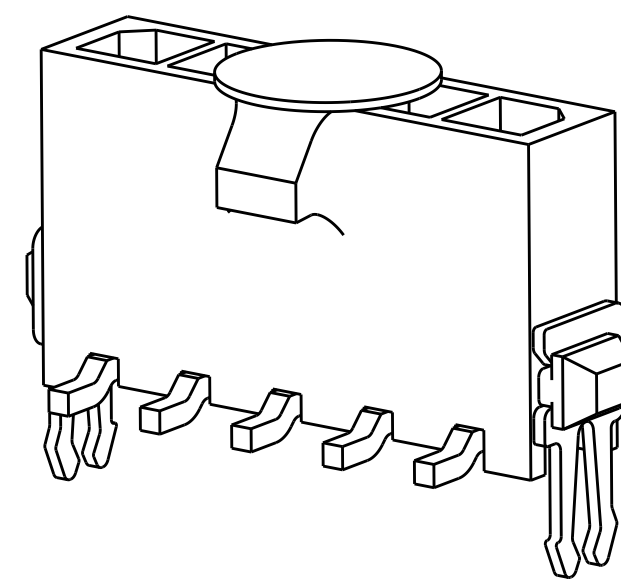

	33.00	37.43	40.00	12	3-1445095-2
	30.00	34.43	37.00	11	3-1445095-1
	27.00	31.43	34.00	10	3-1445095-0
	24.00	28.43	31.00	9	2-1445095-9
	21.00	25.43	28.00	8	2-1445095-8
	18.00	22.43	25.00	7	2-1445095-7
	15.00	19.43	22.00	6	2-1445095-6
	12.00	16.43	19.00	5	2-1445095-5
	9.00	13.43	16.00	4	2-1445095-4
	6.00	10.43	13.00	3	2-1445095-3
	3.00	7.43	10.00	2	2-1445095-2

SUPERSEDED BY 3-1445095-2		33.00	37.43	40.00	12	+1445095-2
SUPERSEDED BY 3-1445095-1		30.00	34.43	37.00	11	+1445095-1
SUPERSEDED BY 3-1445095-0		27.00	31.43	34.00	10	+1445095-0
SUPERSEDED BY 2-1445095-9		24.00	28.43	31.00	9	+445095-9
SUPERSEDED BY 2-1445095-8		21.00	25.43	28.00	8	+445095-8
SUPERSEDED BY 2-1445095-7		18.00	22.43	25.00	7	+445095-7
SUPERSEDED BY 2-1445095-6		15.00	19.43	22.00	6	+445095-6
SUPERSEDED BY 2-1445095-5		12.00	16.43	19.00	5	+445095-5
SUPERSEDED BY 2-1445095-4		9.00	13.43	16.00	4	+445095-4
SUPERSEDED BY 2-1445095-3		6.00	10.43	13.00	3	+445095-3
SUPERSEDED BY 2-1445095-2		3.00	7.43	10.00	2	+445095-2

FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER
--------	-------	-------	-------	----------------	-------------

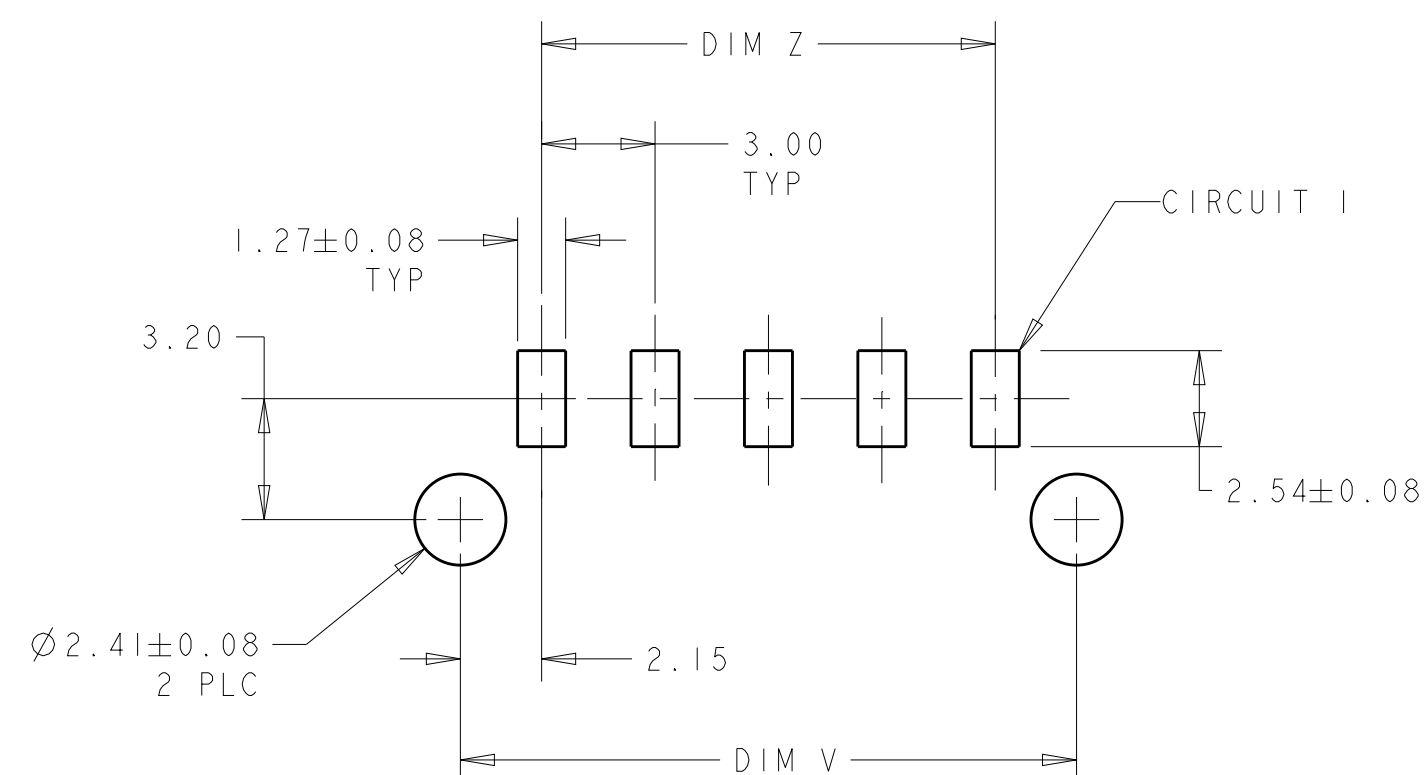PCB LAYOUT COMPONENT SIDE 

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09OCT2000 J. ROOT CHK 20-FEB-2001 K. WHITAKER APVD 20-FEB-2001 C. JONES		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±: 1 PLC ±: 2 PLC ±0.13 3 PLC ±: 4 PLC ±: ANGLES ±: FINISH		NAME VERTICAL SURF MOUNT HEADER ASSY, 30 MIC GOLD CONTACTS, THRU HOLE HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™	
MATERIAL 		PRODUCT SPEC 108-1836 APPLICATION SPEC 114-13000 WEIGHT -		SIZE CAGE CODE DRAWING NO A200779 C-1445095	
SEE TABLE		CUSTOMER DRAWING		SCALE 5:1	SHEET OF REV C2