
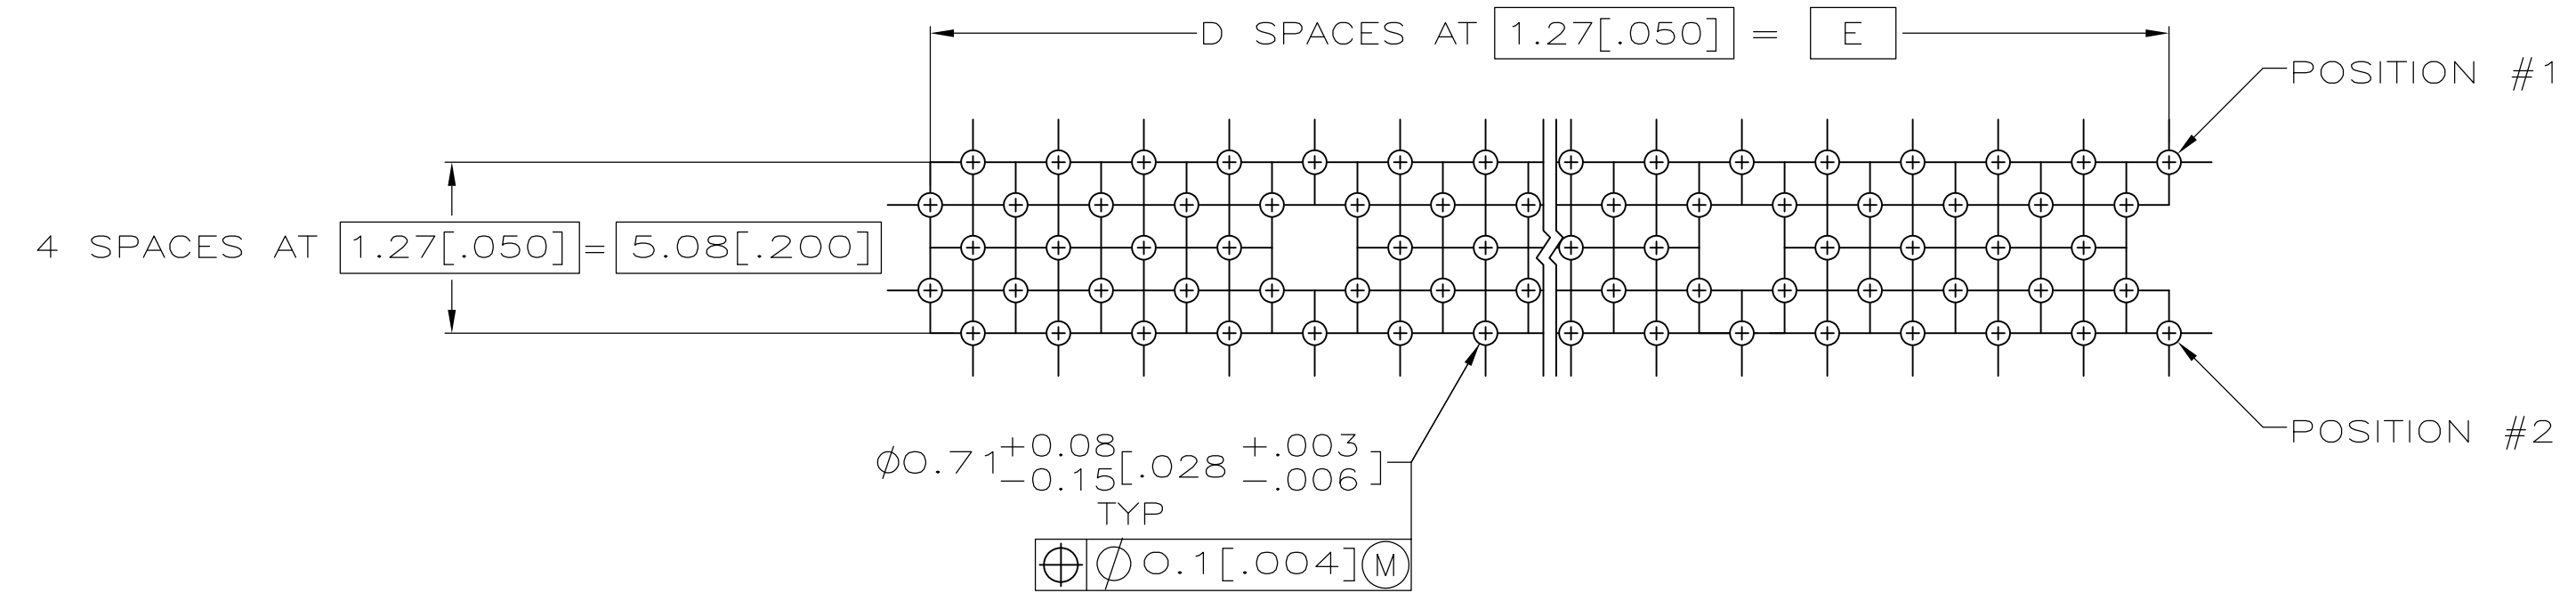


- △1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC, COLOR NATURAL.
PIN CONTACTS: PHOSPHOR BRONZE.
GROUND BUSES: PHOSPHOR BRONZE.
- △2 CONTACTS & GROUND BUSES: 0.00076(.000030) MIN. GOLD PER ASTM B 488 ON CONTACT AREA, 0.00254-0.00762(.000100-.000300) MATTE TIN PER ASTM B 545 ON SOLDER TAIL, ALL OVER 0.00127-0.00254(.000050-.000100) MATTE NICKEL PER SAE AMS-QQ-N-290 ON ENTIRE CONTACT.
- △3 DATE CODE MARKED IN AREA INDICATED.

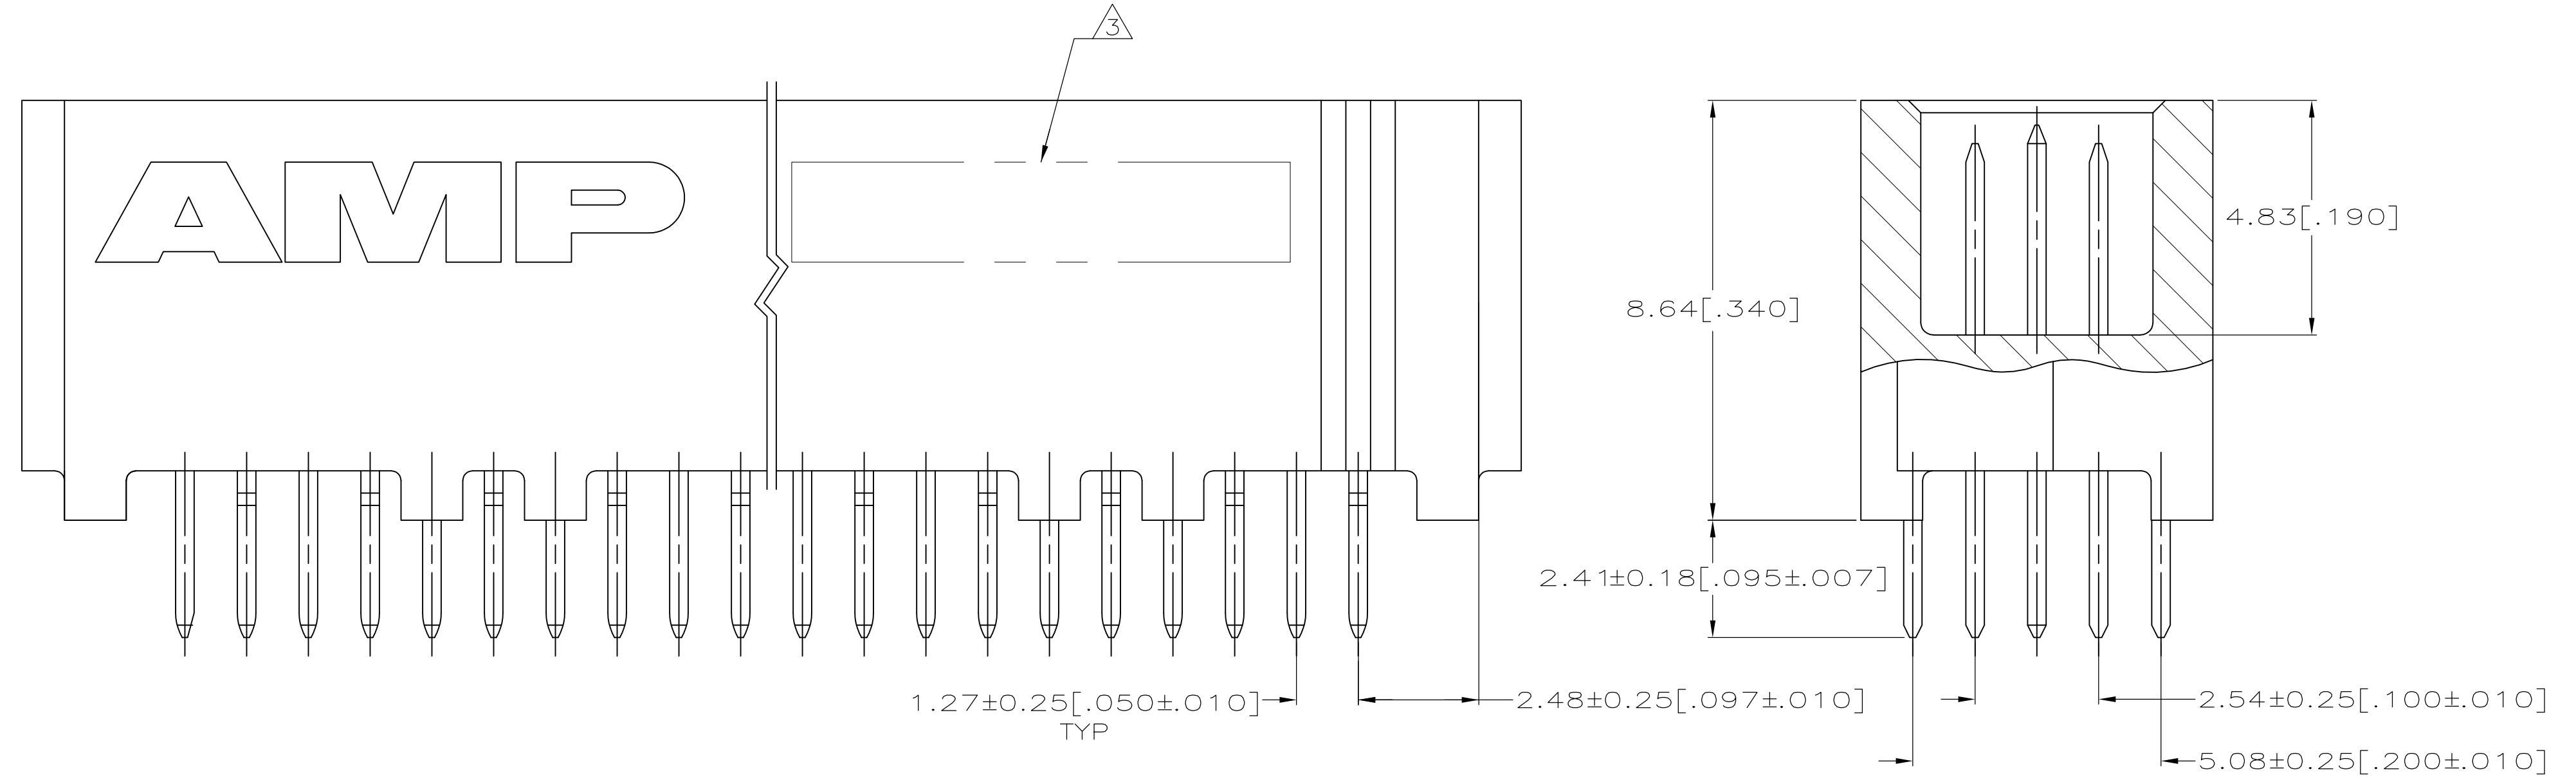

| | | | | | | | |
|----------|----------------|-----|----------------|----------------|----------------|-----------|-------------|
| | 151.13 [5.950] | 119 | 153.62 [6.048] | 156.08 [6.145] | 157.84 [6.214] | 240 | 1-5536280-1 |
| OBSOLETE | 125.73 [4.950] | 99 | 128.22 [5.048] | 130.68 [5.145] | 132.44 [5.214] | 200 | 5536280-9 |
| | 113.03 [4.450] | 89 | 115.52 [4.548] | 117.98 [4.645] | 119.74 [4.714] | 180 | 5536280-8 |
| | 100.33 [3.950] | 79 | 102.82 [4.048] | 105.28 [4.145] | 107.04 [4.214] | 160 | 5536280-7 |
| OBSOLETE | 87.63 [3.450] | 69 | 90.12 [3.548] | 92.58 [3.645] | 94.34 [3.714] | 140 | 5536280-6 |
| | 74.93 [2.950] | 59 | 77.42 [3.048] | 79.88 [3.145] | 81.64 [3.214] | 120 | 5536280-5 |
| | 62.23 [2.450] | 49 | 64.72 [2.548] | 67.18 [2.645] | 68.94 [2.714] | 100 | 5536280-4 |
| | 49.53 [1.950] | 39 | 52.02 [2.048] | 54.48 [2.145] | 56.24 [2.214] | 80 | 5536280-3 |
| OBSOLETE | 36.83 [1.450] | 29 | 39.32 [1.548] | 41.78 [1.645] | 43.54 [1.714] | 60 | 5536280-2 |
| | 24.13 [.950] | 19 | 26.62 [1.048] | 29.08 [1.145] | 30.84 [1.214] | 40 | 5536280-1 |
| | E | D | C | B | A | NO OF POS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|-------------------------|--|-----------------------------|---|
| DIMENSIONS: mm [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DIN G. ATTADIA 01-19-05 | STE TE Connectivity |
| 0 PLC ± - | 1 PLC ± - | 01-19-05 | NAME: PLUG ASSEMBLY, 10.92 [.430] STACK, 2.41 [.095] SOLDER TAIL, BOARD TO BOARD, MICRO-STRIP |
| 2 PLC ± - | 3 PLC ± 0.13 [.005] | APVD D. DIXON 01-19-05 | PRODUCT SPEC: 108-1272 |
| 4 PLC ± - | ANGLES ± - | APPLICATION SPEC: 114-11005 | SIZE: A1 |
| MATERIAL: △1 | FINISH: △2 | WEIGHT: - | SCALE: 10:1 |
| CUSTOMER DRAWING | | DATE: 11MAR11 | REV: P |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5536280-7](#)