




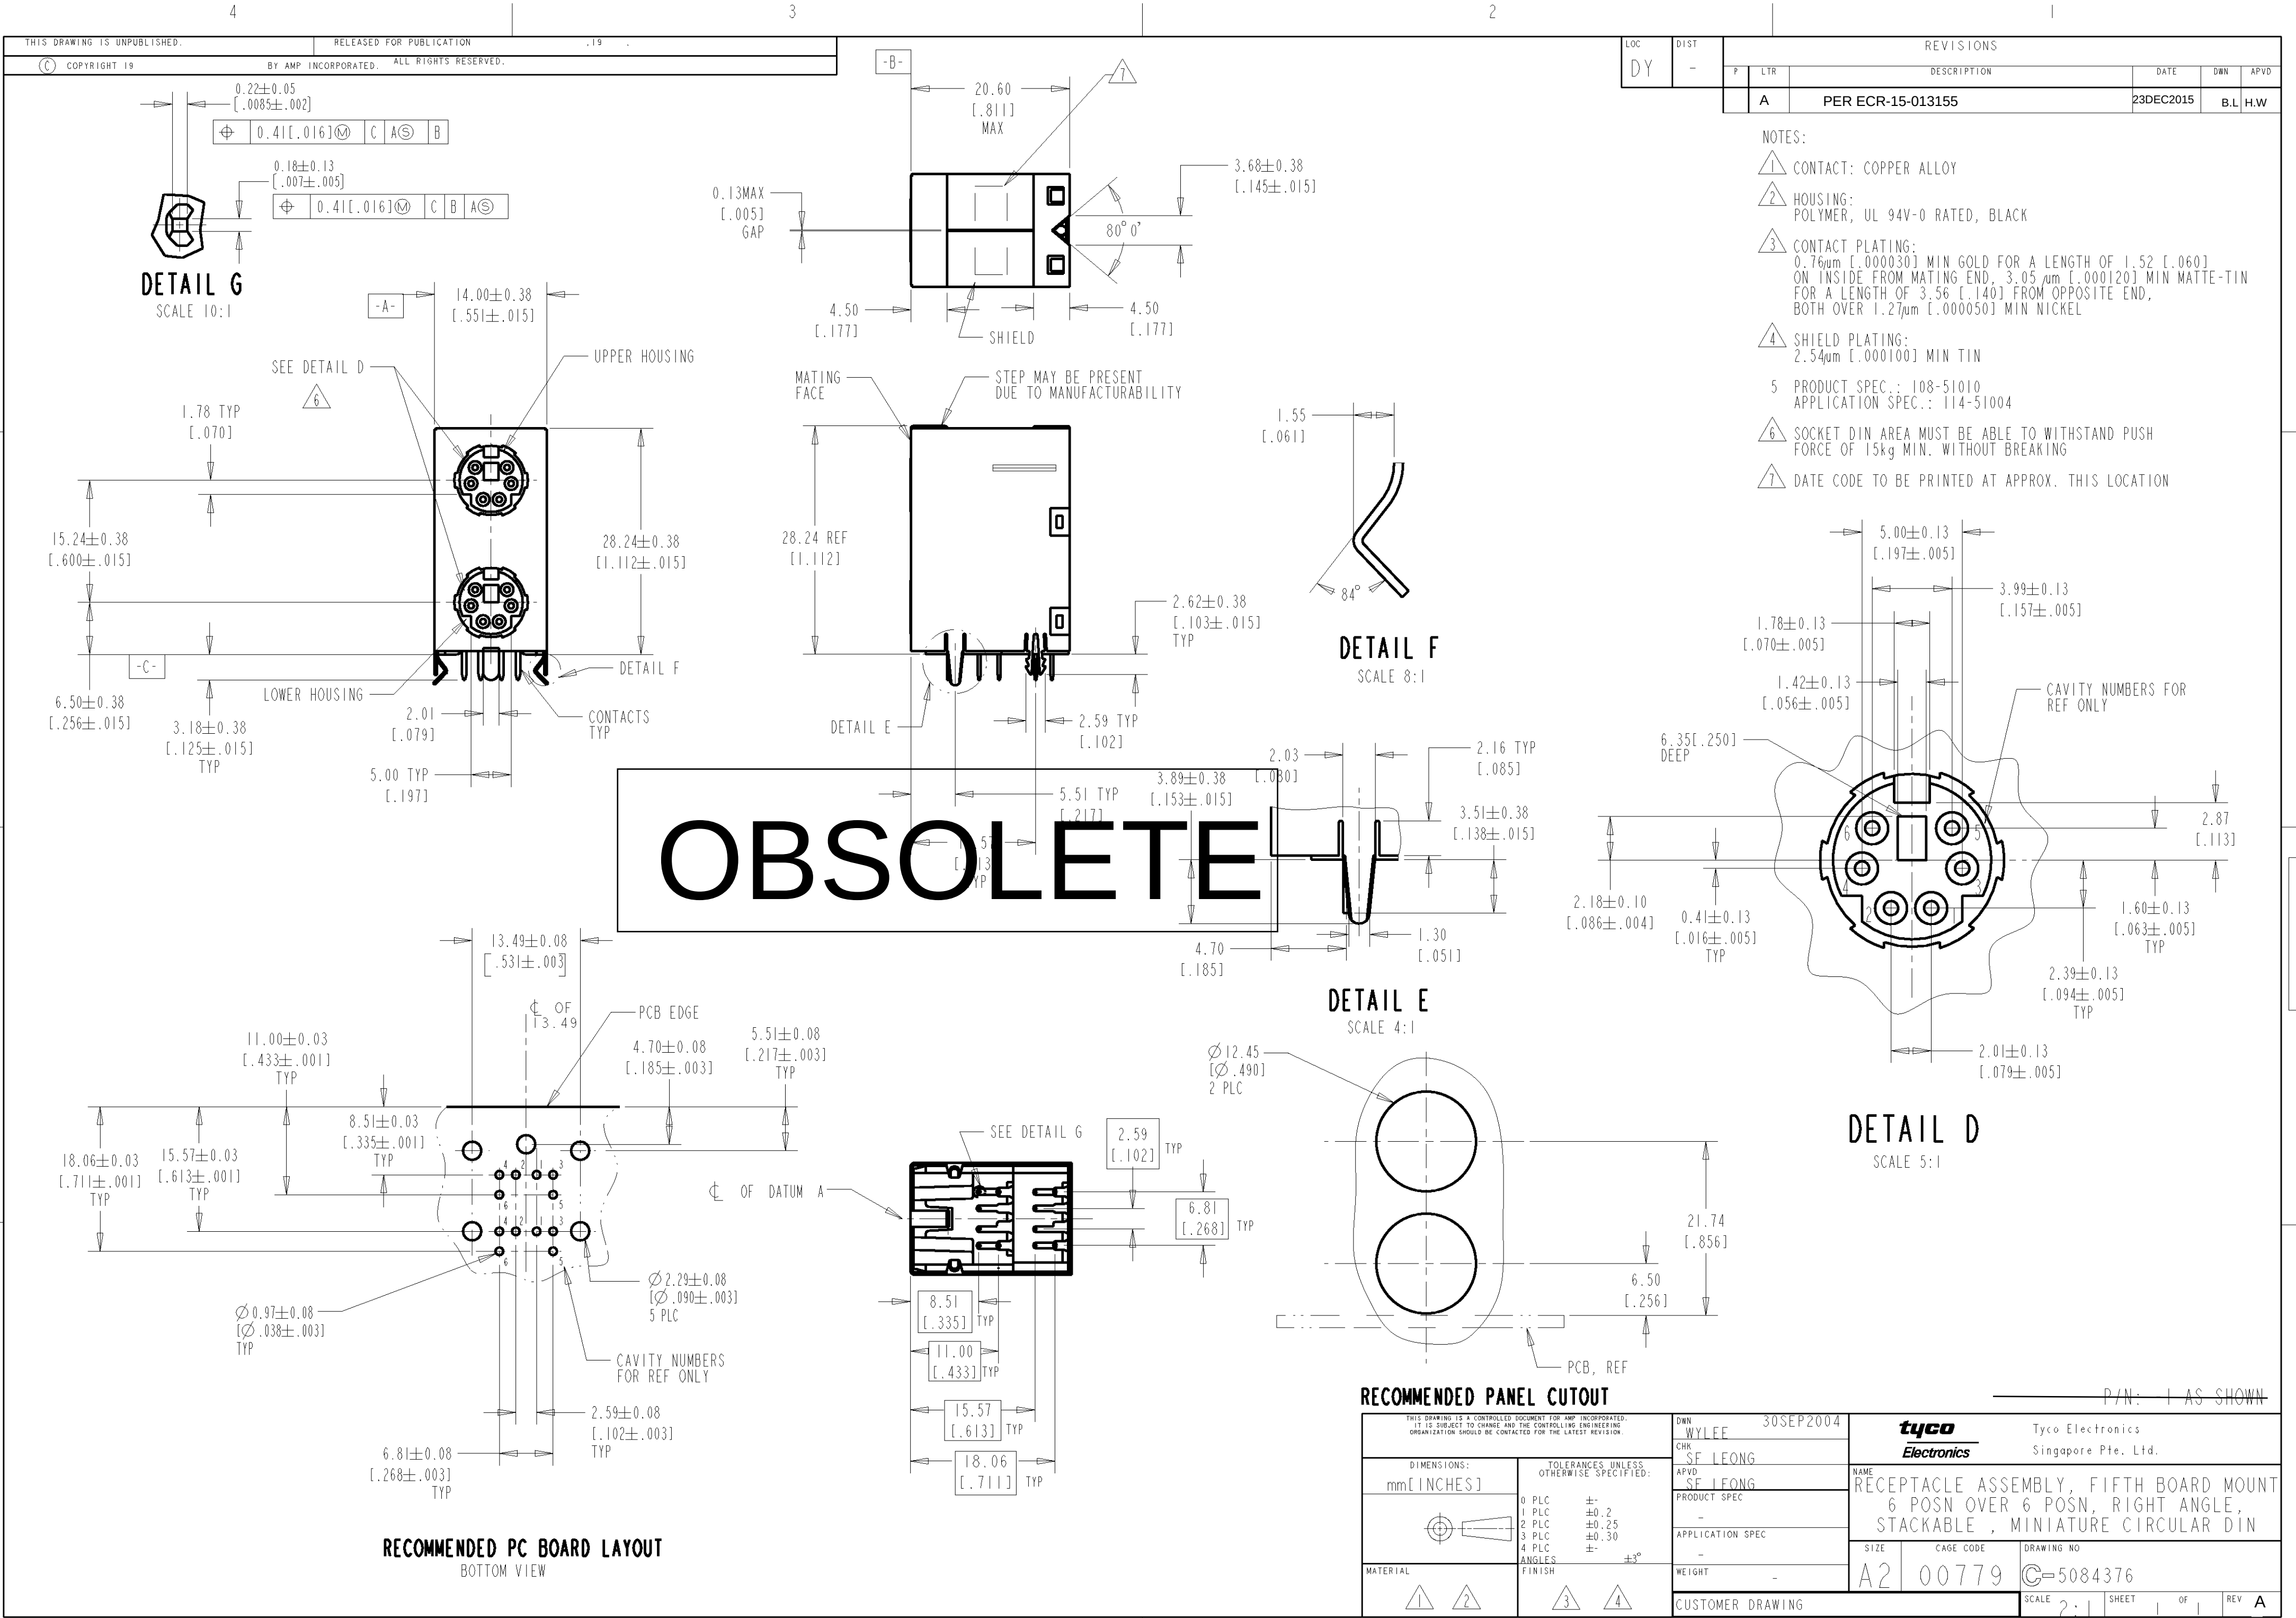


- NOTES:
- 1 CONTACT: COPPER ALLOY
 - 2 HOUSING: POLYMER, UL 94V-0 RATED, BLACK
 - 3 CONTACT PLATING: 0.76µm [0.00030] MIN GOLD FOR A LENGTH OF 1.52 [0.060] ON INSIDE FROM MATING END, 3.05 µm [0.00120] MIN MATTE-TIN FOR A LENGTH OF 3.56 [0.140] FROM OPPOSITE END, BOTH OVER 1.27µm [0.00050] MIN NICKEL
 - 4 SHIELD PLATING: 2.54µm [0.00100] MIN TIN
 - 5 PRODUCT SPEC.: 108-51010 APPLICATION SPEC.: 114-51004
 - 6 SOCKET DIN AREA MUST BE ABLE TO WITHSTAND PUSH FORCE OF 15kg MIN. WITHOUT BREAKING
 - 7 DATE CODE TO BE PRINTED AT APPROX. THIS LOCATION

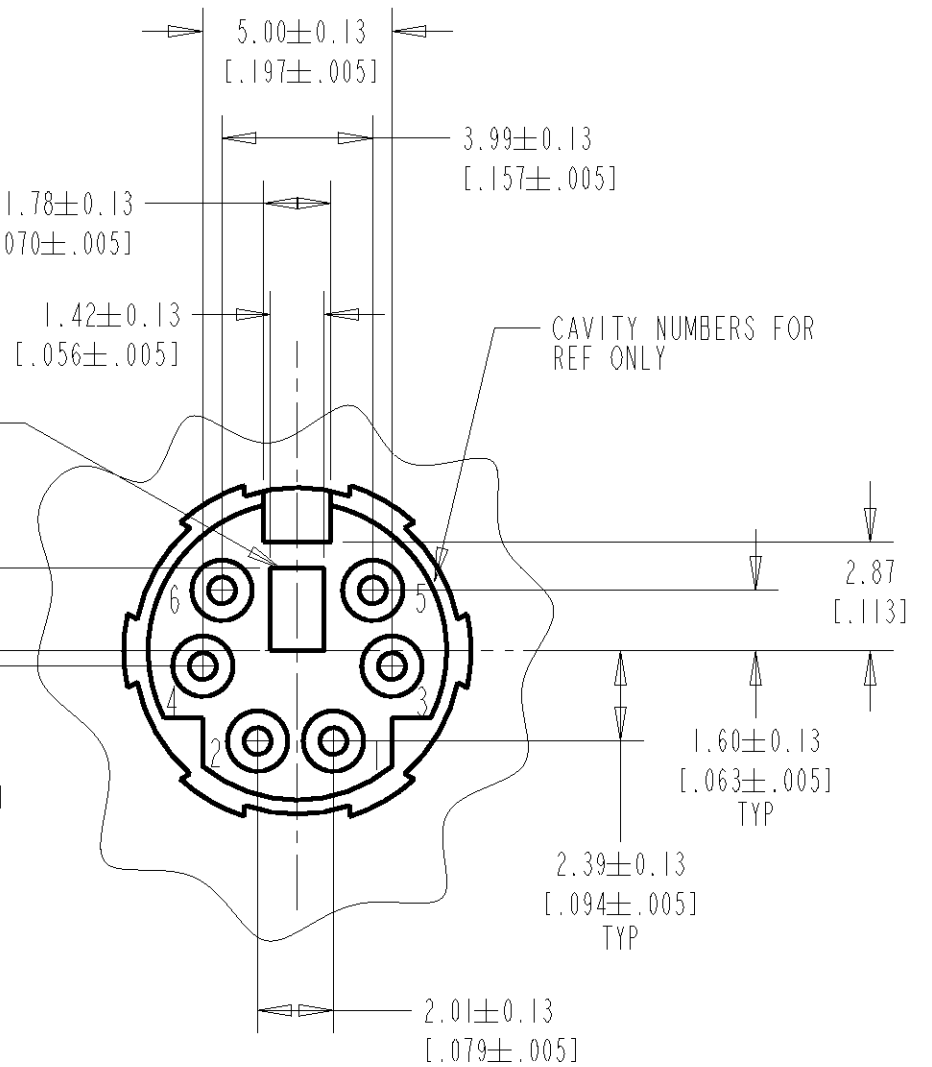


DETAIL D
SCALE 5:1

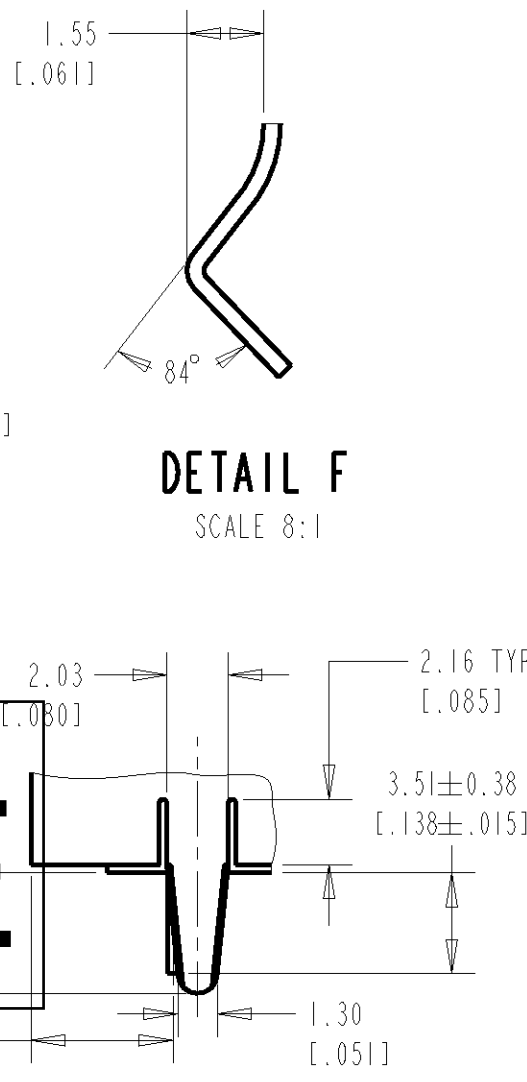



DETAIL E
SCALE 4:1

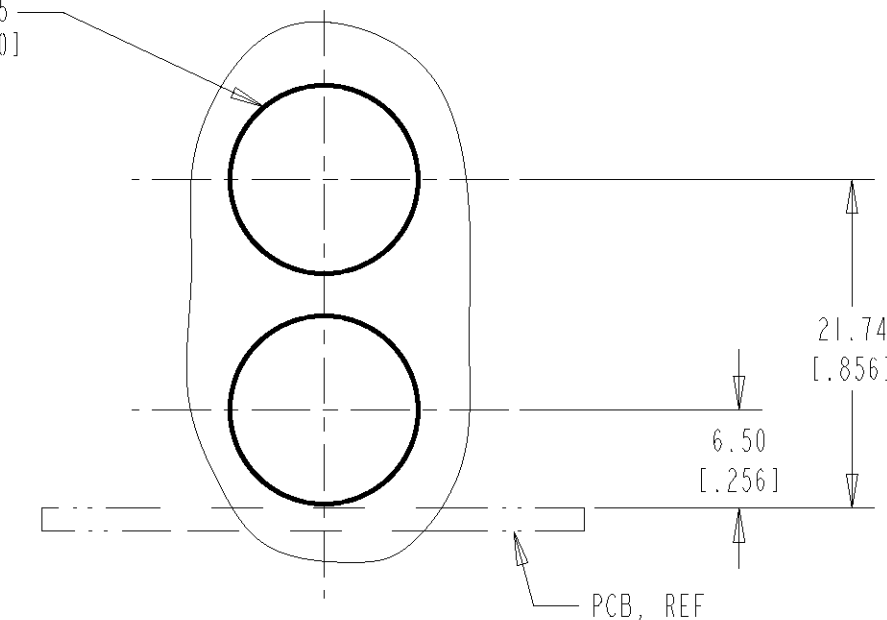


DETAIL F
SCALE 8:1

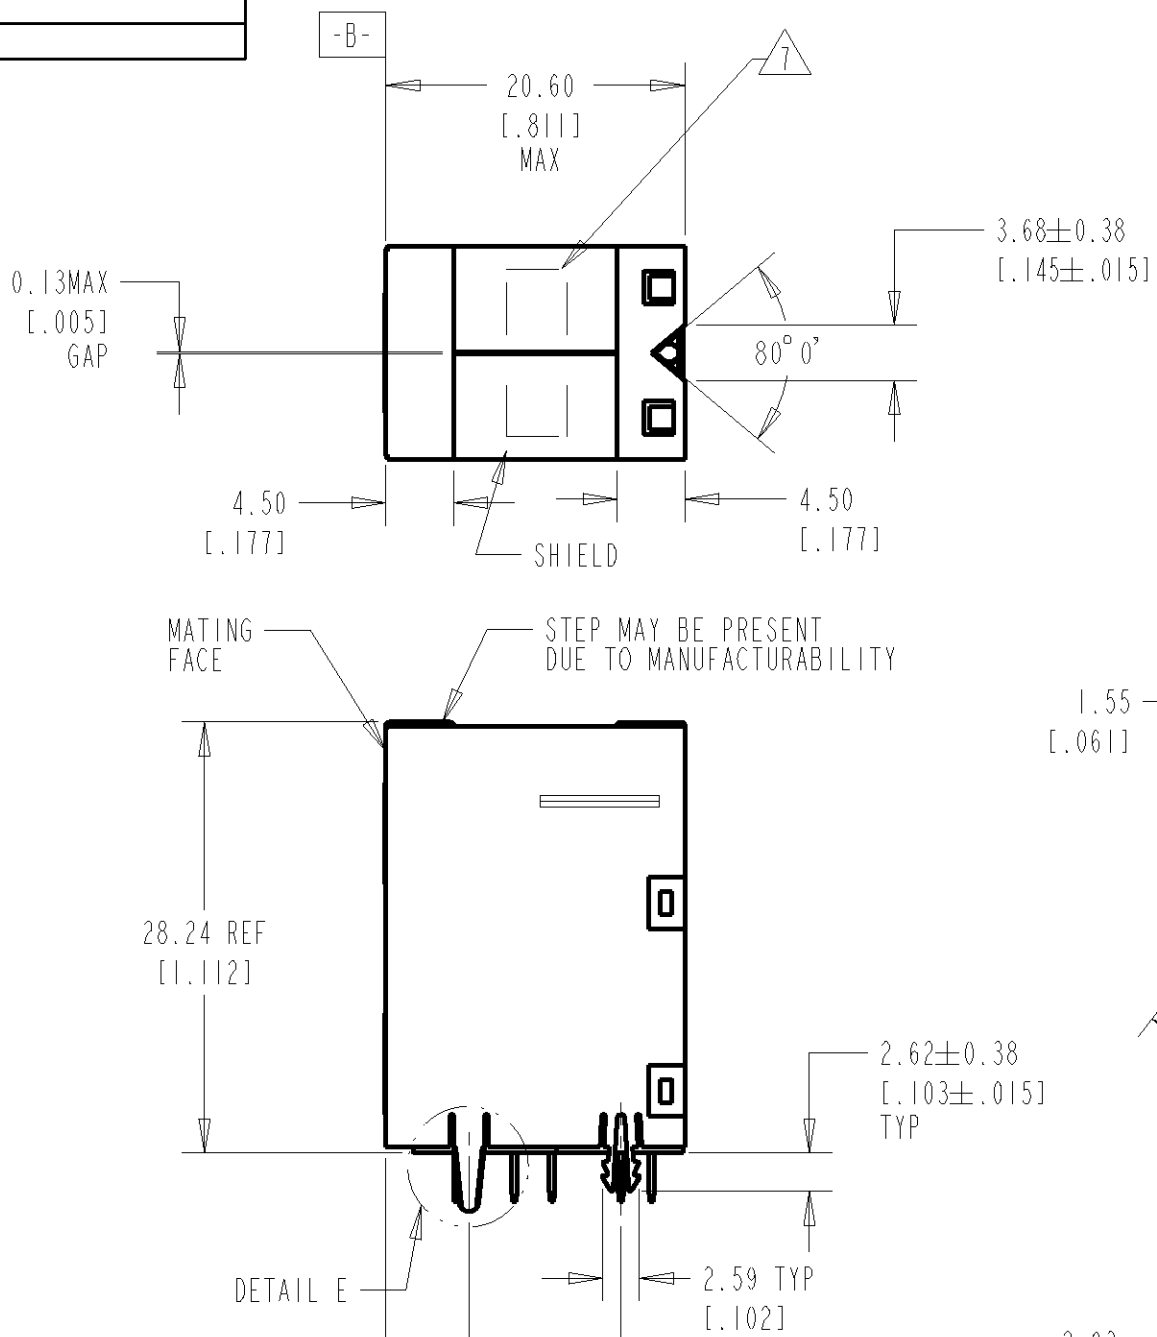

DETAIL G
SCALE 10:1

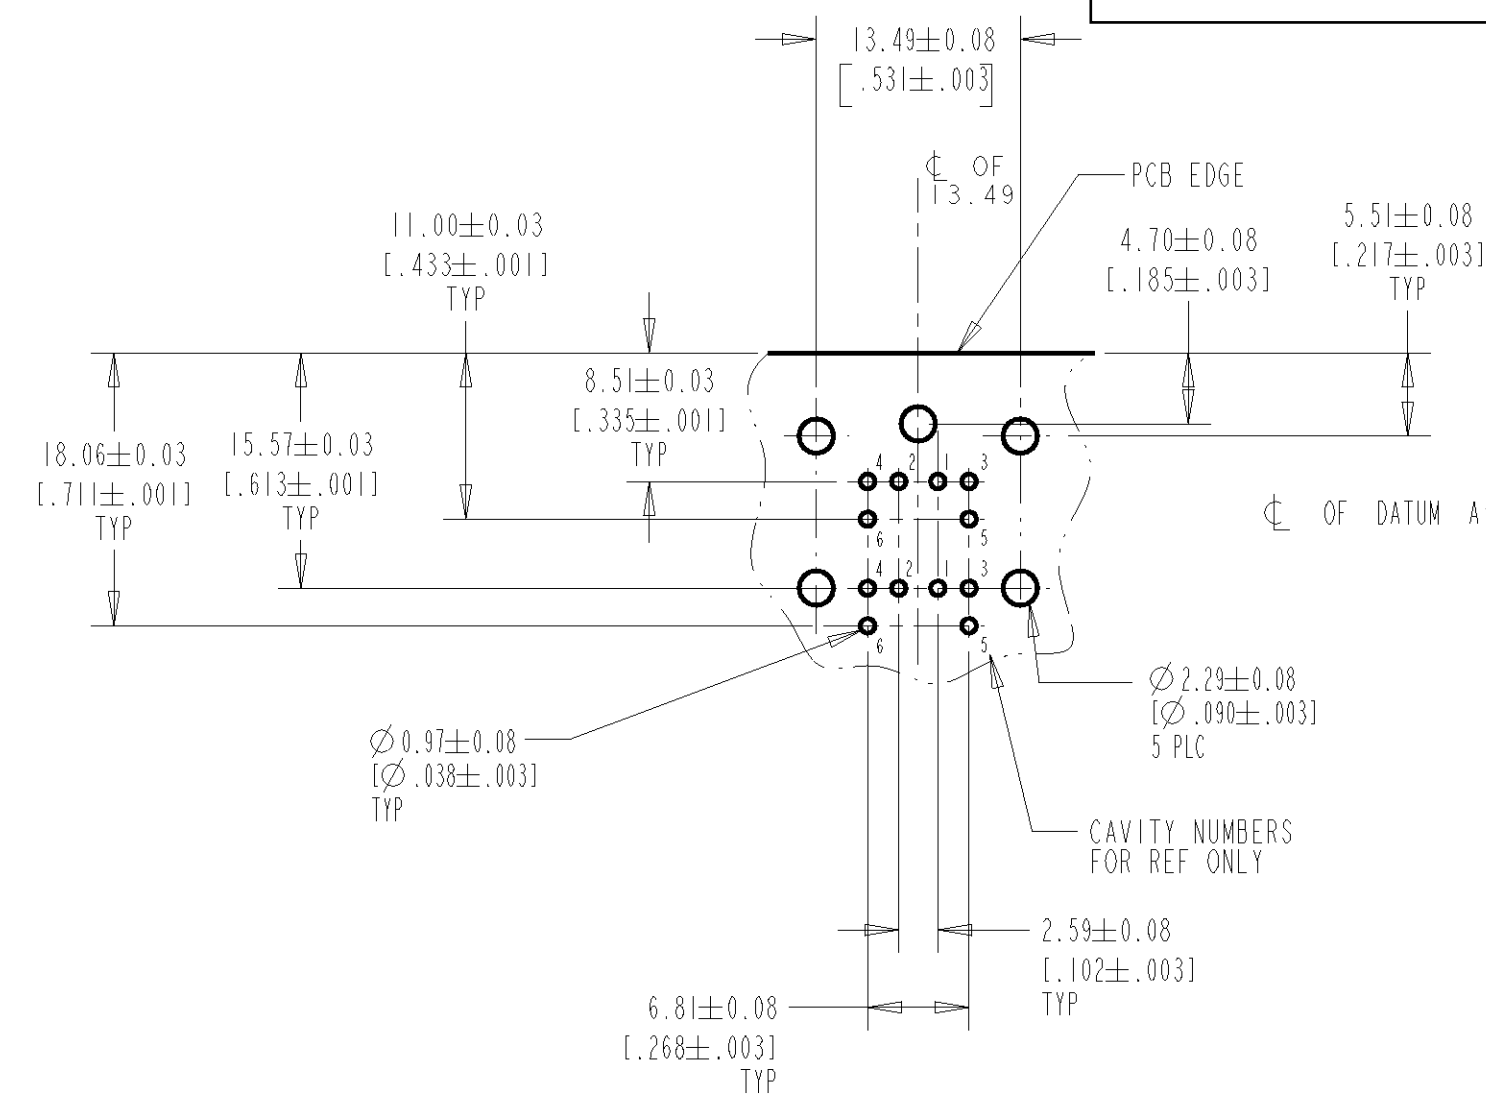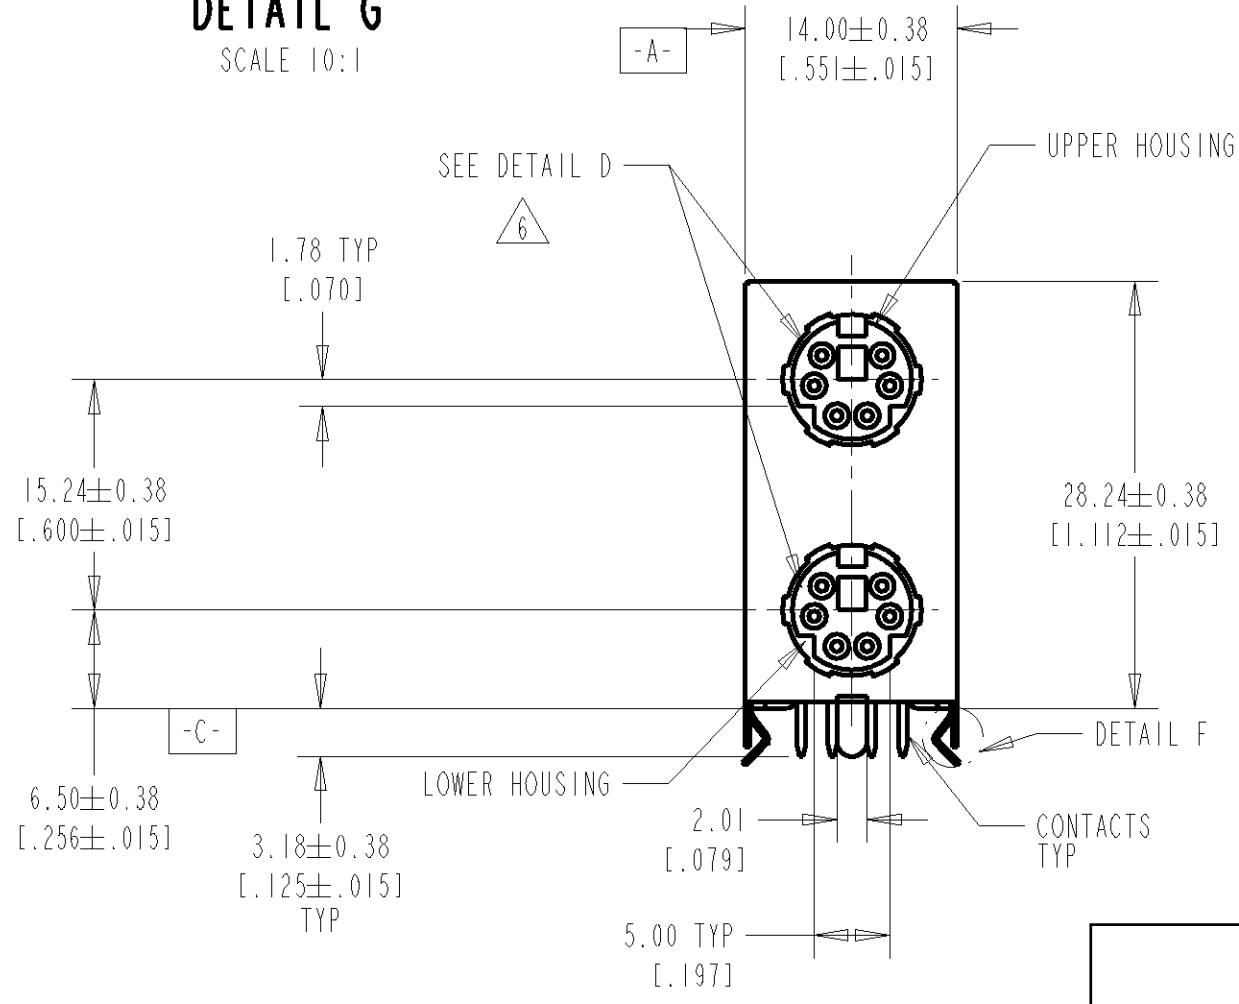

RECOMMENDED PC BOARD LAYOUT
BOTTOM VIEW

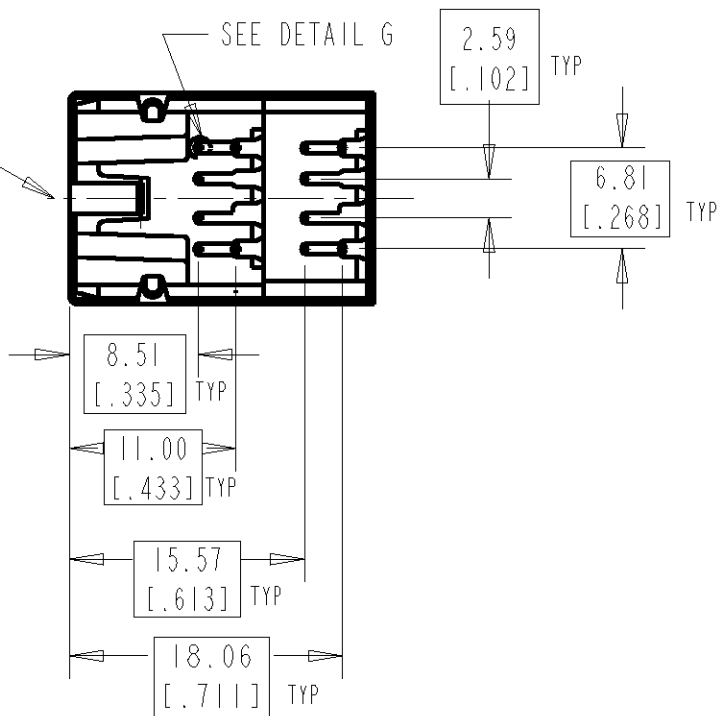

RECOMMENDED PANEL CUTOUT

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN WYLEE	30SEP2004	tyco Electronics		Tyco Electronics Singapore Pte. Ltd.	
DIMENSIONS: mm[INCHES]		CHK SF LEONG		NAME RECEPTACLE ASSEMBLY, FIFTH BOARD MOUNT		SIZE A2	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SF LEONG		6 POSN OVER 6 POSN, RIGHT ANGLE, STACKABLE, MINIATURE CIRCULAR DIN		CAGE CODE 00779	
0 PLC ±0.2		PRODUCT SPEC	-	DRAWING NO		C=5084376	
1 PLC ±0.25		APPLICATION SPEC	-	SCALE		2.1	
2 PLC ±0.30		WEIGHT	-	SHEET		OF	
3 PLC ±0.30		CUSTOMER DRAWING		REV		A	
4 PLC ±0.30							
ANGLES ±3°							
FINISH							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5084376-1](#)