

Incandescent Indicators for Translucent Panel Edge Lighting


for use with MIL-P-7788 Plastic Panels

FOR FRONT MOUNTING IN 15/32" CLEARANCE HOLE



**T-1 3/4
MIDGET
FLANGE BASE**

See lamp ratings
on page J.



271-8430-0111-702

TWO TERMINALS – FULLY INSULATED


These indicators are designed to emit light through a colored filter radially into the plastic plate. A resilient light seal washer (light trap) insures against light loss at the front of the panel.

MATERIALS AND FINISHES

- **Mounting Bushing:** Brass, cadmium plated with yellow iridescent chromate finish.
- **Hardware:** Internal-tooth lockwasher and hex mounting nut— Steel, cadmium plated with yellow iridescent chromate finish.
- **Terminals:** Solder — Brass, hot-tinned, with elongated slots.

Anti-rotation Notch on face of flange prevents rotation of unit while nut is being tightened.

Note: On all units, the shank of the lens holder is crimped in 3 evenly spaced places to secure the lamp.

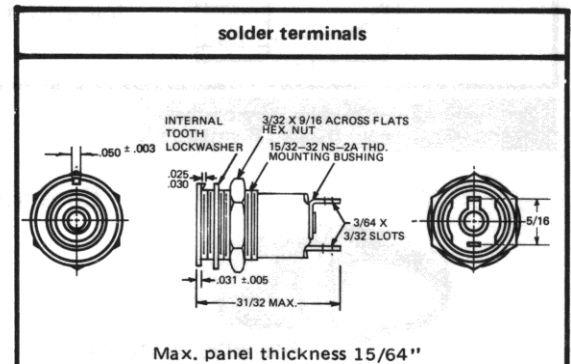


Max. panel thickness 15/64"

HOLDER (filter cap) ASSEMBLY PART NUMBERS

BASE PART NUMBERS

271-8430-702

|  | Part number | Top color | Filter color | Light seal washer-opaque | COMPLETE ASSEMBLY PART NUMBERS |
|---|-------------|-----------|--------------|--------------------------|--------------------------------|
| | 271-0121 | Black | Green | Black | 271-8430-0121-702 |
| | 271-0131 | Black | Amber | Black | 271-8430-0131-702 |
| | 271-0222 | Gray | Green | Gray | 271-8430-0222-702 |
| | 271-0232 | Gray | Amber | Gray | 271-8430-0232-702 |

Part numbers shown in gray are normally in inventory at your Dialight Distributor.

Order complete with lamp to be assured of receiving the indicator light and correct lamp together for immediate use.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[271-3171](#) [271-8430-3111-702](#) [271-8430-702](#) [271-8430-0171-702](#) [271-8430-0272-702](#) [271-8430-700](#) [271-3111](#)
[271-0131](#) [271-0111](#) [271-0121](#) [271-8430-0212-702](#) [271-8430-3171-702](#) [271-0212](#) [271-0272](#)