

SPECIFICATIONS:

CONTACT RATING: SILVER, 3AG
125VAC OR 28VDC (RESISTIVE)

INITIAL CONTACT RESISTANCE:
20 MILLIOHMS MAX.

INSULATION RESISTANCE: 1,000
MEGOHMS MINIMUM @ 500VDC.

DIELECTRIC STRENGTH: 500
VOLTS RMS AT SEA LEVEL.






MTG HARDWARE: 1 LOCKWASHER
AND 1 HEX NUT.

*ROCKER COLORS

0-BLACK
2-RED
6-BLUE
9-WHITE

1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER
D.RENAUD/D.SINISI
9-1437595-6

2 SUPERCEDED PARTS
7-1437595-7, 8-1437595-0, 8-1437595-3, 8-1437595-4, 9-1437595-1,
9-1437595-3, 9-1437595-6, 9-1437595-8.

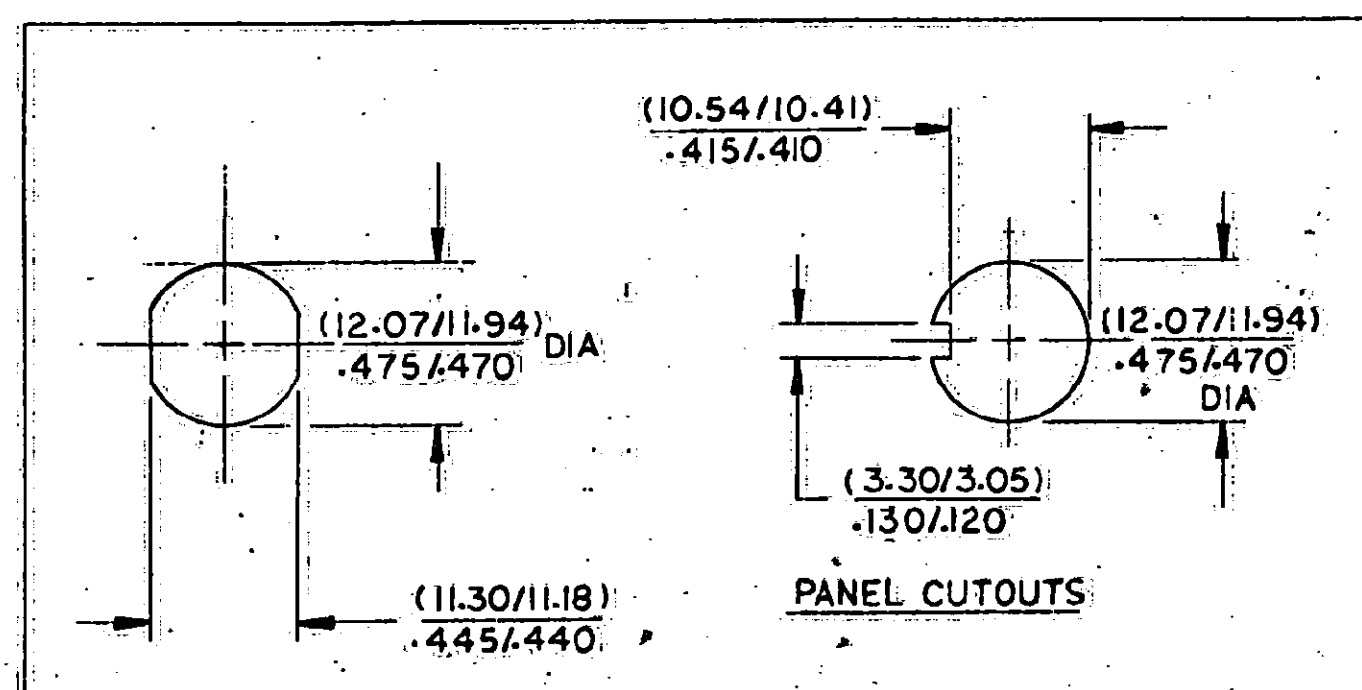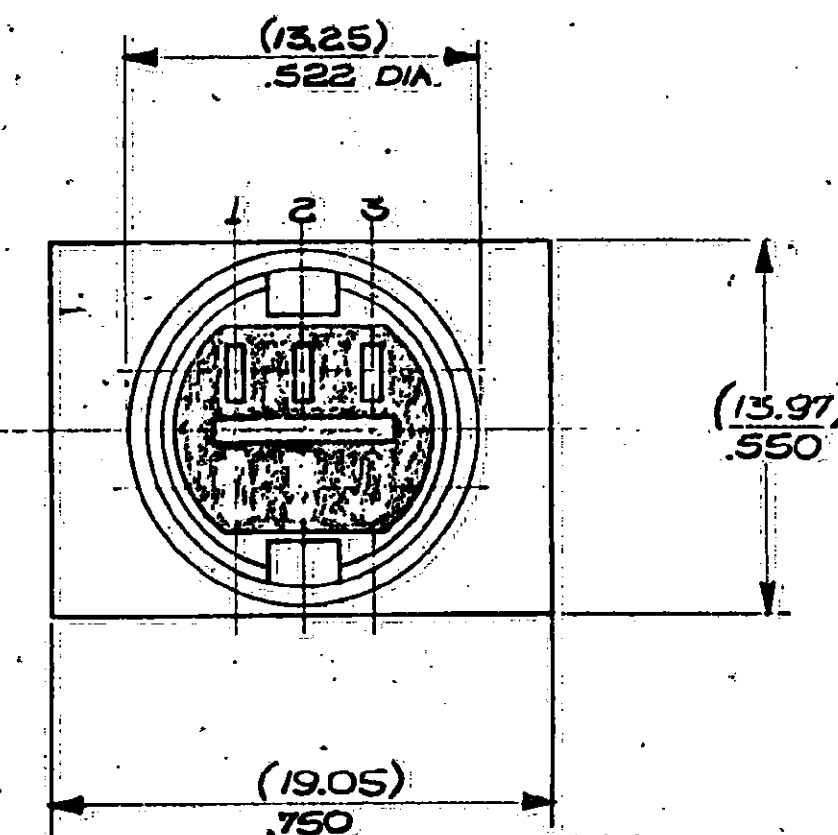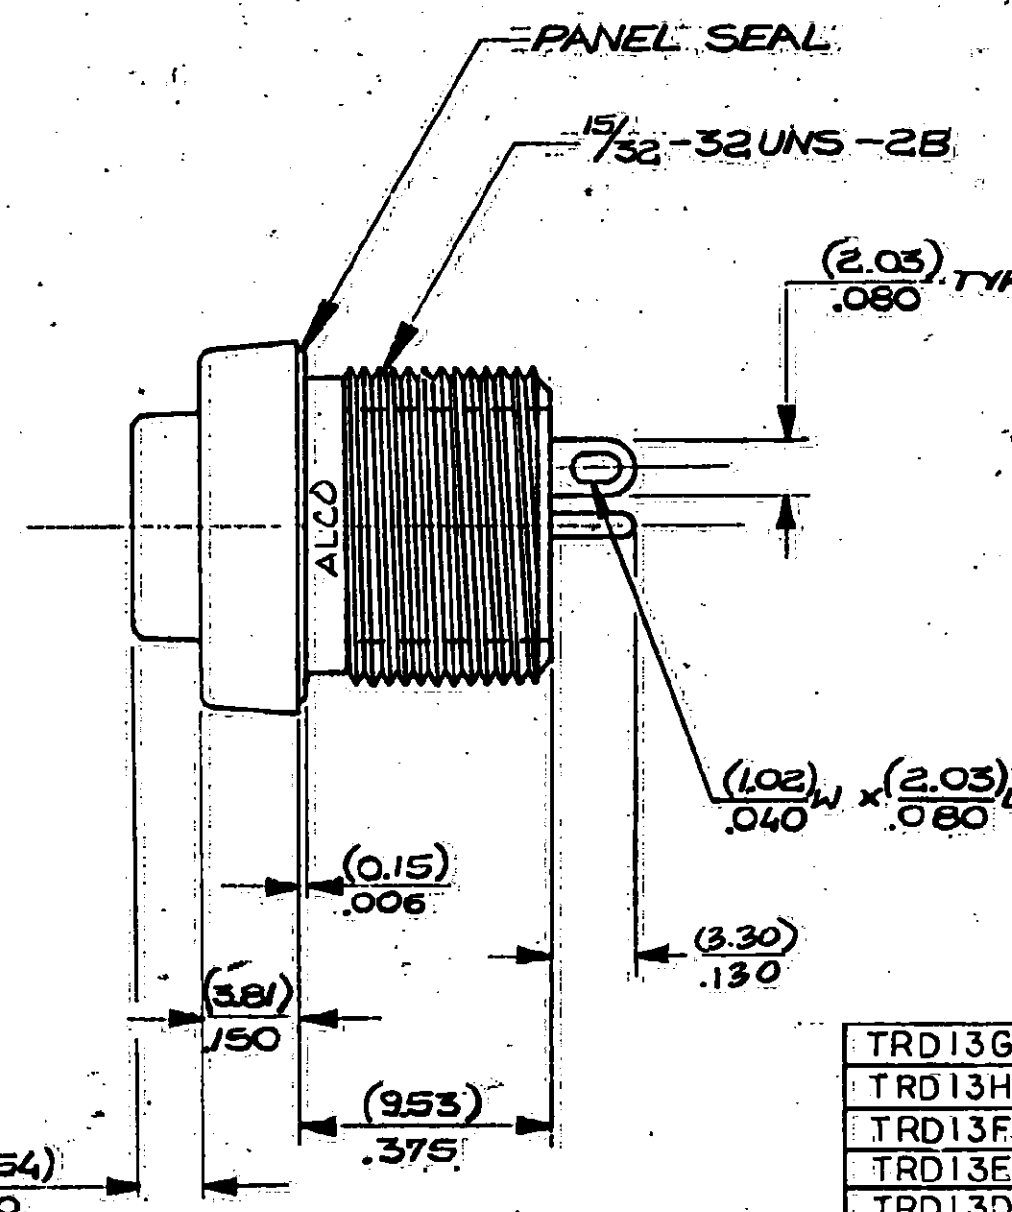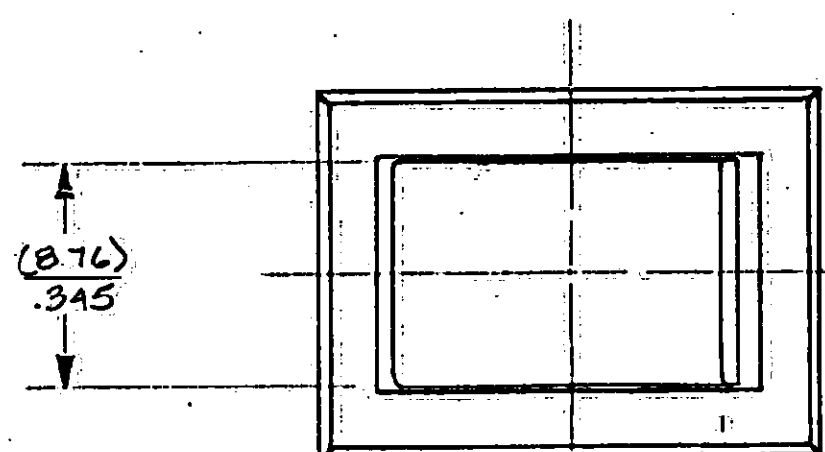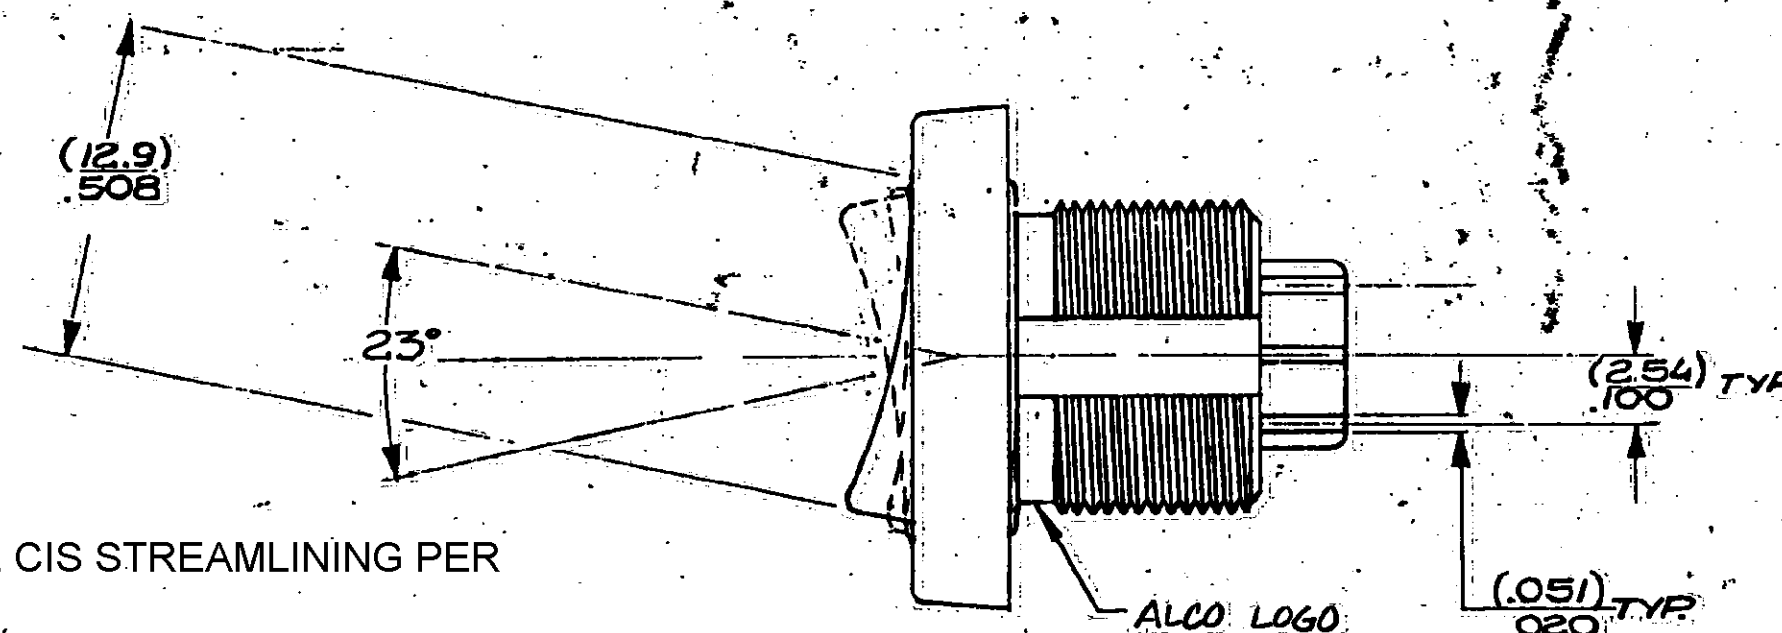

TRD13G-1-*	(2-3)	OFF	(2-1)
TRD13H-1-*	2-3	OFF	(2-1)
TRD13F-1-*	2-3	NONE	(2-1)
TRD13E-1-*	2-3	OFF	2-1
TRD13D-1-*	2-3	NONE	2-1
SWITCH ACTION	ALCO LOGO 1 2 3	ALCO LOGO 1 2 3	ALCO LOGO 1 2 3

() - INDICATES A MOMENTARY CIRCUIT CLOSURE.

TERMINALS CONNECTED WHEN TOGGLE IS IN POSITION SHOWN.
NOTE: TERMINAL DESIGNATION NUMBERS ARE FOR REFERENCE
ONLY AND DO NOT APPEAR ON SWITCHES.

(MM) INCH TOL: (.025) .010 ±3° ANGLE

ECO-09-08 FEB 10		HMR		DATE		APPROV		DIMENSIONING AND TOLERANCING PER ANSI Y 14.5		INSPECT PER ALCO QAS 100		SYMBOL		AQL		CHK		APPR		MATERIAL		FINISH		DO NOT SCALE DRAWING									
A1		A		1		REV		ECO-09-08 FEB 10		HMR		DATE		APPROV		DIMENSIONING AND TOLERANCING PER ANSI Y 14.5		INSPECT PER ALCO QAS 100		SYMBOL		AQL		CHK		APPR		MATERIAL		FINISH		DO NOT SCALE DRAWING	
A1		A		1		REV		ECO-09-08 FEB 10		HMR		DATE		APPROV		DIMENSIONING AND TOLERANCING PER ANSI Y 14.5		INSPECT PER ALCO QAS 100		SYMBOL		AQL		CHK		APPR		MATERIAL		FINISH		DO NOT SCALE DRAWING	

AUGAT ALCO		ELECTRONIC PRODUCTS, Inc. North Andover, MA 01845	
TITLE: OUTLINE - ROCKER SWITCH, TRD SPDT (TRD 13-I SERIES)		SCALE: 4:1	
SHEET: 1 OF 1		REV: A1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1437595-9](#)