
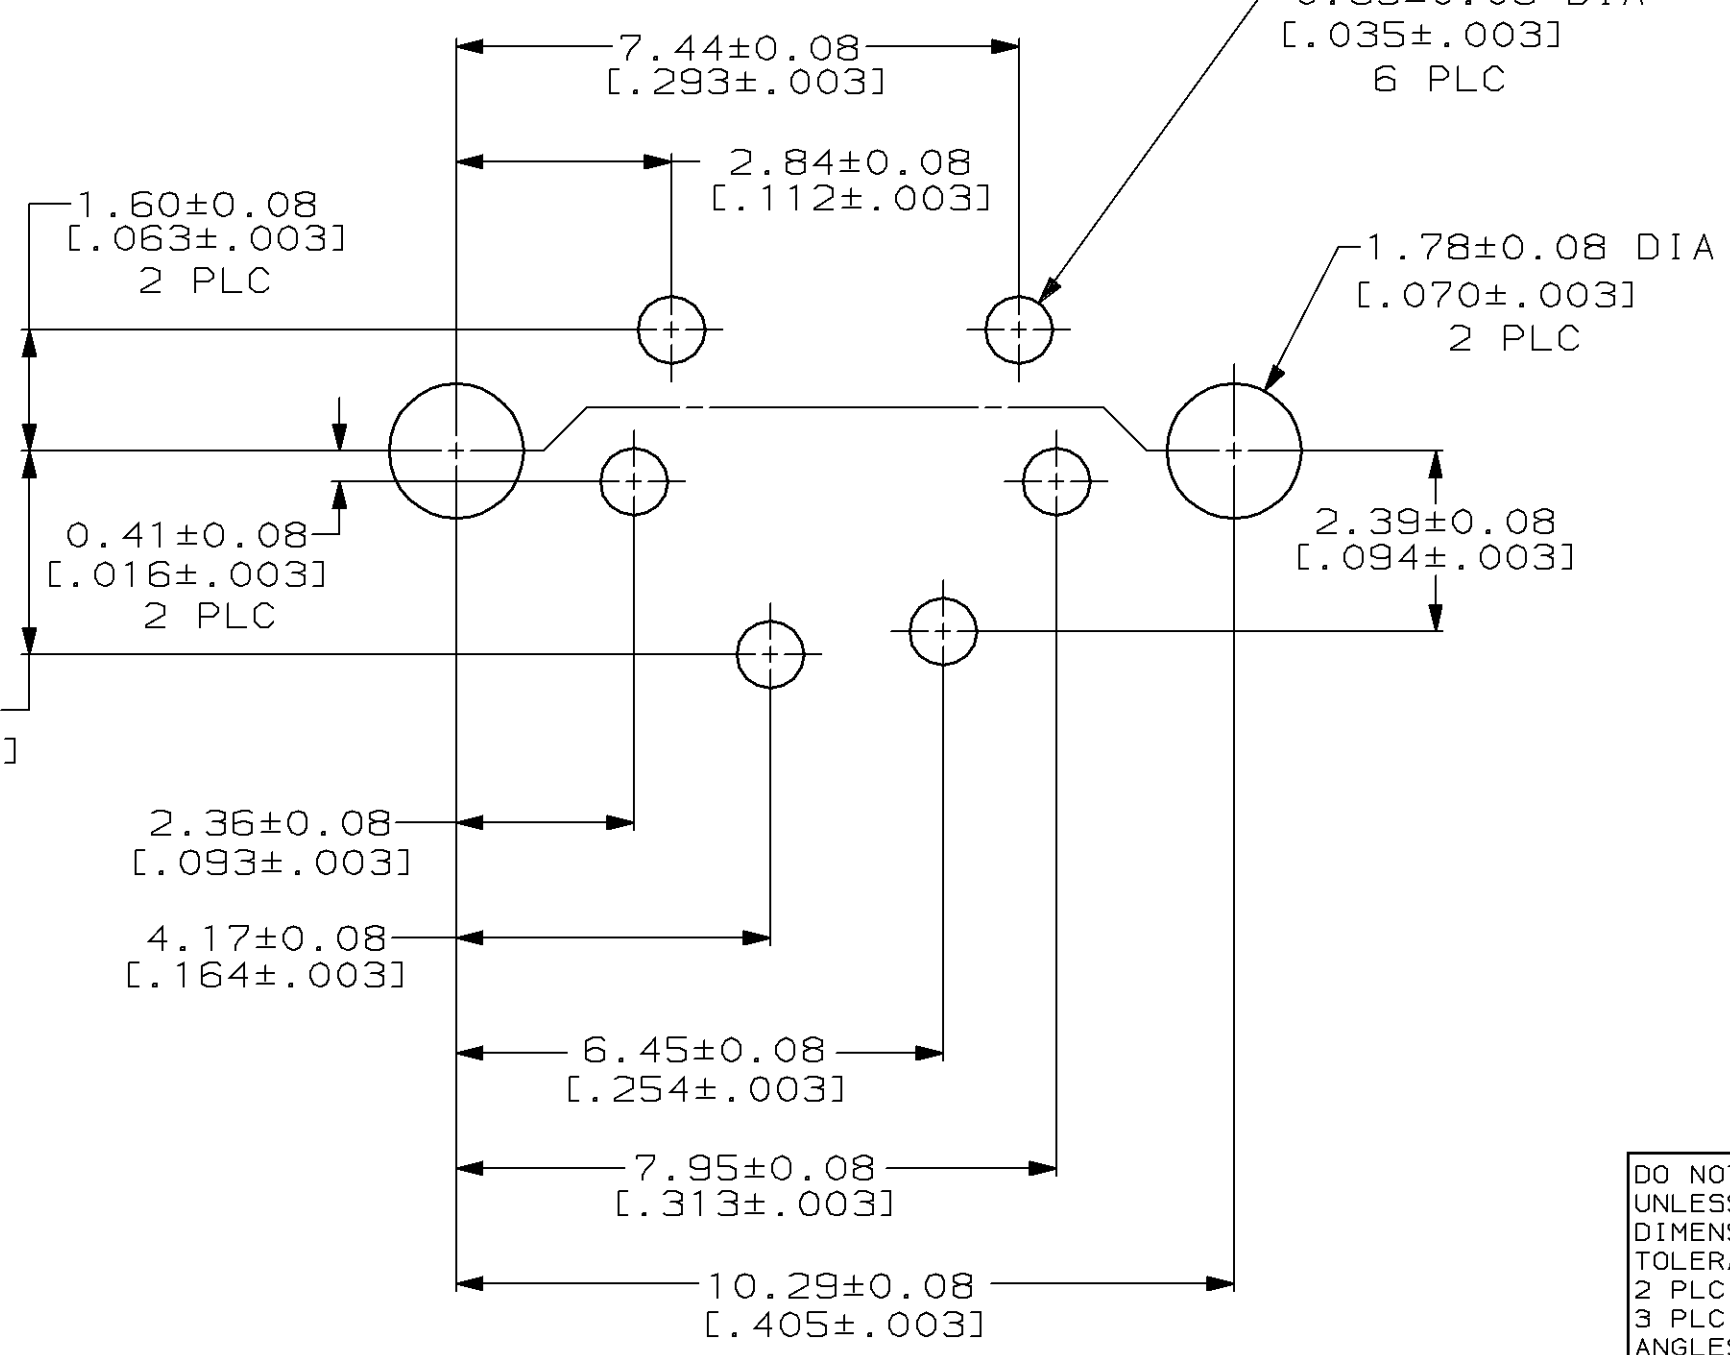
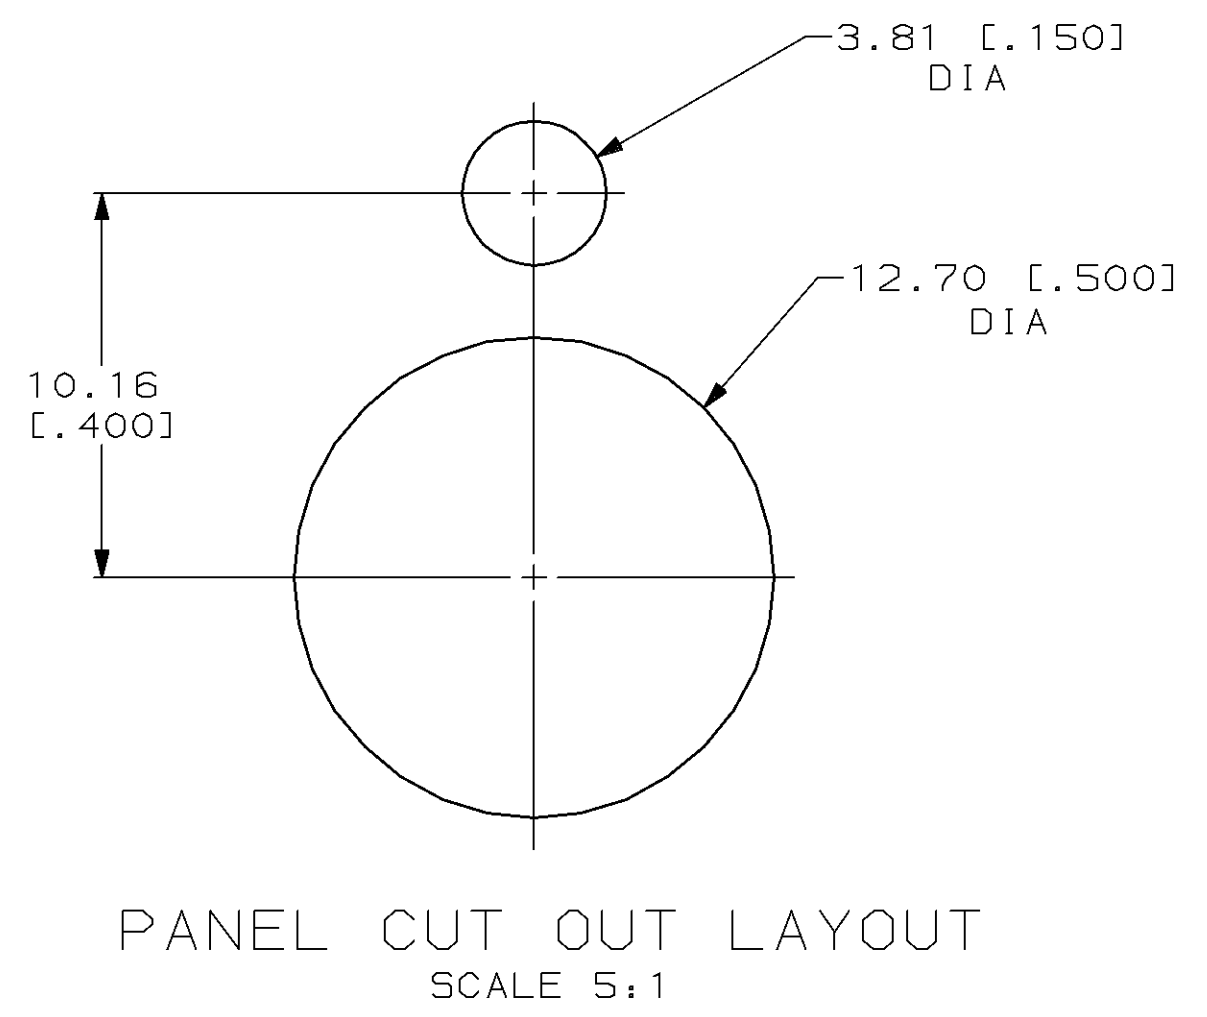
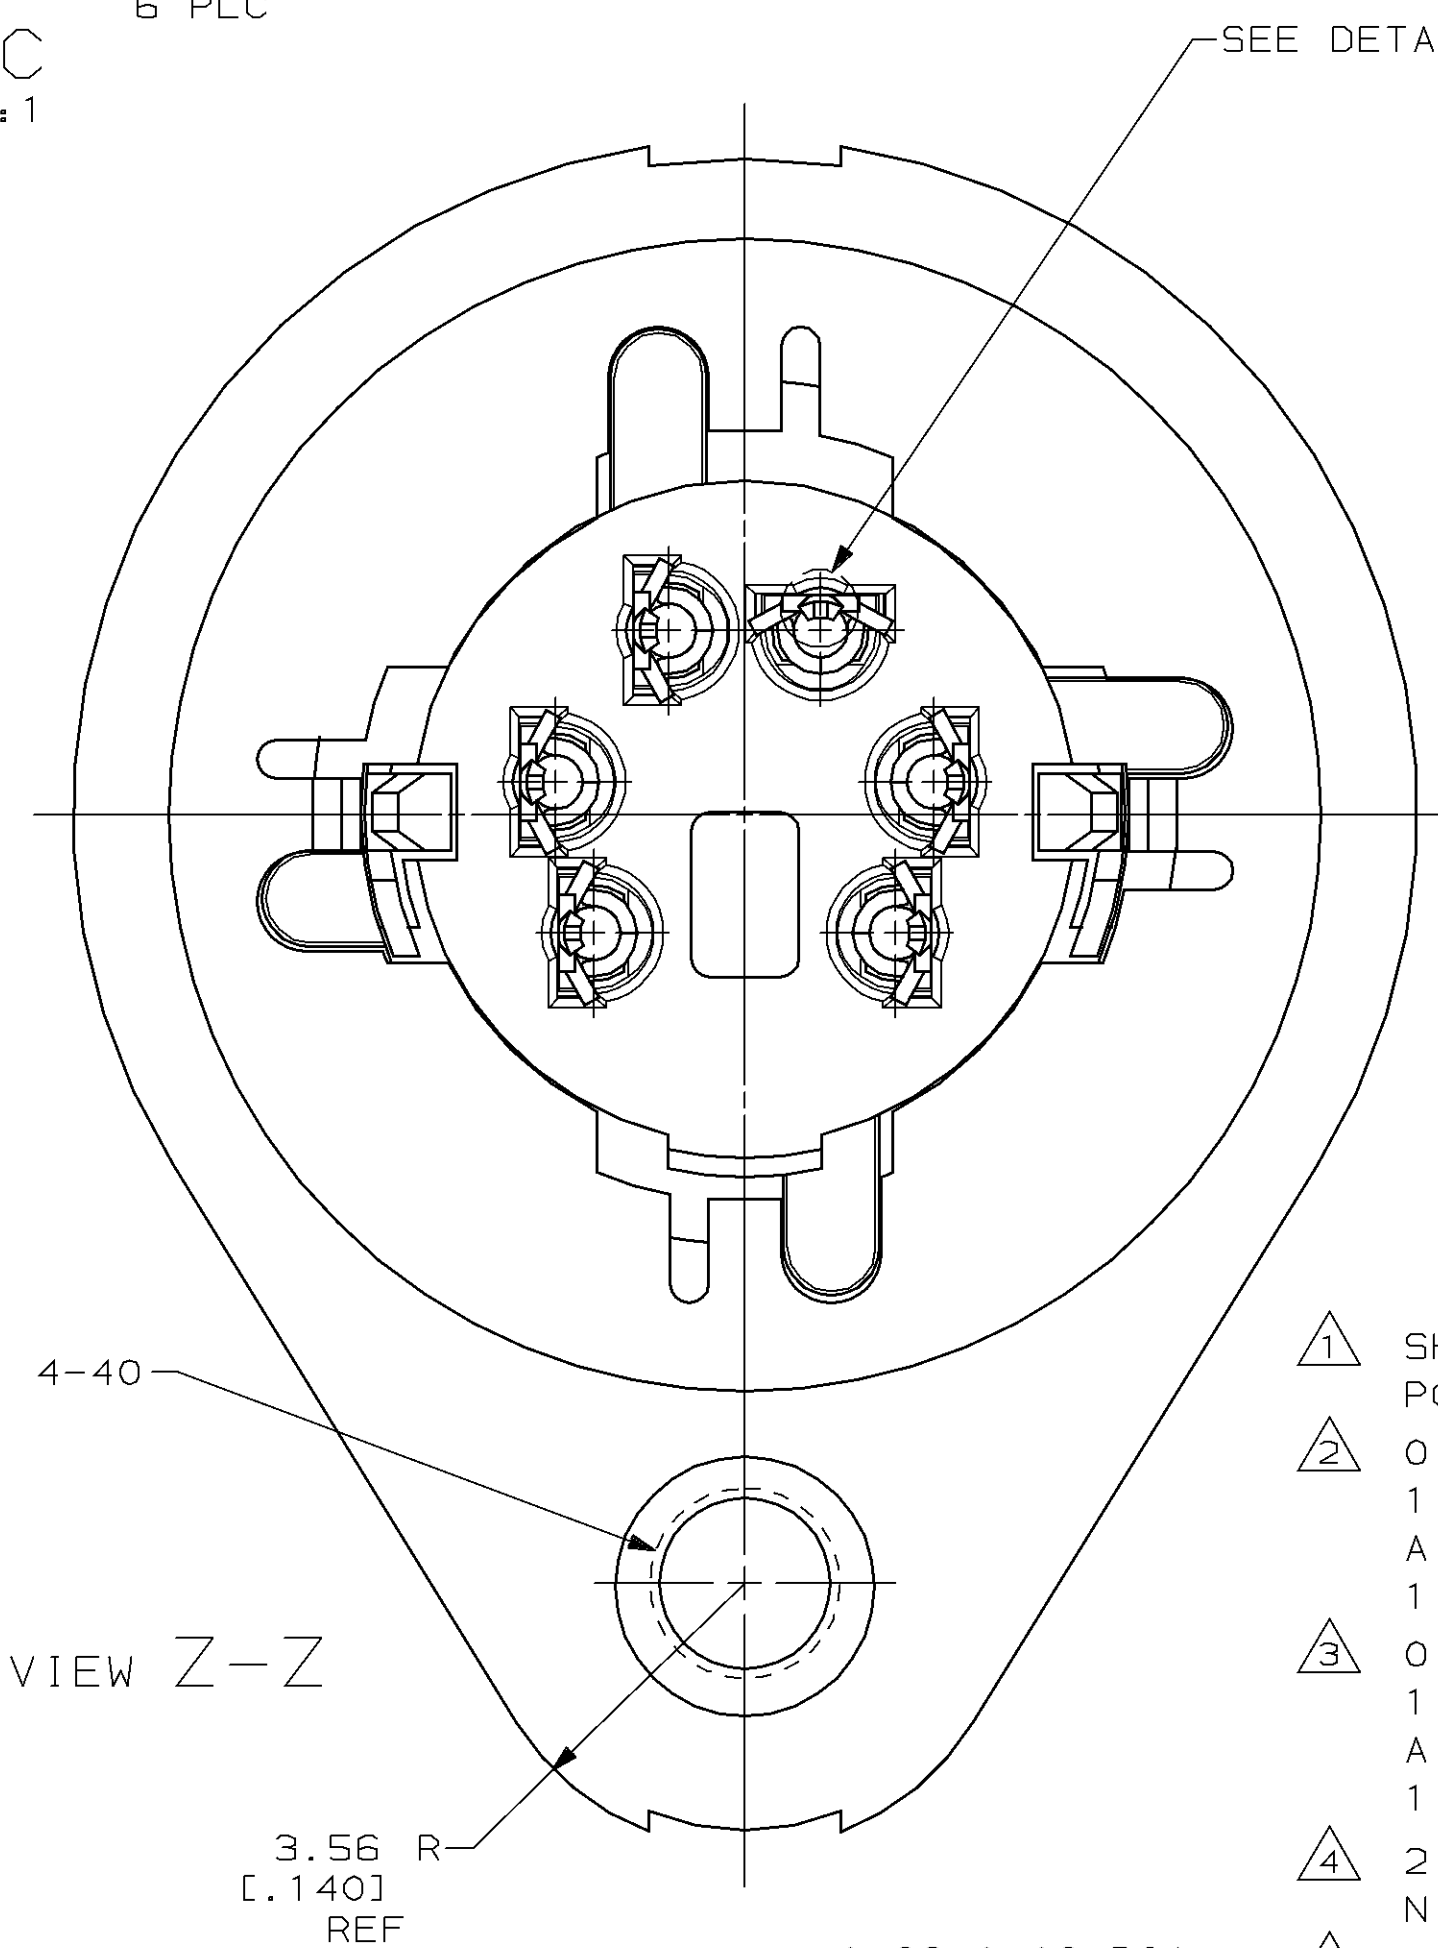
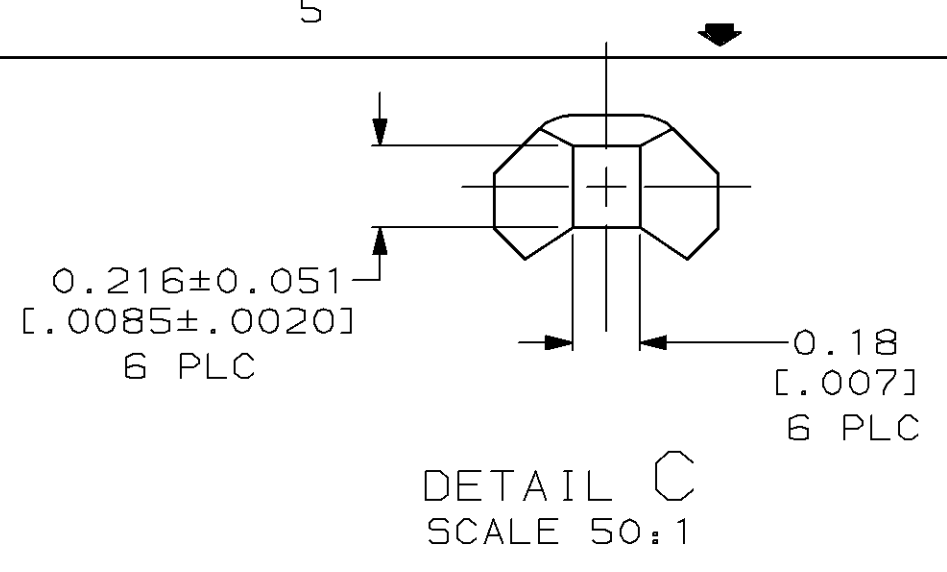
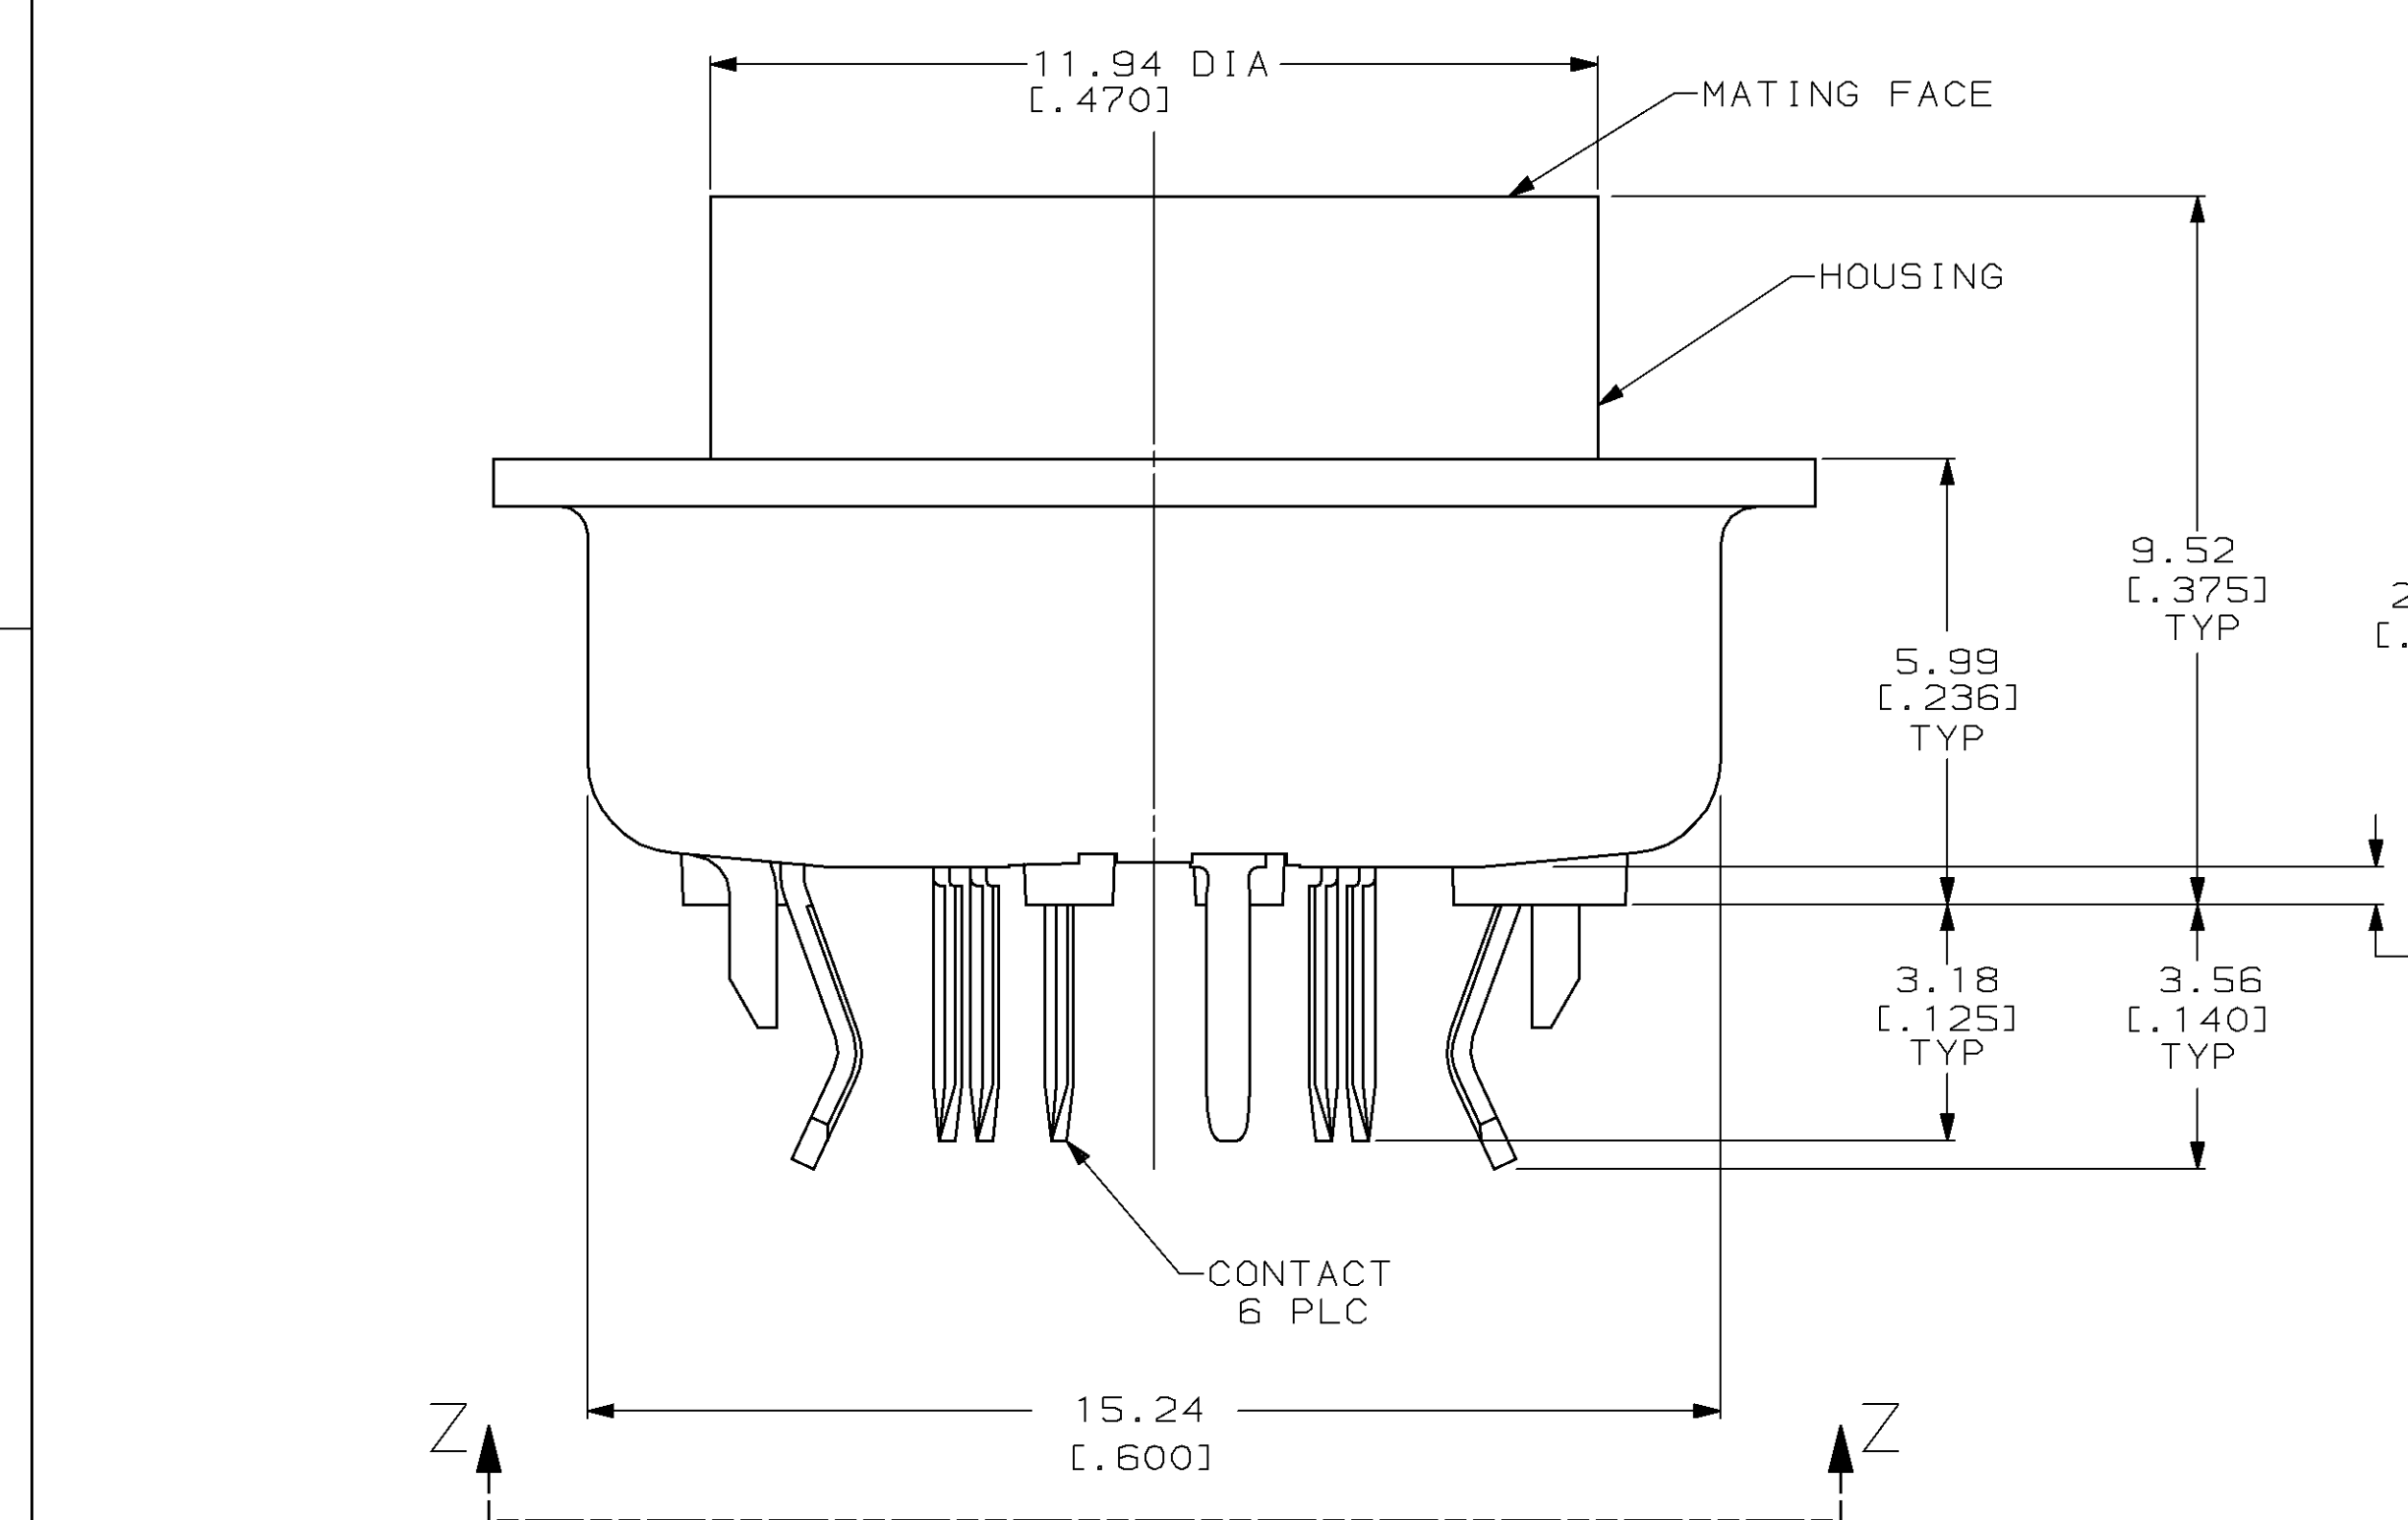


LOC		DIST		REVISIONS						
BD	26	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD		
					O	RLSE PER NPR 3410	4-1-91	-		
						WAS 91-4264-2-1 & -2				
					A	REVISED PER ECN BD5094	08/21/91	-		
					B	REVISED PER ECN BD5035	09/20/91	RW		
					C	REVISED PER ECN BD5992	02/28/92	JS		
					D	OBS -1 PER EC 0020-1537-93	03/31/94	RB		

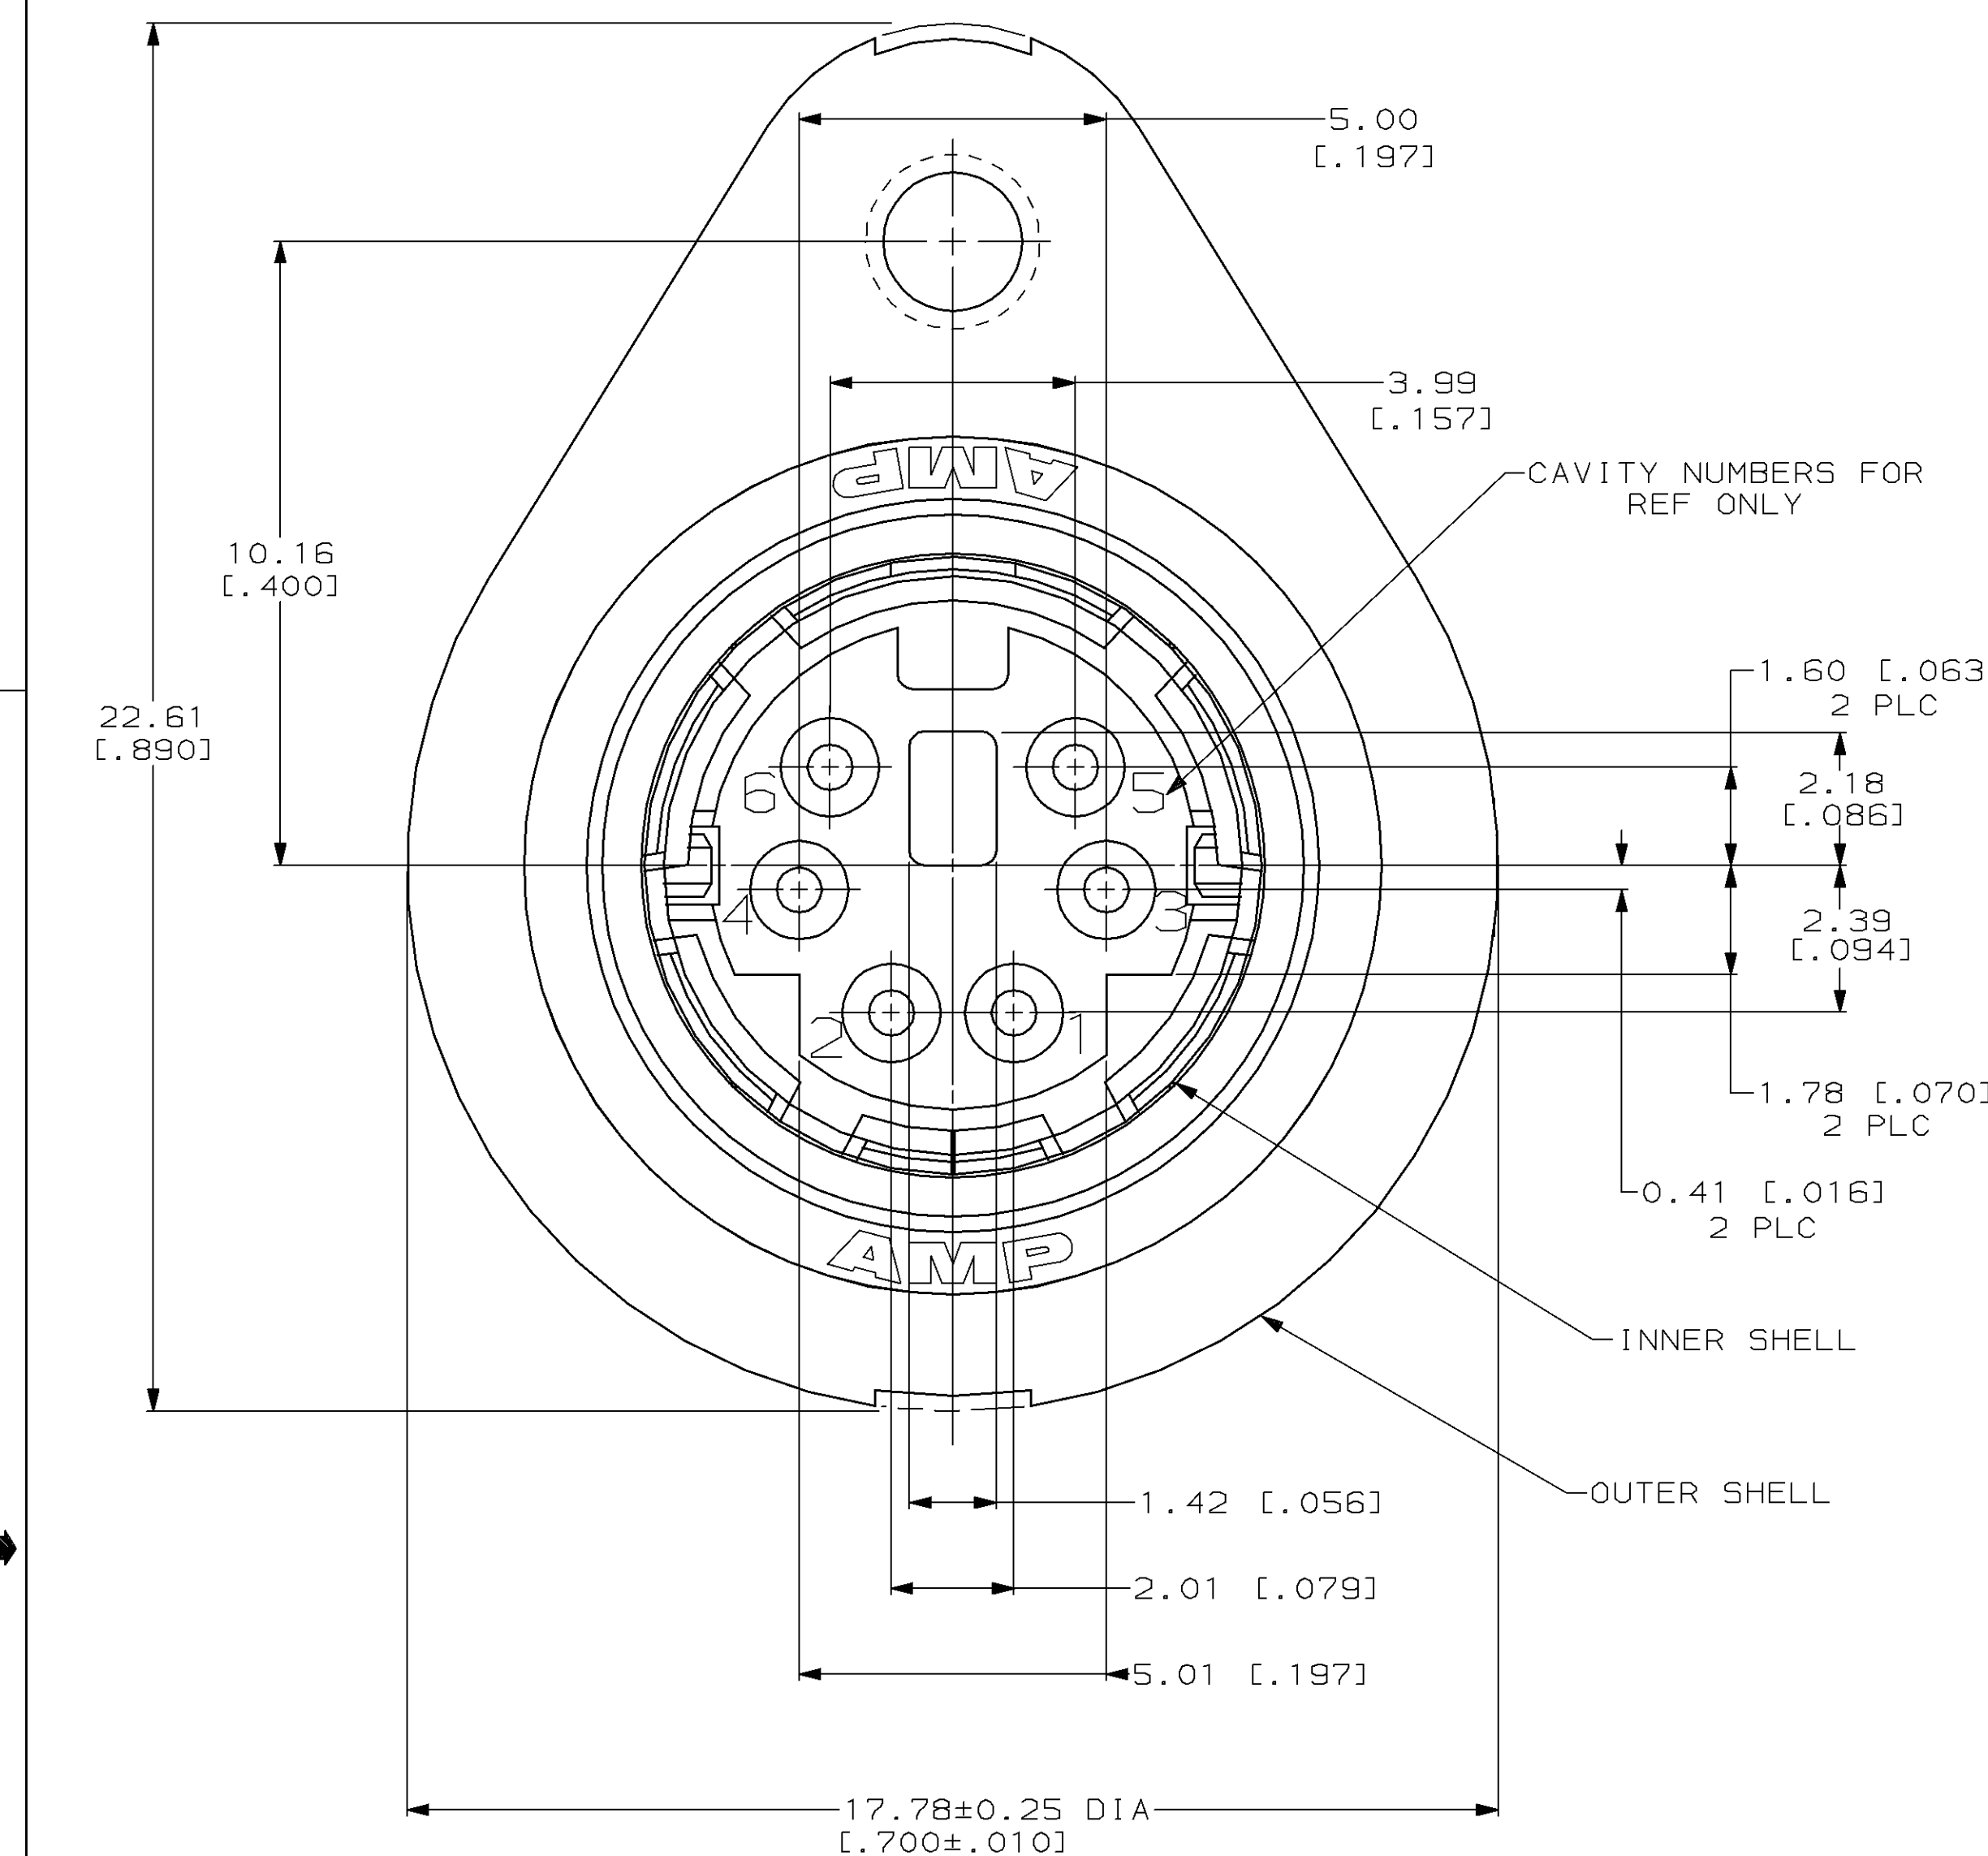

- 1 SHELLS: BRASS; CONTACTS: PHOSPHOR BRONZE; HOUSING: POLYESTER, UL 94V-0 RATED, BLACK.
- 2 0.76 μ m [.000030] MIN GOLD ON MATING END FOR A LENGTH OF 1.37[.054] MIN ON INSIDE, 2.54 μ m [.000100] MIN TIN-LEAD FOR A LENGTH OF 3.30[.130] MIN FROM OPPOSITE END, ALL OVER 1.27 μ m [.000050] MIN NICKEL.
- 3 0.38 μ m [.000015] MIN GOLD ON MATING END FOR A LENGTH OF 1.37[.054] MIN ON INSIDE, 2.54 μ m [.000100] MIN TIN-LEAD FOR A LENGTH OF 3.30[.130] MIN FROM OPPOSITE END, ALL OVER 1.27 μ m [.000050] MIN NICKEL.
- 4 2.54 μ m [.000100] MIN TIN-LEAD OVER 1.27 μ m [.000050] MIN NICKEL.
- 5 GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290, COPPER PLATING PER MIL-C-14550.
6. RECEPTACLE ASSEMBLY MATES WITH 6 PIN, 8.99±0.10[.354±.004] DIAMETER PLUG.
- 7 3.81 μ m [.000150] MIN TIN-LEAD OVER 2.54 μ m [.000100] MIN COPPER.

OBSOLETE		750730-2
		750730-1
	CONTACT FINISH	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.13 [.005] 3 PLC DEC ± . ANGLES ± -		DR 4-1-91 H MOLL	AMP INCORPORATED Harrisburg, Pa. 17105
MATERIAL		CHK 4-4-91 R. STONE	
FINISH CONTACTS: SEE TABLE INNER SHELL: OUTER SHELL:		APPD 4-5-91 R. WHYNE	
		APPD 4-5-91 J. FULPONI	
APPLICATION SPEC -		PRODUCT SPEC -	NAME RECEPTACLE ASSEMBLY, 6 POSITION, LOW FLANGE, 12 O'CLOCK LOBE, SHIELDED, VERTICAL MOUNT, MINIATURE CIRCULAR DIN
WEIGHT -			
SIZE D	CAGE CODE 00779	DRAWING NO 750730	
SCALE 10:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[750730-2](#)