


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00		H	REVISED PER ECO-06-028338	11/DEC/06	ZMR
						EDB

D

C

B

A

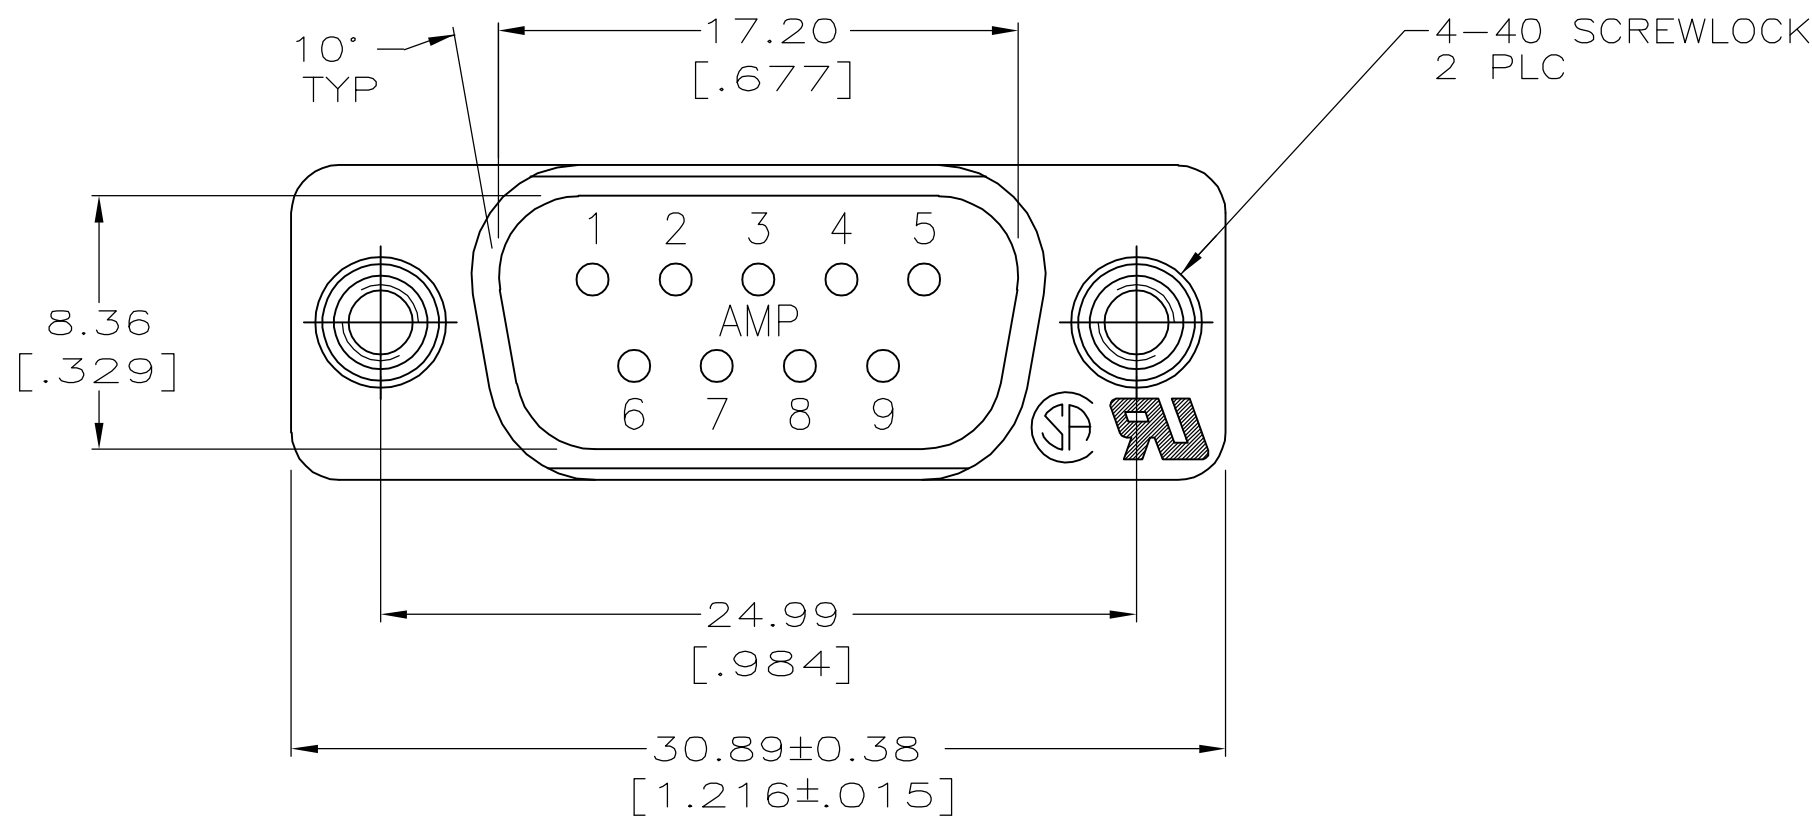

- 1 HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACTS: BRASS SCREWLOCK: BRASS
- 2 GOLD PLATED FOR LENGTH OF 3.81 [.150] MIN FROM MATING END, GOLD FLASH IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 3 GOLD PLATED FOR LENGTH OF 3.81 [.150] MIN FROM MATING END, 0.76µm [.000030] MIN GOLD IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL. -OR- GOLD FLASH OVER PALLADIUM NICKEL FOR A LENGTH OF 3.81 [.150] MIN FROM MATING END, 0.76µm [.000030] MIN PALLADIUM NICKEL IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 4 1.27µm [.000050] MIN NICKEL OVER COPPER FLASH.




D

C

745071

B

A

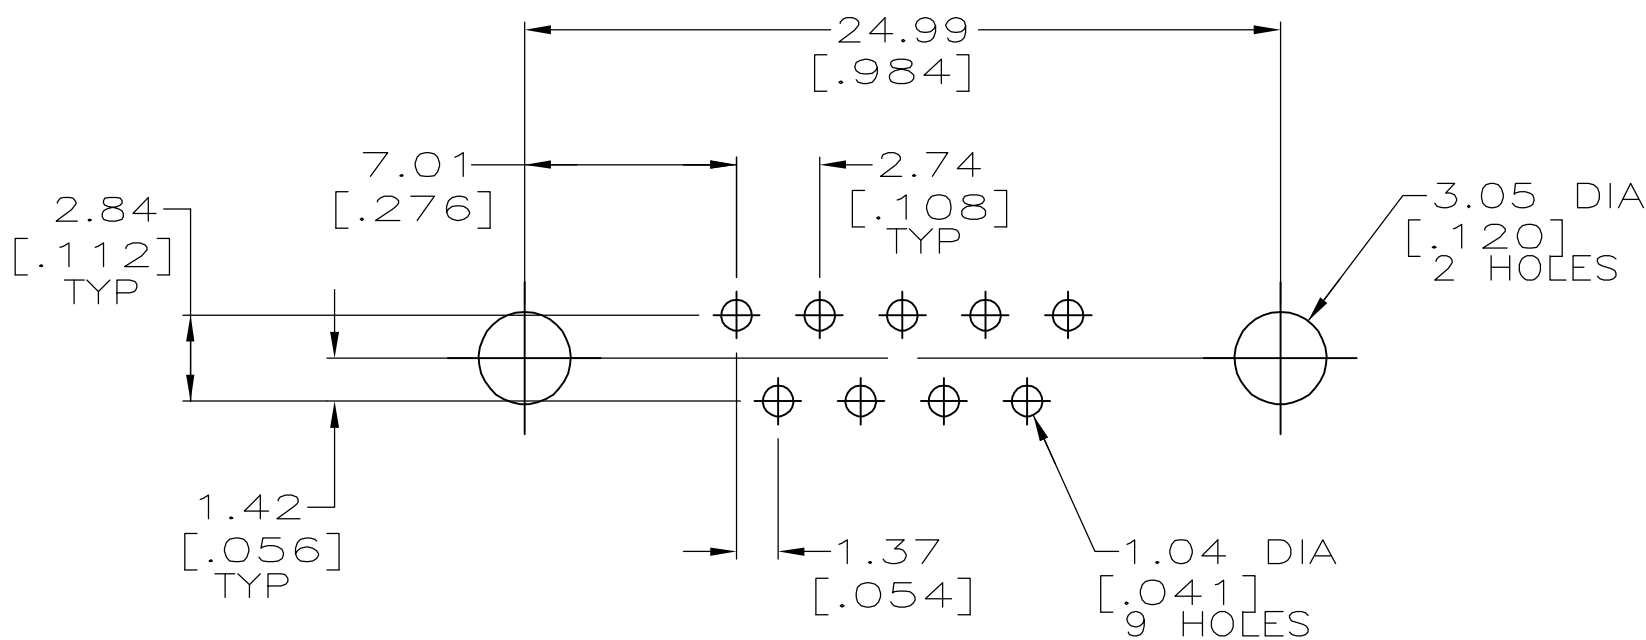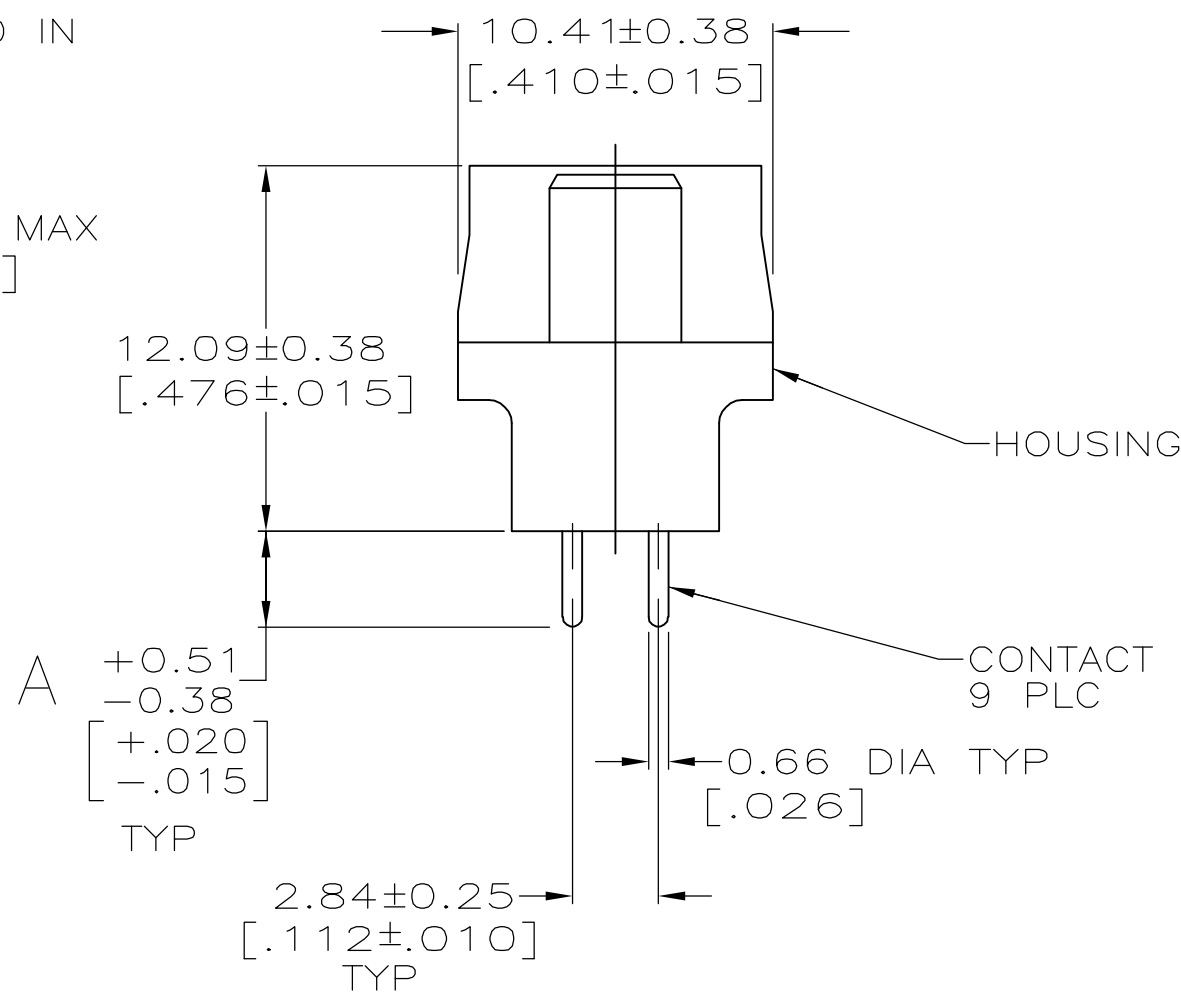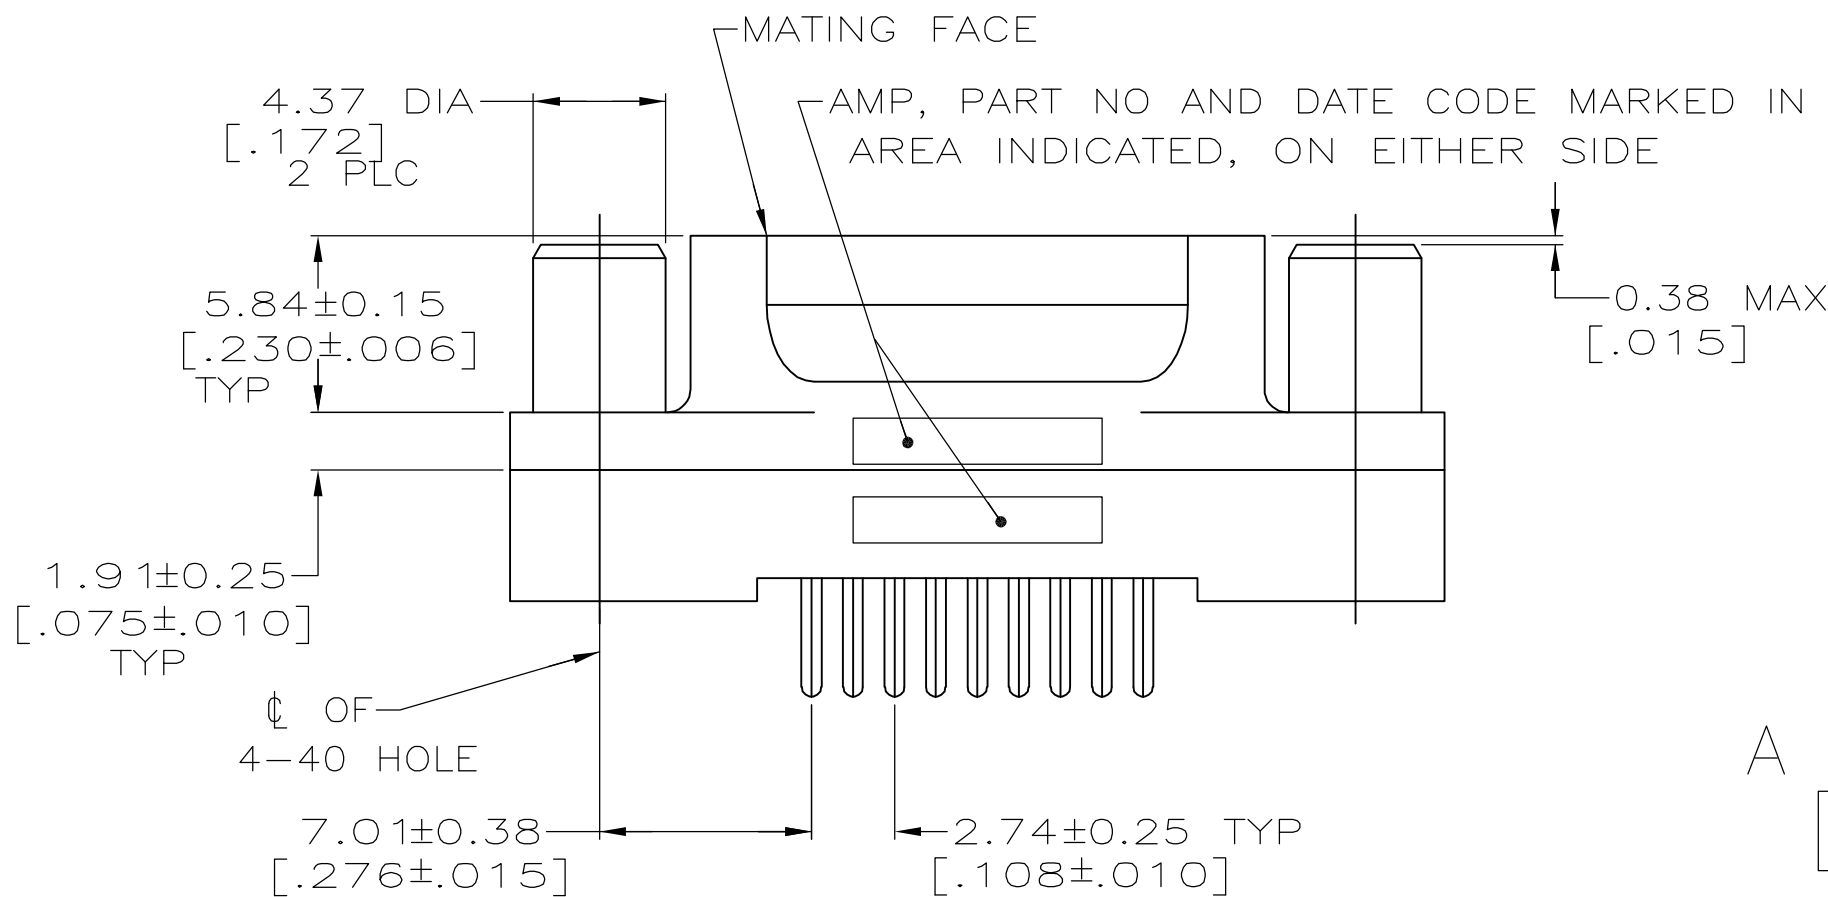

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

OBSOLETE	6.35 [.250]	3	745071-6
OBSOLETE	6.35 [.250]	2	745071-5
	4.32 [.170]	3	745071-4
OBSOLETE	4.32 [.170]	2	745071-3
	3.18 [.125]	3	745071-2
	3.18 [.125]	2	745071-1
DIMENSION A		CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. McCLINTON	11-14-89	tyco Electronics			Tyco Electronics Corporation		
		CHK	R. STONE	2-1-90				Harrisburg, PA 17105-3608		
		APVD	C. ROHDE	2-2-90	NAME			PLUG ASSEMBLY, SIZE 1,		
		PRODUCT SPEC			108-40025			9 POSN, VERTICAL,		
		APPLICATION SPEC			—			AMPLIMITE® HD-20		
MATERIAL		FINISH			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
1		SCREWLOCK 4			A2	00779	C=745071	—		
		CONTACT: SEE TABLE			CUSTOMER DRAWING			SCALE	SHEET	REV
								NTS	1 OF 1	H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[745071-1](#)