

THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
GE	00	P	LTR	DESCRIPTION	DATE
		B1	EC	0K40-0368-03	01MAY03
					DWN
					APVD
					JRB
					LLV

NOTES:

1 USE STAMPED AND FORMED CONTACT P/N 414942-1, ORDERED SEPARATELY. CONTACT CRIMP TOOLING REQUIRED: AMP-O-LECTRIC P/N 354500-1 WITH APPLICATOR P/N 466689-2, USE PAD LETTER A.

2 FERRULE P/N 9-221132-0 INCLUDED IN KIT. FERRULE CRIMP TOOLING: POWER UNIT P/N 189721-1 (HAND ACTUATED), OR P/N 189722-1 (FOOT ACTUATED) TOOL HOLDER P/N 356302-1 (RATCHED) OR P/N 189767-1 (NON-RATCHED). ADAPTER P/N 679304-1 WITH DIE SET P/N 220189-1.





3 MATERIAL;
 WASHER: PHOSPHOR BRONZE
 SPRING: STAINLESS STEEL WIRE, AISI 302
 DIELECTRIC: POLYMETHYLPENTENE
 SHELL: ZINC DIE CAST
 HOUSING: ACETAL
 FERRULE: BRASS OR COPPER

4. KIT IS BULK PACKAGED.

5 WHEN PURCHASING 109763-2, FERRULE 9-221132-0 MUST BE ORDERED SEPERATELY.




6 USE STAMPED AND FORMED CONTACT P/N 414942-2, ORDERED SEPARATELY. CRIMP TOOLING REQUIRED: AMP-O-LECTRIC 354500-1 WITH APPLICATOR P/N 567386-2.

7 FERRULE P/N 9-328666-0 INCLUDED IN KIT. FERRULE CRIMP TOOLING: POWER UNIT 189721-1 (HAND ACTUATED), OR P/N 189722-1 (FOOT ACTUATED). TOOL HOLDER P/N 356302-1 (RATCHED) OR 189767-1 (NON-RACHETED). ADAPTER P/N 679304-1 WITH DIE SET 318450-2.

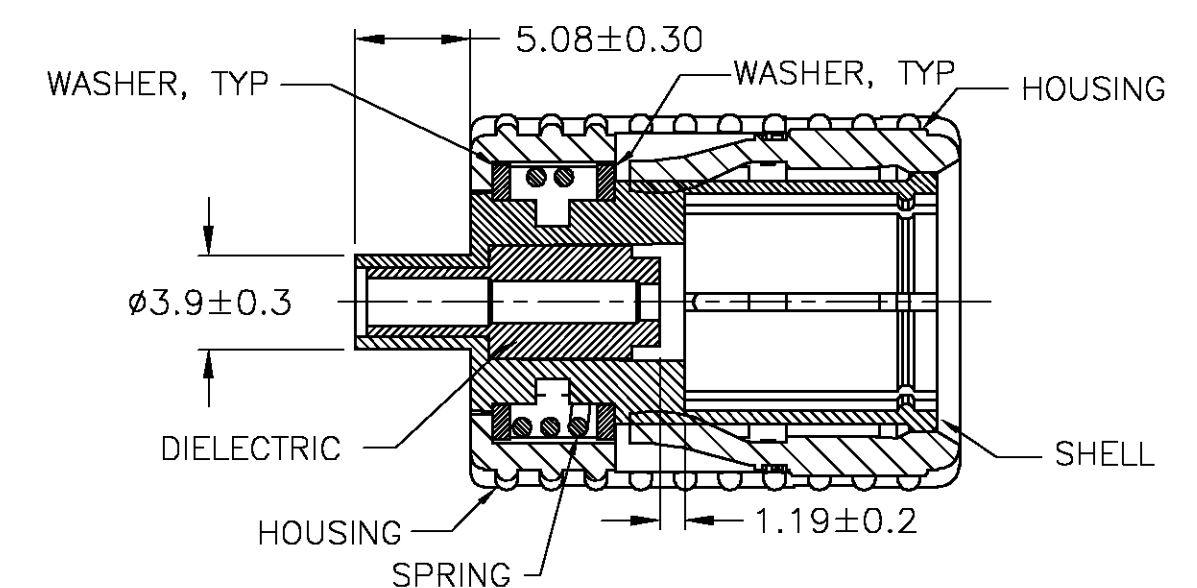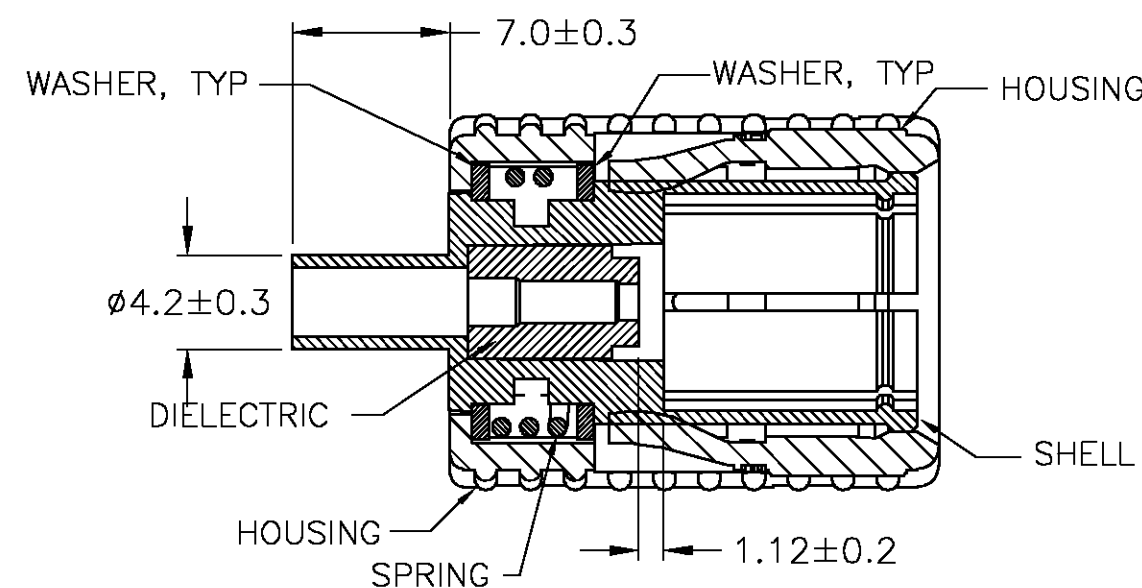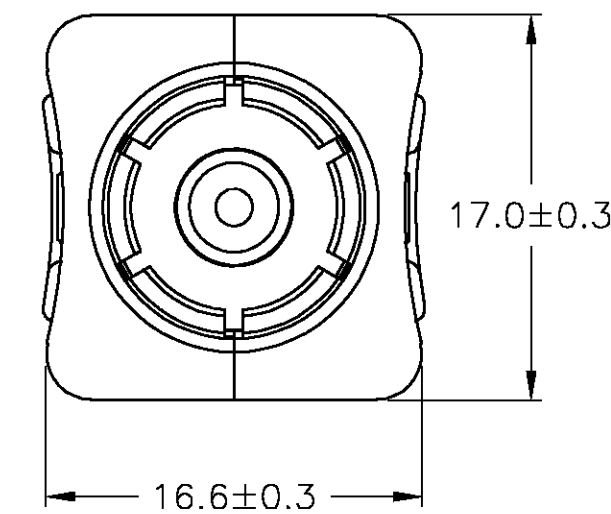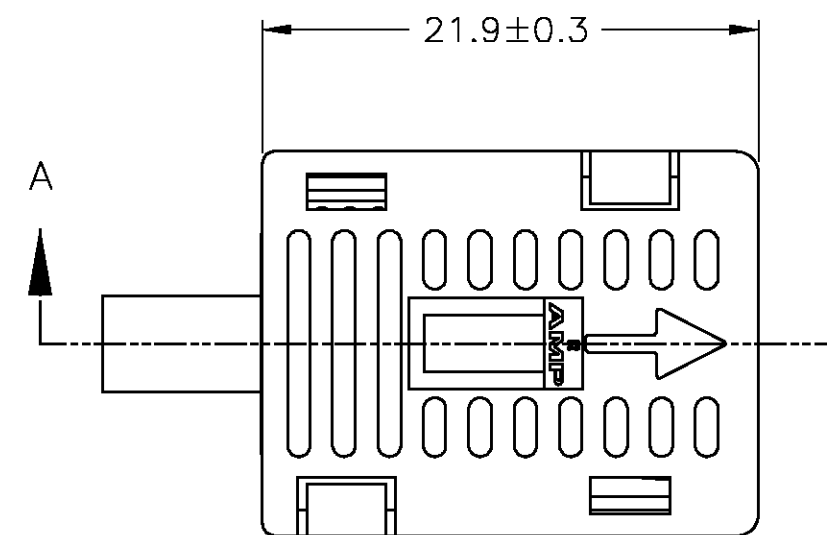


SECTION A-A
 109763-1, WITHOUT FERRULE
 AND 109763-2


SECTION A-A
 109763-3

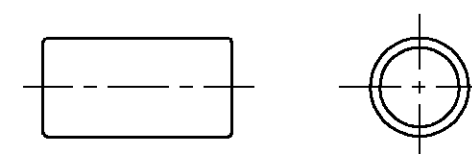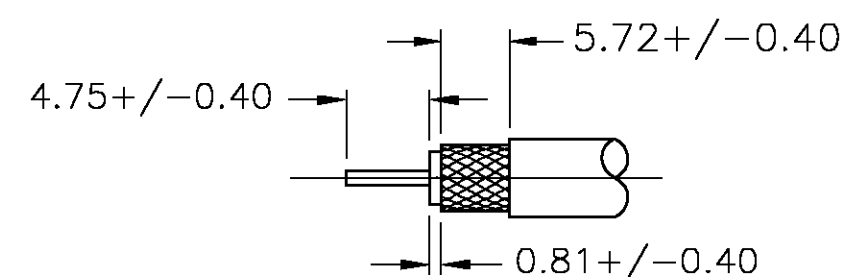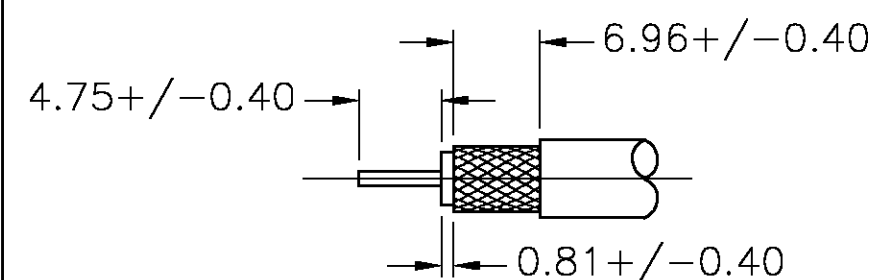

FERRULE
 P/N
 9-221132-0

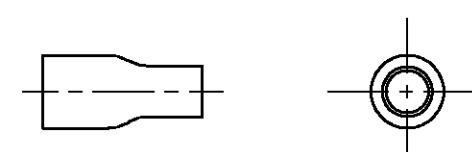

FERRULE
 P/N 9-328666-0



KIT FOR RG-174/U CABLE	109763-3
PLUG ASSEMBLY ONLY FOR RG-58/U CABLE	109763-2
KIT FOR RG-58/U CABLE	109763-1
DESCRIPTION	PART NO

RECOMMENDED STRIP LENGTH
 FOR 109763-1 & 109763-2

RECOMMENDED STRIP LENGTH
 FOR 109763-3

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN A. ALBINO 16/MAR/00	04APR01	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: MM		CHK A. WEISZ 16/MAR/00			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. GOTO 16/MAR/00		NAME MINI UNF PLASTIC SHAP LOCK PLUG	
0 PLC ± -		PRODUCT SPEC	108-1584	SIZE	
1 PLC ± 0.4		APPLICATION SPEC	114-13044	CAGE CODE	
2 PLC ± -		WEIGHT	-	DRAWING NO	
3 PLC ± -		CUSTOMER DRAWING		A2 00779	
4 PLC ± -				C=109763	
ANGLES ± -				RESTRICTED TO	
FINISH				SCALE 3:1	
MATERIAL				SHEET 1 OF 1	
TIN				REV B1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[109763-3](#)