


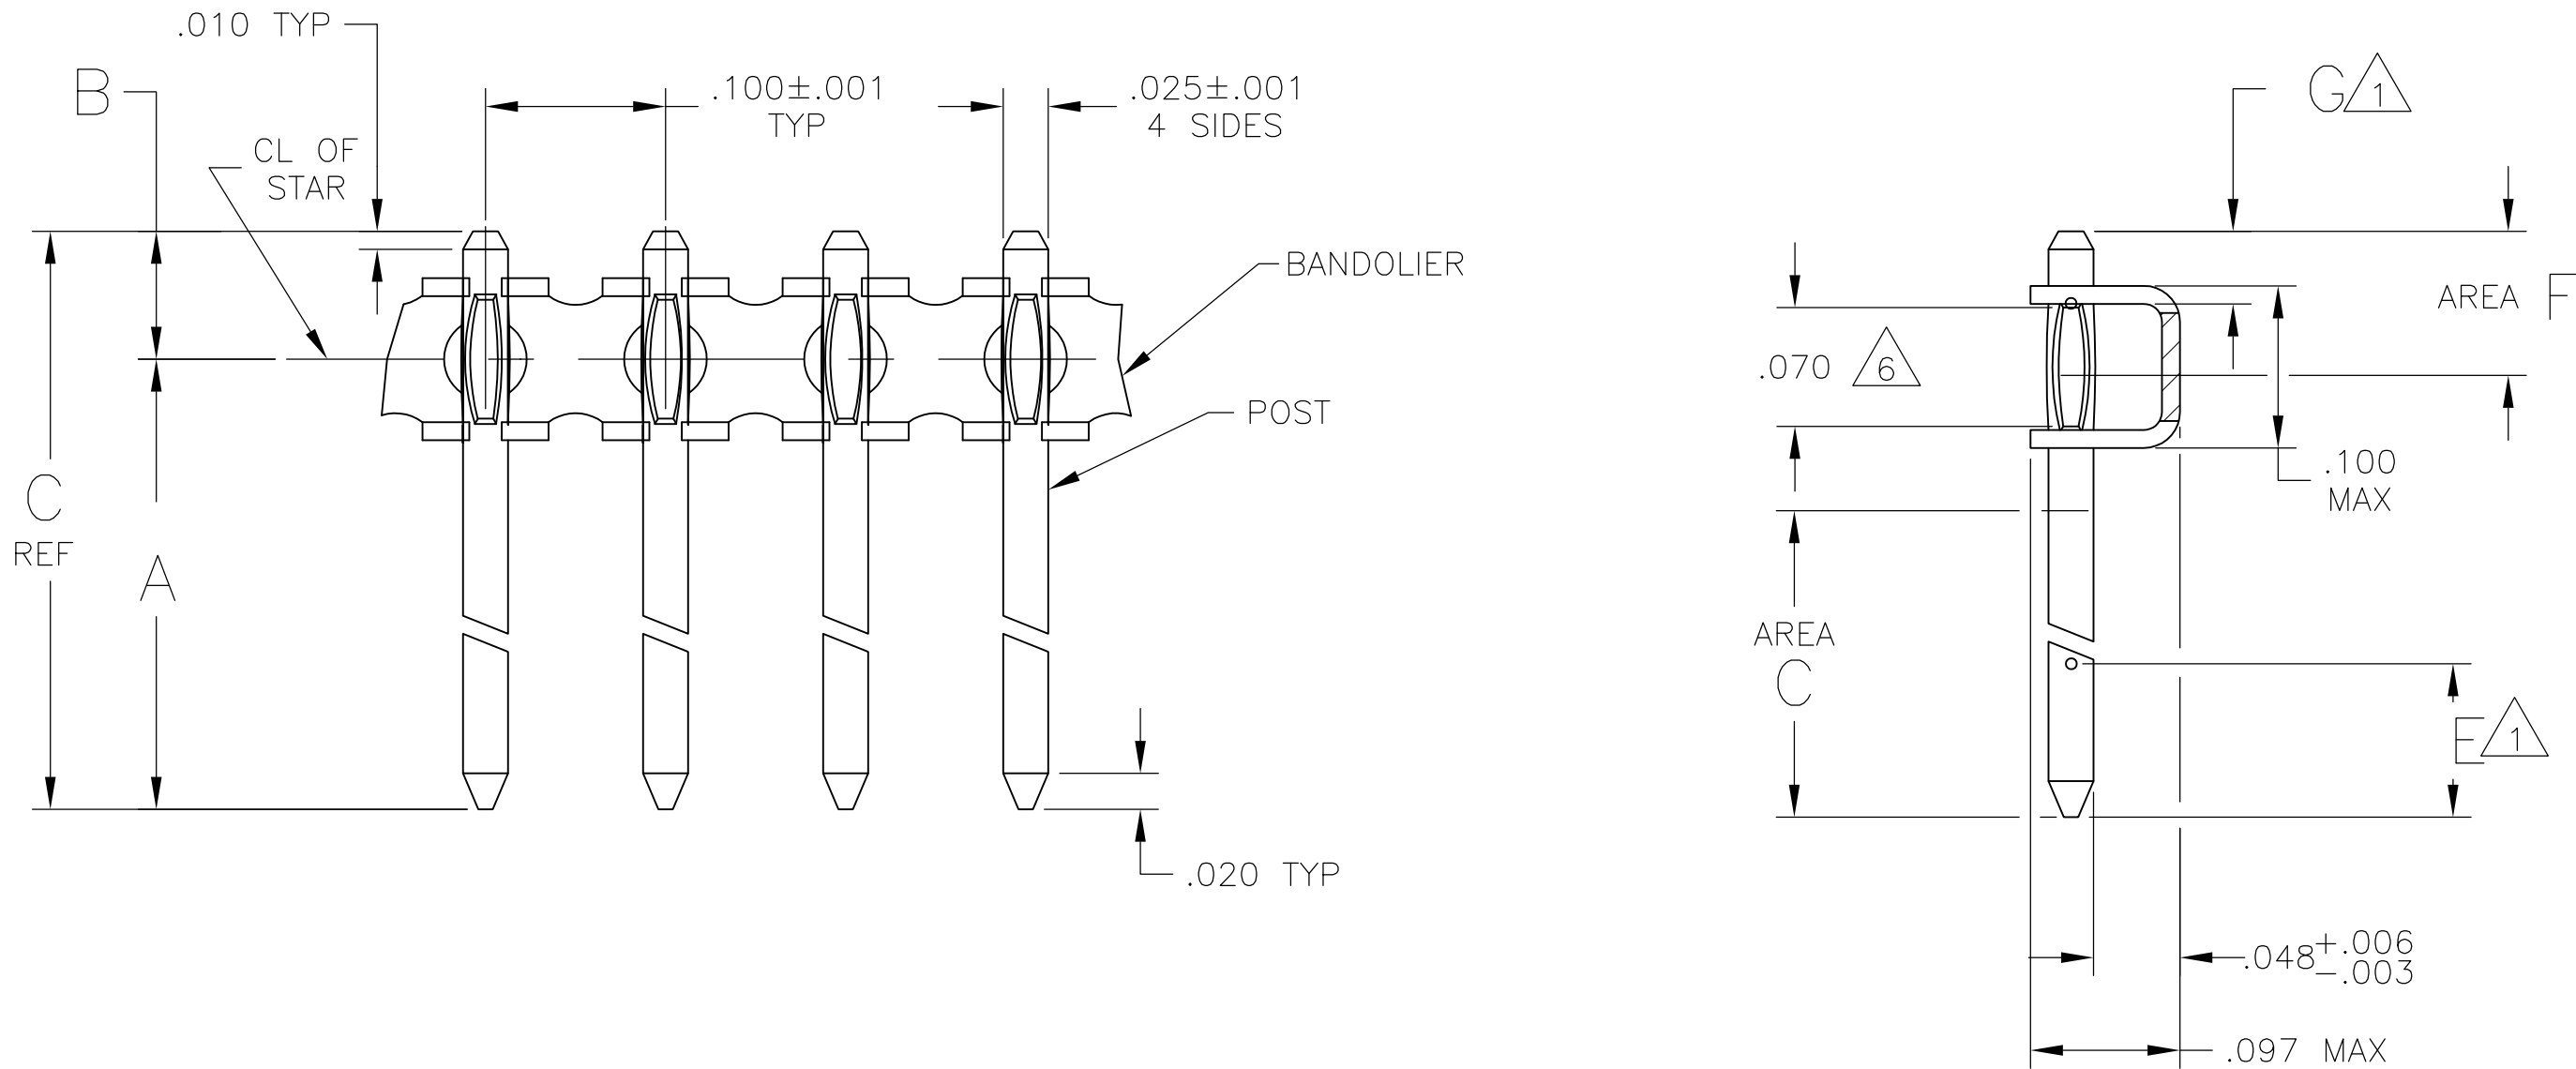

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 .000030 GOLD ON AREA D, .000100 - .000200 MATTE TIN-LEAD ON AREA F, ALL OVER .000050 NICKEL ENTIRE POST
- 3 .000100 - .000200 BRIGHT TIN-LEAD OVER .000050 NICKEL ENTIRE POST
4. RECOMMENDED P.C.BOARD HOLE SIZE:
- | P C BOARD THICKNESS | PLATED HOLE SIZE | UNPLATED HOLE SIZE |
|---------------------|------------------|--------------------|
| .062 | .034±.002 | .036±.002 |
| .093 | .034±.002 | .036±.002 |
| .125 | .034±.002 | .036±.002 |
- 5 .000015 GOLD ON AREA D, .000100 - .000200 MATTE TIN-LEAD ON AREA F, ALL OVER .000050 NICKEL ENTIRE POST.
- 6 DIMENSION PERTAINS TO THE LENGTH OF THE INTERFERENCE AREA OF THE STAR.
- 7 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 8 .000030 GOLD ON AREA D, .000100-.000200 MATTE TIN ON AREA F, ALL OVER .000050 NICKEL ENTIRE POST.
- 9 .000100-.000200 MATTE TIN OVER .000050 NICKEL ENTIRE PAST.
- 10 .000015 GOLD ON AREA D, .000100-.000200 MATTE TIN ON AREA F, ALL OVER .000050 NICKEL ENTIRE POST.
- 11 ROHS 2002/95/EC COMPLIANT.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7		.245	10	.015	.080	.080	.230	.451	.071	.380	11	6-103577-9
12	OBSOLETE	.235	10	.015	.080	.100	.185	.341	.071	.270	11	6-103577-7
		.283	9	.015	.080	.100	.185	.389	.071	.318	11	6-103577-5
12	OBSOLETE	.318	10	.015	.080	.100	.200	.424	.071	.353	11	6-103577-3
		.235	9	-	-	-	-	.341	.071	.270	11	6-103577-1
12	OBSOLETE	.283	9	-	-	-	-	.389	.071	.318	11	5-103577-9
12	OBSOLETE	.318	9	-	-	-	-	.424	.071	.353	11	5-103577-7
		.235	8	.015	.080	.100	.185	.341	.071	.270	11	5-103577-5
		.283	8	.015	.080	.100	.185	.389	.071	.318	11	5-103577-3
		.318	8	.015	.080	.100	.200	.424	.071	.353	11	5-103577-1
7		.245	5	.015	.080	.080	.230	.451	.071	.380		1-103577-9
		.235	5	.015	.080	.100	.185	.341	.071	.270		1-103577-7
		.283	3	.015	.080	.100	.185	.389	.071	.318		1-103577-5
		.318	5	.015	.080	.100	.200	.424	.071	.353		1-103577-3
		.235	3	-	-	-	-	.341	.071	.270		1-103577-1
12	OBSOLETE	.283	3	-	-	-	-	.389	.071	.318		103577-9
		.318	3	-	-	-	-	.424	.071	.353		103577-7
		.235	2	.015	.080	.100	.185	.341	.071	.270		103577-5
		.283	2	.015	.080	.100	.185	.389	.071	.318		103577-3
		.318	2	.015	.080	.100	.200	.424	.071	.353		103577-1
		MATING HEIGHT ABOVE BOARD (REF)	FINISH	G	F	E	D	C	B	A		ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL
BANDOLIER - BRASS
POST-PHOS BRONZE

DWN
G DOUTY
CHK
R FEIDT
APVD
R ELICKER
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
-

12AUG87
12SEP87
12SEP87

NAME
ASSEMBLY, BANDOLIER,
.100 CL, .025 SQUARE POSTS

SIZE
A1

CAGE CODE
00779

DRAWING NO
103577

RESTRICTED TO
-

TE Connectivity

CUSTOMER DRAWING

SCALE 10:1

SHEET 1 OF 1

REV G3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103577-3](#)