
UNCONTROLLED DOCUMENT

UNDER REVISION

PART NUMBER	SSI-LXR4815ID-WR	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
10.30.00	E.C.N. #10674.		Α
01.10.02	E.C.N. #10BRDR. & REDRAWN.		В

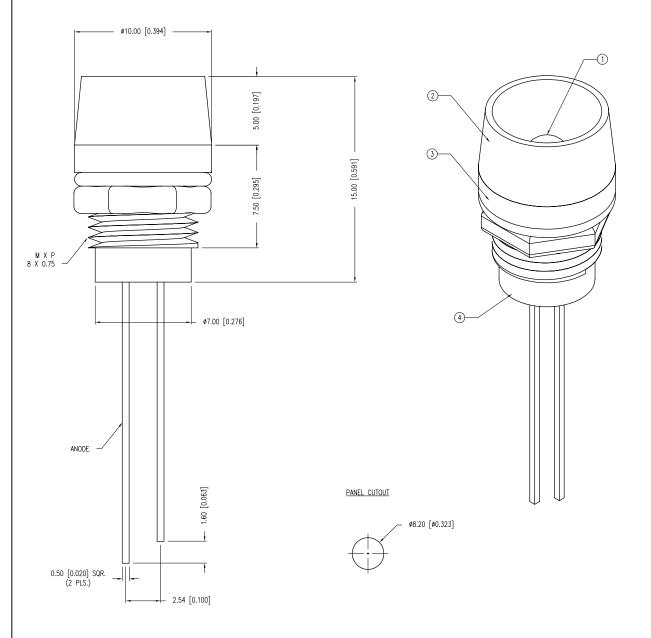

ELECTRO-OPTICAL	CHARACTERISTICS	S T <sub>A</sub> = 25°C	$I_f = 20 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2.5	$V_{f}$	
REVERSE VOLTAGE	5.0			$V_r$	I <sub>r</sub> =100uA
AXIAL INTENSITY		40		mcd	I <sub>f</sub> =20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH	H: RED DIF	FUSED			

LIMITS OF SAFE OPERATION AT 25°C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/⁺C
DPERATING TEMP.	-40 TO +85	.с
STORAGE TEMP.	-40 TO +85	.c
SOLDERING TEMP.	+260	.C
2.0mm FROM BODY		3 SEC. MAX

\* t<10uS

## NOTES:

- A 1. SSL-LX5063ID, RED LED.
- 2. SSI-LXR4815, CHROME HOUSING.
- 3. LXP-WA-3816, RUBBER GASKET.
- 4. SSH-LXH4815BSG, BLACK NYLON BUSHING, (NOT SEEN)
  5. THREAD LEADS THROUGH BUSHING, INSERT INTO HOUSING,
- BACKFILL WITH SILICON ADHESIVE, INSERT BUSHING INTO HOUSING. CRIMP INTO PLACE.
- 6. WATER RESISTANT PER NEMA STANDARD 250, SECTION 6.7.

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

T-5mm 635nm RED PANEL INDICATOR LED, RED DIFFUSED LENS, SPLASH RESISTANT.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 07.01.98 DRAWN BY: ВC PAGE: 1 OF CHKD BY: JD SCALE: NTS APRVD BY: (19) UNIT: mm [INCH]

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSI-LXR4815ID-WR