
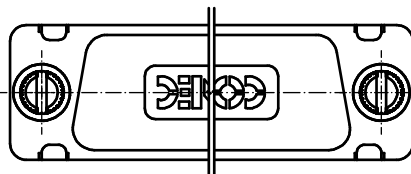

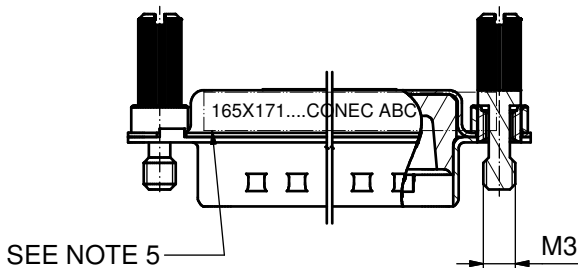
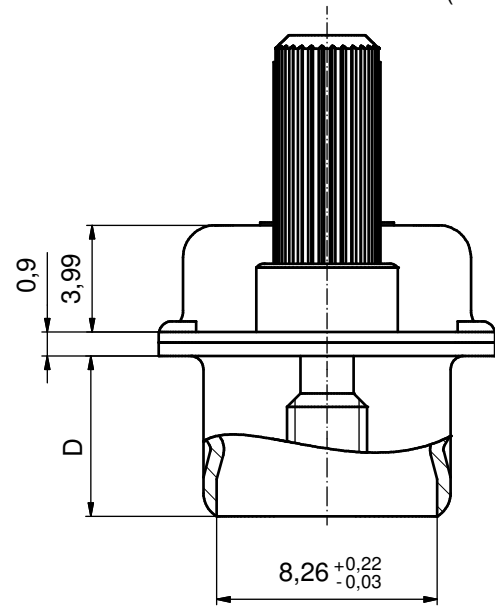



No. of pos.	A -0,76	B +0,25	C	D -0,3	Part-No. Bulk package	Part-No. Single package
9	31,19	16,79	25,00 ^{+0,12 -0,13}	6,12	165X17159X	165X17159XE
15	39,52	25,12	33,30 ^{+0,15 -0,1}	6,12	165X17169X	165X17169XE
25	53,42	38,84	47,04 $\pm$ 0,13	5,99	165X17179X	165X17179XE
37	69,70	55,30	63,50 $\pm$ 0,13	5,99	165X17189X	165X17189XE
50	67,31	52,68	61,10 ^{+0,14 -0,11}	5,99	165X17199X	165X17199XE

(5 : 1)

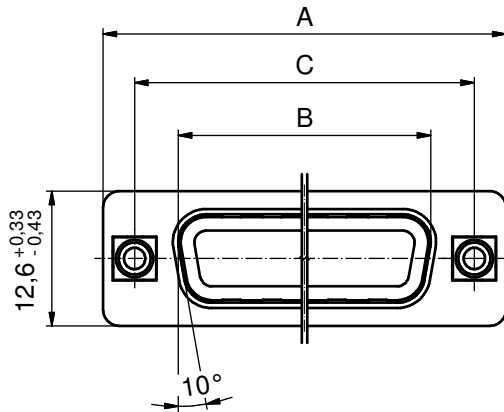

NOTES:

- METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
- INSULATOR: TPE
- THREADED INSERTS: BRASS
- SCREW: STEEL; NICKEL PLATED
- CONNECTOR IS PART MARKED: **PART NO. CONEC ABC**

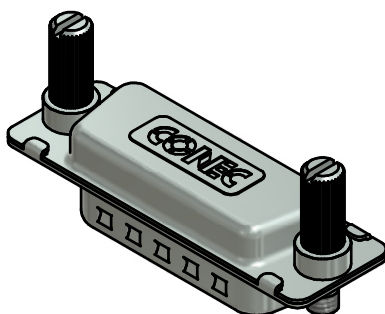

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance		 dim. in mm	scale: 2:1 (5:1)	
								material: SEE NOTES	
					date	name		title: HOOD 9-50pos. WATER RESISTANT AND SHIELDED; FOR EMI/RFI for socket connector, with jack screws	
					drawn	29.06.11	Henneboel		
					appd.	01.07.11	Fischer		
					norm				
					d-old		dwg no: 16K1A2839		DIN-A3 sh: 1
		a	Original					part no: SEE TABLE	
rev.	description	date	name						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[165X17189X](#)