


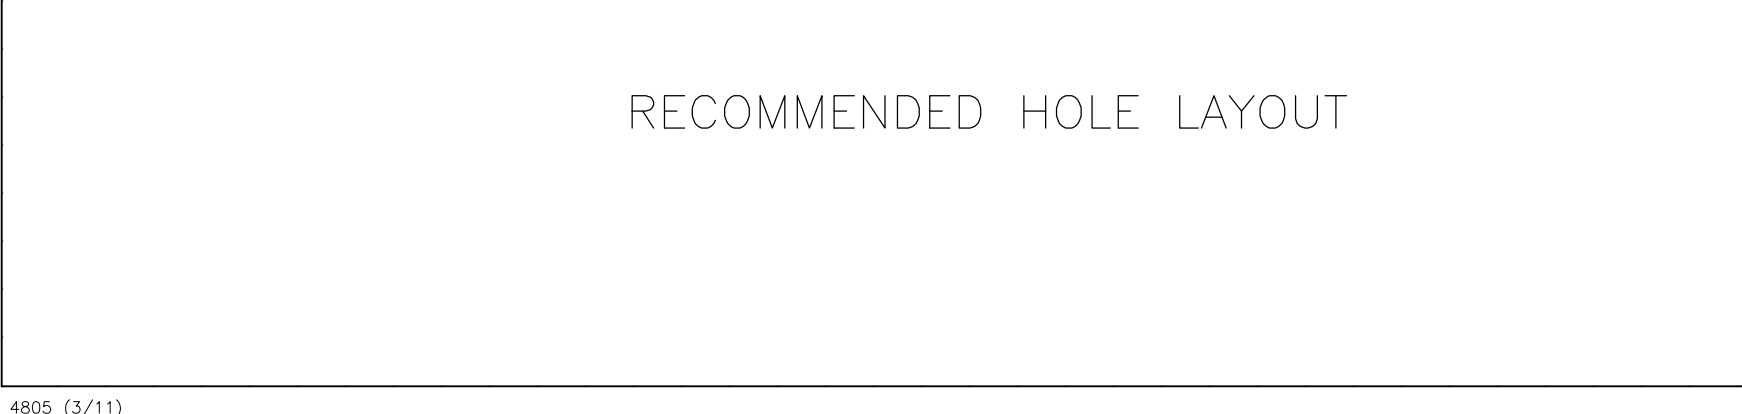

- | | |
|---|---|
| 1 | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING |
| 2 | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| 3 | .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL. |
| 4 | .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL. |
| 5 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

	3.506	.106	3.732	3.600	36	74	 3-102617-5-
	3.406	.106	3.632	3.500	35	72	 3-102617-4-
	3.306	.106	3.532	3.400	34	70	 3-102617-3-
	3.206	.106	3.432	3.300	33	68	 3-102617-2-
	3.106	.106	3.332	3.200	32	66	 3-102617-1-
	3.006	.106	3.232	3.100	31	64	3-102617-0
	2.906	.106	3.132	3.000	30	62	 2-102617-9-
	2.806	.106	3.032	2.900	29	60	2-102617-8
	2.706	.106	2.932	2.800	28	58	 2-102617-7-
	2.606	.106	2.832	2.700	27	56	 2-102617-6-
	2.506	.106	2.732	2.600	26	54	 2-102617-5-
	2.406	.106	2.632	2.500	25	52	 2-102617-4-
	2.306	.106	2.532	2.400	24	50	2-102617-3
	2.206	.106	2.432	2.300	23	48	 2-102617-2-
	2.106	.106	2.332	2.200	22	46	 2-102617-1-
	2.006	.106	2.232	2.100	21	44	 2-102617-0-
	1.906	.106	2.132	2.000	20	42	 1-102617-9-
	1.806	.106	2.032	1.900	19	40	1-102617-8
	1.706	.106	1.932	1.800	18	38	 1-102617-7-
	1.606	.106	1.832	1.700	17	36	 1-102617-6-
	1.506	.106	1.732	1.600	16	34	1-102617-5
	1.406	.106	1.632	1.500	15	32	1-102617-4
	1.306	.106	1.532	1.400	14	30	1-102617-3
	1.206	.106	1.432	1.300	13	28	 1-102617-2-
	1.106	.106	1.332	1.200	12	26	1-102617-1
	1.006	.106	1.232	1.100	11	24	1-102617-0
	.906	.106	1.132	1.000	10	22	102617-9
	.806	.106	1.032	.900	9	20	102617-8
	—	.406	.932	.800	8	18	102617-7
	—	.306	.832	.700	7	16	102617-6
	—	.306	.732	.600	6	14	102617-5
	—	.206	.632	.500	5	12	102617-4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: H. MOLL	28/JUL/87	 TE Connectivity	
DIMENSIONS:		CHE: J. L. MAYER	28/JUL/87		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APO R FEITZ	28/JUL/87	NAME	
INCHES		PRODUCT SPEC		HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, .100X.100 C/L, RIGHT ANGLE, W/.025 SQ POSTS	
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± —	APPLICATION SPEC		SIZE	CAGE CODE
MATERIAL	FINISH	WEIGHT		DRAWING NO	RESTRICTED TO
HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR—BLACK	SEE TABLE			A1 00779 C-102617	—
POSTS: PHOS BRONZE		CUSTOMER DRAWING		SCALE: 4:1	SHEET 1 OF 1 REV J2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-102617-0](#)