


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0717640504](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Low Profile, Dual Row, Right-Angle, High Temperature, 4 Circuits, 0.76µm Gold (Au) Selective Plating, with 8.13mm Mating Pin Length

Documents:

[3D Model](#) [Packaging Specification PK-70873-0353-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-71764-001 \(PDF\)](#)

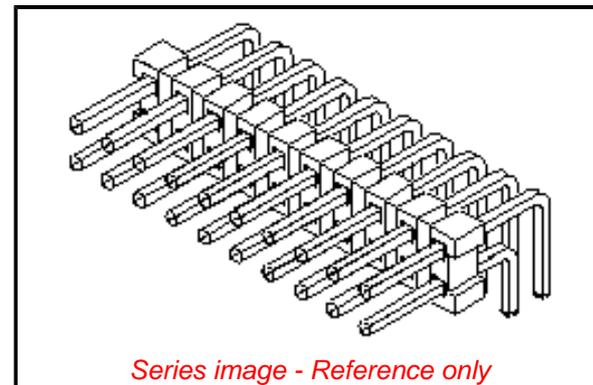

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [71764](#)
 Application Board-to-Board, Signal, Wire-to-Board
 CURRENT-MAX-NUMERIC 3.0
 Overview [C-Grid Connector Products](#)
 PITCH-MATING-NUMERIC 2.54
 Product Name C-Grid
 UPC 822348718979

Physical

Breakaway Yes
 Circuits (Loaded) 4
 Circuits (maximum) 4
 Color - Resin Black
 Durability (mating cycles max) 25
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part None
 Material - Metal Brass, Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 0.360/g
 Number of Rows 2
 Orientation Right Angle
 PC Tail Length 2.79mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tube
 Pitch - Mating Interface 2.54mm
 Plating min - Mating 0.762µm
 Plating min - Termination 1.905µm
 Polarized to Mating Part No
 Shrouded No
 Stackable Yes
 Temperature Range - Operating -40° to +105°C
 Termination Interface: Style Through Hole

Electrical

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/71/2019 (16 July
 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[71764 Series](#)

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	030
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-70873-0353-001
Product Specification	PS-71764-001
Sales Drawing	SD-71764-001-001

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[71764-0504](#)