

**Power PCB Relay RT1 Inrush**

- 1 pole 16A, 1 form C (CO) or 1 form A (NO) contact
- For inrush peak currents up to 80A
- Mono- or bistable coil
- 5kV/10mm coil-contact
- Reinforced insulation
- Ambient temperature 85°C
- WG version: product in accordance to IEC 60335-1



F0177-C



Typical applications

Domestic appliances, heating control, lighting control

**Approvals**

VDE Cert. No. 40007571, UL E214025, cCSAus 1142018  
Technical data of approved types on request

**Contact Data**



|   |                                |  |
|---|--------------------------------|--|
| Contact arrangement                           | 1 form C (CO) or 1 form A (NO) |  |
| Rated voltage                                 | 250VAC                         |  |
| Max. switching voltage                        | 400VAC                         |  |
| Rated current                                 | 16A                            |  |
| Limiting continuous current                   | 16A, UL: 20A (K-version)       |  |
| Limiting making current,                      |                                |  |
| max. 4s, df 10%                               | 30A                            |  |
| max. 20ms (incandescent lamps), RT33L version | 80A                            |  |
| Breaking capacity max.                        | 4000VA                         |  |
| Contact material                              | AgNi90/10, AgSnO               |  |
| Frequency of operation, with/without load     | 360/72000h <sup>-1</sup>       |  |
| Operate/release time max., DC coil            | 9/6ms                          |  |
| Operate/Reset time max., bistable version     | 10/10ms                        |  |
| Bounce time max., form A/form B               | 3/6ms                          |  |

**Contact ratings**

| Type             | Contact | Load  | Cycles             |
|------------------|---------|---|--------------------|
| <b>IEC 61810</b> |         |   |                    |
| RT33L            | A (NO)  | 16A, 250VAC resistive, 85°C                 | 50x10 <sup>3</sup> |
| RT33L            | A (NO)  | 10A, 400VAC resistive, 85°C                 | 10x10 <sup>3</sup> |
| RT31             | C (CO)  | 16A, 250VAC resistive, 85°C                 | 6x10 <sup>3</sup>  |
| RT33K            | A (NO)  | 16A, 250VAC resistive, 85°C                 | 30x10 <sup>3</sup> |
| <b>UL 508</b>    |         |   |                    |
| RT33K            | A (NO)  | 20A, 277VAC general purpose, 40°C           | 10x10 <sup>3</sup> |
| RT33L            | A (NO)  | 16A, 250VAC resistive, 85°C                 | 50x10 <sup>3</sup> |
| RT31             | C (CO)  | 16A, 250VAC resistive, 85°C                 | 6x10 <sup>3</sup>  |
| RT33L            | A (NO)  | 1000W Tungsten, 120VAC, 60 Hz, 40°C         | 6x10 <sup>3</sup>  |
| RT33L            | A (NO)  | 1000W standard ballast, 120VAC, 60 Hz, 40°C | 6x10 <sup>3</sup>  |

Mechanical endurance

monostable version >30x10<sup>6</sup> operations  
bistable version >5x10<sup>6</sup> operations

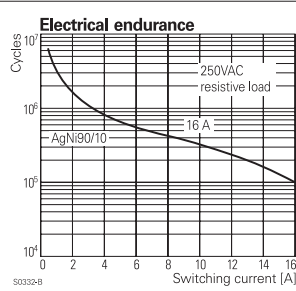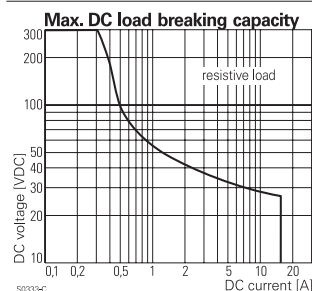

**Coil Data, DC coil**


|                                     |             |
|-------------------------------------|-------------|
| Coil voltage range                  | 5 to 110VDC |
| Operative range, IEC 61810          | 2           |
| Coil insulation system according UL | class F     |

**Coil versions, DC coil**

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% <sup>1)</sup> | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-------------------------------------|---------------------|
| 005       | 5                 | 3.5                 | 0.5                 | 62                                  | 403                 |
| 006       | 6                 | 4.2                 | 0.6                 | 90                                  | 400                 |
| 012       | 12                | 8.4                 | 1.2                 | 360                                 | 400                 |
| 024       | 24                | 16.8                | 2.4                 | 1440                                | 400                 |
| 048       | 48                | 33.6                | 4.8                 | 5520                                | 417                 |
| 060       | 60                | 42.0                | 6.0                 | 8570 <sup>1)</sup>                  | 420                 |

1) Coil resistance ±12%.

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

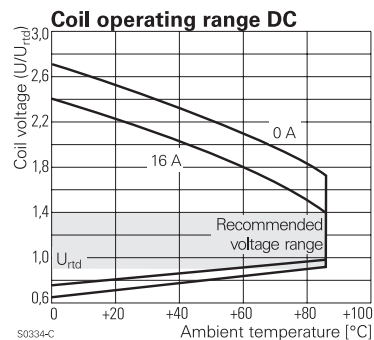

**Coil Data, bistable coils**

|   | 1 coil                        | 2 coils |
|---|-------------------------------|---------|
| Magnetic system                           | polarized, bistable           |         |
| Coil voltage range                        | 5 to 24VDC                    |         |
| Operative range, IEC 61810                | 2                             |         |
| Limiting voltage, % of rated coil voltage | 120%                          | 150%    |
| Min./Max. energization duration           | 30ms/1min at <10% duty factor |         |
| Coil insulation system according UL       | class F                       |         |

**Power PCB Relay RT1 Inrush** (Continued)

**Coil Data** (continued)

**Coil versions, bistable coil**

| Coil code               | Rated voltage VDC | Set voltage VDC | Reset voltage VDC | Coil resistance $\Omega \pm 10\%$ | Rated coil power mW |
|-------------------------|-------------------|-----------------|-------------------|-----------------------------------|---------------------|
| <b>bistable, 1 coil</b> |                   |                 |                   |                                   |                     |
| A05                     | 5                 | 3.5             | 2.8               | 62                                | 403                 |
| A06                     | 6                 | 4.2             | 3.3               | 90                                | 400                 |
| A12                     | 12                | 8.4             | 6.6               | 360                               | 400                 |
| A24                     | 24                | 16.8            | 13.2              | 1440                              | 400                 |

**bistable, 2 coils**

|     |    |      |      |     |     |
|-----|----|------|------|-----|-----|
| F05 | 5  | 3.5  | 2.8  | 42  | 595 |
| F06 | 6  | 4.2  | 3.3  | 55  | 655 |
| F12 | 12 | 8.4  | 6.6  | 240 | 600 |
| F24 | 24 | 16.8 | 13.2 | 886 | 650 |

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

**Bistable coils - operation**

| Version        | 1 coil |    | 2 coils |    |    |
|----------------|--------|----|---------|----|----|
|                | A1     | A2 | A1      | A3 | A2 |
| Coil terminals |        |    |         |    |    |
| Operate        | +      | -  | +       | +  | -  |
| Reset          | -      | +  | -       | +  |    |

Contact position not defined at delivery

**Insulation Data**



|                                    |                      |
|------------------------------------|----------------------|
| Initial dielectric strength        |                      |
| between open contacts              | 1000V <sub>rms</sub> |
| between contact and coil           | 5000V <sub>rms</sub> |
| Clearance/creepage                 |                      |
| between contact and coil           | ≥10/10mm             |
| Material group of insulation parts | IIIa                 |
| Tracking index of relay base       | PTI 250V             |

**Other Data**


|   |                                |
|---|--------------------------------|
| Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customer-support/rohssupportcenter">www.te.com/customer-support/rohssupportcenter</a> |                                |
| Resistance to heat and fire   |                                |
| WG version  | according EN60335-1            |
| Ambient temperature   | -40 to 85°C                    |
| Category of environmental protection  |                                |
| IEC 61810   | RTII - flux proof              |
| Vibration resistance (functional), form A/form B contact, 30 to 500Hz   | 20/5g                          |
| Shock resistance (destructive)  | 100g                           |
| Terminal type   | PCB-THT, plug-in <sup>2)</sup> |
| Weight  | 14g                            |
| Resistance to soldering heat THT  |                                |
| IEC 60068-2-20  | 270°C/10s                      |
| Packaging/unit  | tube/20 pcs., box/500 pcs.     |
| 2) socket available for 1 coil version only, see Accessories  |                                |

**Accessories**

For details see datasheet [Accessories Industrial Power Relay RT<sup>2\)</sup>](#)  
Socket available for 1 coil version only.  
NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

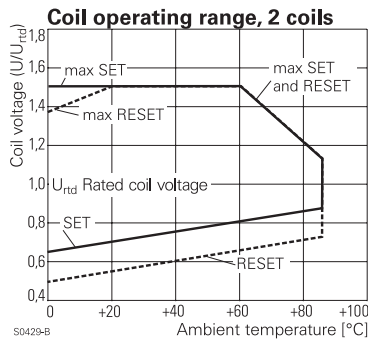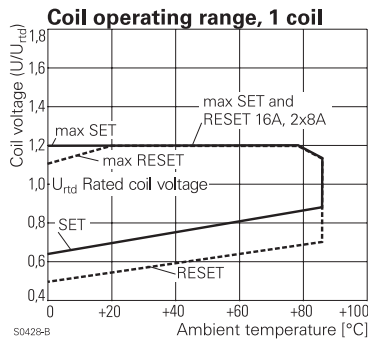

**Dimensions**

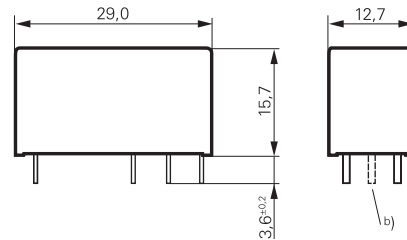


S0272-BC

**Power PCB Relay RT1 Inrush** (Continued)

**PCB layout / terminal assignment**


Bottom view on solder pins

16A, 1 form C (CO) contact, pinning 5mm

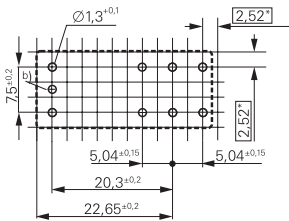


S0418-CM

monostable version




S0163-BE

bistable version a)




S0163-DI

16A, 1 form A (NO) contact, pinning 5mm

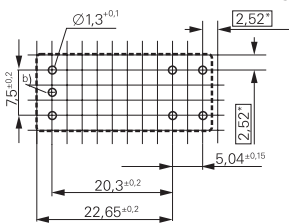


S0418-CV

monostable version



S0163-BF

bistable version a)




S0163-DPS

a) Indicated contact position during or after coil energization with reset voltage.


b) for 2 coil version only

12A, 1 form C (CO) contact, pinning 5mm

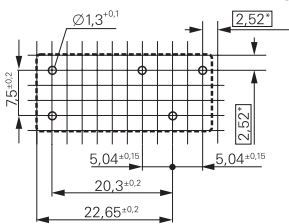


S0418-CN

monostable version, 1 form C (CO)



S0163-BC

monostable version, 1 form A (NO)



S0163-BD

\*) With the recommended PCB hole sizes a grid pattern from 2.5mm to 2.54mm can be used.

**Product code structure**

Typical product code

**RT 3 3 L 012**

**Type**  
Power PCB Relay RT1 Inrush

**Version**  
3 16A, pinning 5mm, flux proof  
D 16A, pinning 5mm, sealed

**Contact configuration**  
1 1 form C (CO) contact  
3 1 form A (NO) contact

**Contact material**  
K AgNi 90/10  
L AgSnO<sub>2</sub>

**Coil**  
Coil code: please refer to coil versions table

**Version**  
Blank Standard version  
WG Product in accordance to IEC 60335-1

**Power PCB Relay RT1 Inrush** (Continued)

| Product code | Version                                     | Contact material   | Coil             | Coil  | Part Number |
|--------------|---|--------------------|------------------|-------|-------------|
| RT31L012     | 1 form C (CO)                               | AgSnO <sub>2</sub> | Monostable       | 12VDC | 7-1393239-3 |
| RT31L024     | 16A, pinning 5mm                            |                    |                  | 24VDC | 7-1393239-5 |
| RT31L048     | flux proof                                  |                    |                  | 48VDC | 7-1393239-6 |
| RT33K012     | 1 form A (NO)                               | AgNi 90/10         |                  | 12VDC | 2-1393240-3 |
| RT33K024     | 16A, pinning 5mm                            |                    |                  | 24VDC | 2-1393240-4 |
| RT33KF12     | flux proof                                  |                    | Bistable 2 coils | 12VDC | 1-1415540-1 |
| RT33L012     |   | AgSnO <sub>2</sub> | Monostable       |       | 3-1393240-3 |
| RT33L012WG   |   |                    |                  |       | 2-1415538-2 |
| RT33L024     |   |                    |                  | 24VDC | 3-1393240-5 |
| RT33LA12     |   |                    | Bistable 1 coil  | 12VDC | 2-1393240-7 |
| RT33LA24     |   |                    |                  | 24VDC | 3-1415379-1 |
| RT33LF12     |   |                    | Bistable 2 coils | 12VDC | 2-1393240-8 |
| RTD1L012     | 1 form C (CO)<br>16a, pinning 5mm<br>sealed | AgSnO <sub>2</sub> | Monostable       | 12VDC | 5-1393238-6 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RT31L024](#)