




Zero Ohm Jumper (0.0002 Ω Max.), Solid Copper Strip, Surface Mount Device

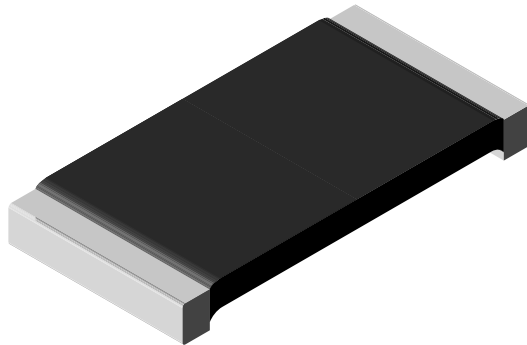

FEATURES

- All copper construction with solderable terminations
- Encapsulated with high temperature coating
- Very low inductance (< 2 nH)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information/tables in this datasheet for details.

STANDARD ELECTRICAL SPECIFICATIONS				
GLOBAL MODEL	SIZE	CURRENT RATING A	WEIGHT (typical) g/1000 pieces	RESISTANCE VALUE MAX. Ω
WSL0603...9	0603	32	1.9	0.0002
WSL0805...9	0805	35	4.8	0.0002
WSL1206...9	1206	50	16.2	0.0002
WSL2010...9	2010	71	38.9	0.0002
WSL2512...9	2512	100	63.6	0.0002

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	RESISTOR CHARACTERISTICS
Temperature coefficient	ppm/°C	3900
Operating temperature range	°C	-65 to +170
Maximum resistance value	Ω	0.0002 max.


GLOBAL PART NUMBER INFORMATION															
Global Part Numbering: WSL251200000ZEA9 (WSL2512, jumper, lead (Pb)-free)															
W	S	L	2	5	1	2	0	0	0	0	Z	E	A	9	
GLOBAL MODEL			RESISTANCE VALUE		TOLERANCE CODE			PACKAGING CODE			SPECIAL				
WSL0603 WSL0805 WSL1206 WSL2010 WSL2512			00000 for jumper		Z for jumper			EA = lead (Pb)-free, tape/reel EK = lead (Pb)-free, bulk TA = Pb tape/reel (R86) BA = Pb bulk (B43)			(dash number) 9 for jumper				

Note

- WSL Marking: www.vishay.com/doc?30327



DIMENSIONS in inches (millimeters)

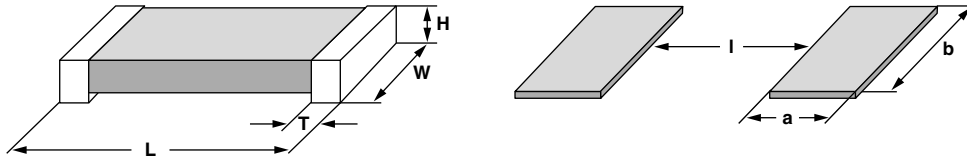

MODEL	DIMENSIONS				SOLDER PAD DIMENSIONS		
	L	W	H	T	a	b	l
WSL0603...9	0.060 ± 0.010 (1.52 ± 0.254)	0.030 ± 0.010 (0.76 ± 0.254)	0.013 ± 0.005 (0.330 ± 0.127)	0.015 ± 0.010 (0.381 ± 0.254)	0.040 (1.01)	0.040 (1.01)	0.020 (0.50)
WSL0805...9	0.080 ± 0.010 (2.03 ± 0.254)	0.050 ± 0.010 (1.27 ± 0.254)	0.013 ± 0.005 (0.330 ± 0.127)	0.015 ± 0.010 (0.381 ± 0.254)	0.040 (1.02)	0.050 (1.27)	0.020 (0.50)
WSL1206...9	0.126 ± 0.010 (3.20 ± 0.254)	0.063 ± 0.010 (1.60 ± 0.254)	0.025 ± 0.010 (0.635 ± 0.254)	0.020 ± 0.010 (0.508 ± 0.254)	0.062 (1.57)	0.070 (1.78)	0.030 (0.76)
WSL2010...9	0.200 ± 0.010 (5.08 ± 0.254)	0.100 ± 0.010 (2.54 ± 0.254)	0.025 ± 0.010 (0.635 ± 0.254)	0.020 ± 0.010 (0.508 ± 0.254)	0.055 (1.40)	0.120 (3.05)	0.130 (3.30)
WSL2512...9	0.250 ± 0.010 (6.35 ± 0.254)	0.125 ± 0.010 (3.18 ± 0.254)	0.025 ± 0.010 (0.635 ± 0.254)	0.030 ± 0.010 (0.762 ± 0.254)	0.065 (1.65)	0.145 (3.68)	0.160 (4.06)

PACKAGING				
MODEL	REEL			
	TAPE WIDTH	DIAMETER	PIECES/REEL	CODE
WSL0603...9	8 mm/punched paper	178 mm/7"	5000	EA
WSL0805...9	8 mm/punched paper	178 mm/7"	5000	EA
WSL1206...9	8 mm/embossed plastic	178 mm/7"	4000	EA
WSL2010...9	12 mm/embossed plastic	178 mm/7"	4000	EA
WSL2512...9	12 mm/embossed plastic	178 mm/7"	2000	EA

Note

- Embossed Carrier Tape per EIA-481



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[WSL2010R3320FBA](#) [WSL1206R0330FBA](#) [WSL1206R0100DTA](#) [WSL1206R0100FTB](#) [WSL1206R0500FBA](#)
[WSL1206R0200FTB](#) [WSL1206R0400FBA](#) [WSL1206R0800FBA](#) [WSL1206R0600FBA](#) [WSL1206R0300FBA](#)
[WSL1206R1500FBA](#) [WSL2010R4700FBA](#) [WSL2010R1200FBA](#) [WSL2010R1500FBA](#) [WSL2010R1800FBA](#)
[WSL2010R2500FBA](#) [WSL2010R2200FBA](#) [WSL2010R2700FBA](#) [WSL2010R0500FBA](#) [WSL2010R0100FBA](#)
[WSL2010R0300FBA](#) [WSL2010R0600FBA](#) [WSL2010R0200FBA](#) [WSL2010R2000FBA](#) [WSL2010R5000FBA](#)
[WSL2010R1000FBA](#) [WSL2010R4000FBA](#) [WSL2010R3000FBA](#) [WSL0805R1800FBA](#) [WSL0805R1200FBA](#)
[WSL12067L500FTB](#) [WSL2010R2000FEB](#) [WSL2512R0390FTA](#) [WSL2512R0240FTA](#) [WSL2512R0220FTA](#)
[WSL2512R0330FBA](#) [WSL2512R0750FBA](#) [WSL2512R0160FTB](#) [WSL2512R0120FBA](#) [WSL2512R0270FTA](#)
[WSL2512R0250FBA](#) [WSL25127L000FBA](#) [WSL25125L000FBA](#) [WSL25123L000FBA](#) [WSL25126L000FBA](#)
[WSL2512R0560FTA](#) [WSL2512R0680FBA](#) [WSL2512R0620FBA](#) [WSL2010R0680FBA](#) [WSL1206R0400FEK](#)
[WSL2010R0500DTA](#) [WSL2010R5000FTA](#) [WSL1206R0200DTB](#) [WSL0805R0250FTB](#) [WSL25127L500FBA](#)
[WSL2512R3320FTB](#) [WSL2512R5110FTB](#) [WSL2512R1620FTB](#) [WSL2512R1210FTB](#) [WSL2512R1460FTB](#)
[WSL2512R2320FTB](#) [WSL1206R2400FTB](#) [WSL1206R2500FTB](#) [WSL1206R1400FTB](#) [WSL1206R1300FTB](#)
[WSL1206R1100FTB](#) [WSL2010R4990FTB](#) [WSL2512R0470FTB](#) [WSL2512R0430FTB](#) [WSL25129L000FTB](#)
[WSL25122L000JTB](#) [WSL25128L000FTB](#) [WSL2512R0140FTB](#) [WSL2512R0510FTB](#) [WSL2512R0590FTB](#)
[WSL2512R0370FTB](#) [WSL25125L000JTB](#) [WSL2010R0240FTB](#) [WSL2010R0220FTB](#) [WSL2010R0650FTB](#)
[WSL2010R0620FTB](#) [WSL2010R0470FTB](#) [WSL20106L000FTB](#) [WSL2010R0160FTB](#) [WSL2010R0170FTB](#)
[WSL2010R0520FTB](#) [WSL2512R4870FTB](#) [WSL2512R4020FTB](#) [WSL2512R4990FTB](#) [WSL2512R4530FTB](#)
[WSL2512R2700FTB](#) [WSL2512R1800FTB](#) [WSL2512R1300FTB](#) [WSL0805R0100FTB](#) [WSL0805R0200FTB](#)
[WSL0805R1500FTB](#) [WSL2010R0330FEB](#) [WSL1206R0650FTB](#) [WSL1206R0680FTB](#) [WSL1206-18 .002 1%TR](#)