


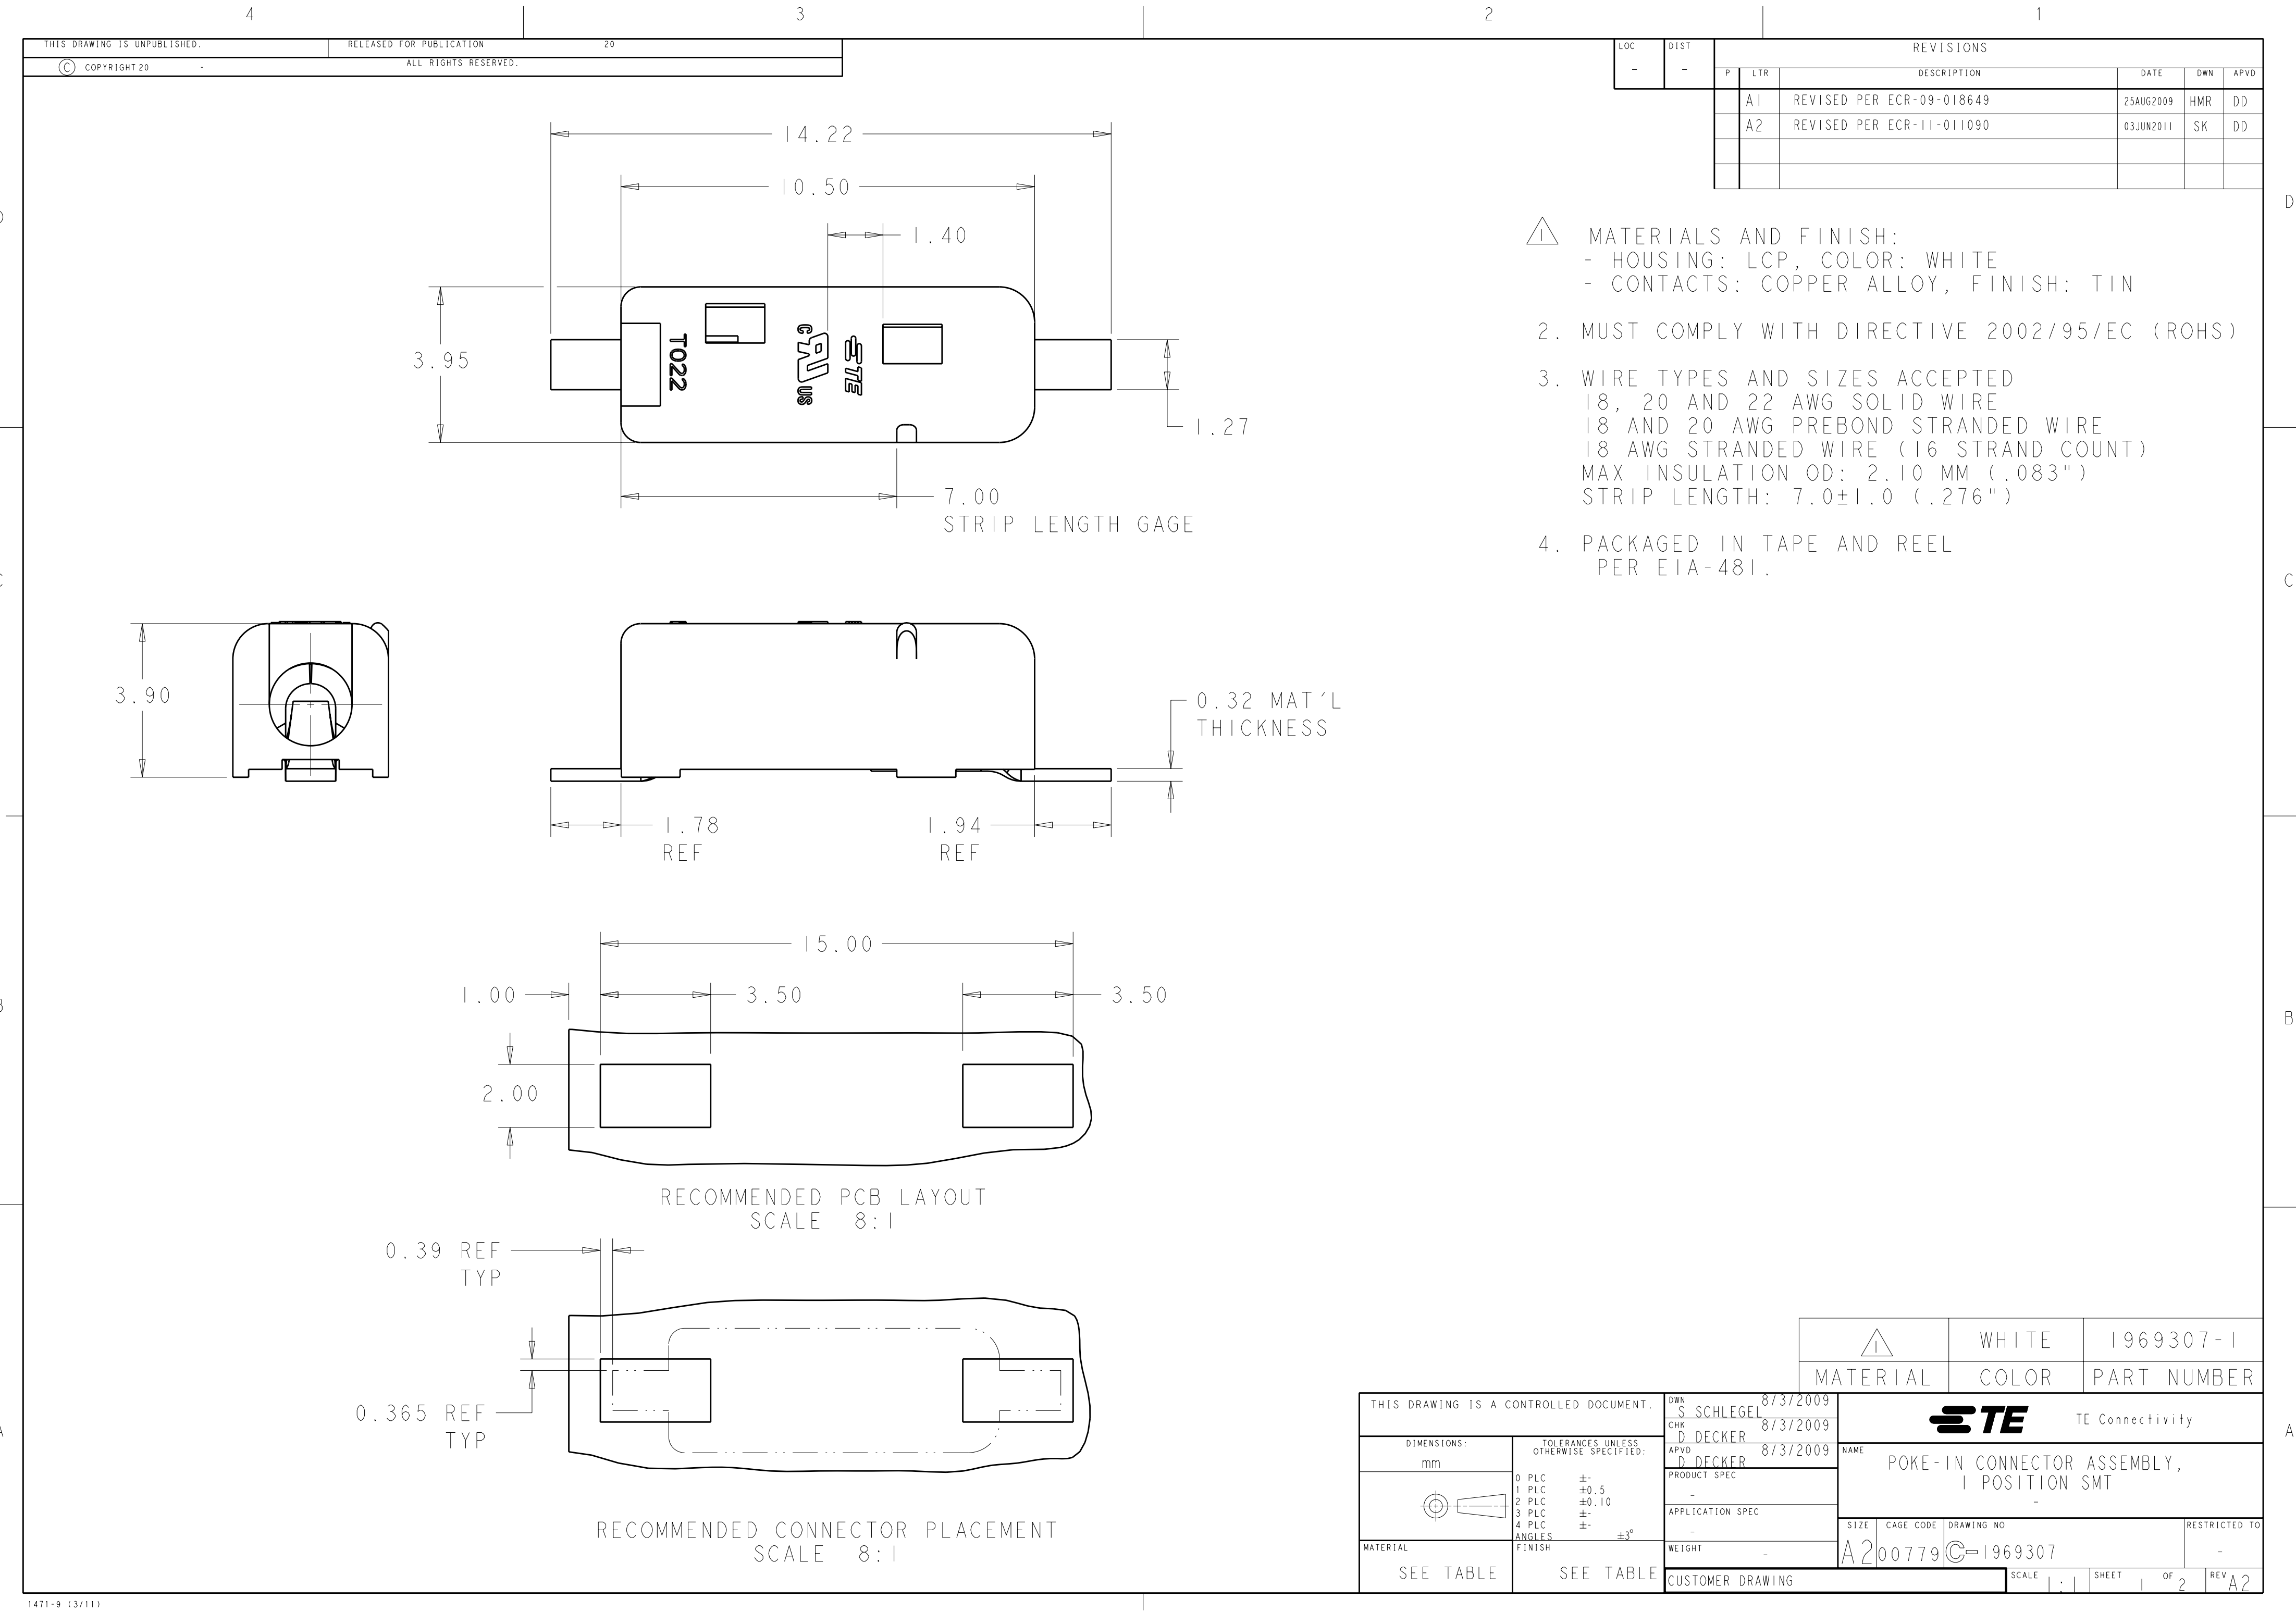


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
-	-		A1	REVISED PER ECR-09-018649	25AUG2009	HMR
			A2	REVISED PER ECR-11-011090	03JUN2011	SK


- ⚠ MATERIALS AND FINISH:
- HOUSING: LCP, COLOR: WHITE
- CONTACTS: COPPER ALLOY, FINISH: TIN
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. WIRE TYPES AND SIZES ACCEPTED
18, 20 AND 22 AWG SOLID WIRE
18 AND 20 AWG PREBOND STRANDED WIRE
18 AWG STRANDED WIRE (16 STRAND COUNT)
MAX INSULATION OD: 2.10 MM (.083")
STRIP LENGTH: 7.0±1.0 (.276")
4. PACKAGED IN TAPE AND REEL
PER EIA-481.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	8/3/2009	TE Connectivity POKE-IN CONNECTOR ASSEMBLY, 1 POSITION SMT		
DIMENSIONS:		CHK	8/3/2009			
mm		APVD	8/3/2009			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO
0 PLC	±			A2	00779	C-1969307
1 PLC	±0.5					
2 PLC	±0.10					
3 PLC	±					
4 PLC	±					
ANGLES	±3°					
FINISH						
MATERIAL		WEIGHT	-			
SEE TABLE	SEE TABLE	CUSTOMER DRAWING		SCALE	1:1	SHEET 1 OF 2

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	SEE SHEET 1	-	-	-	

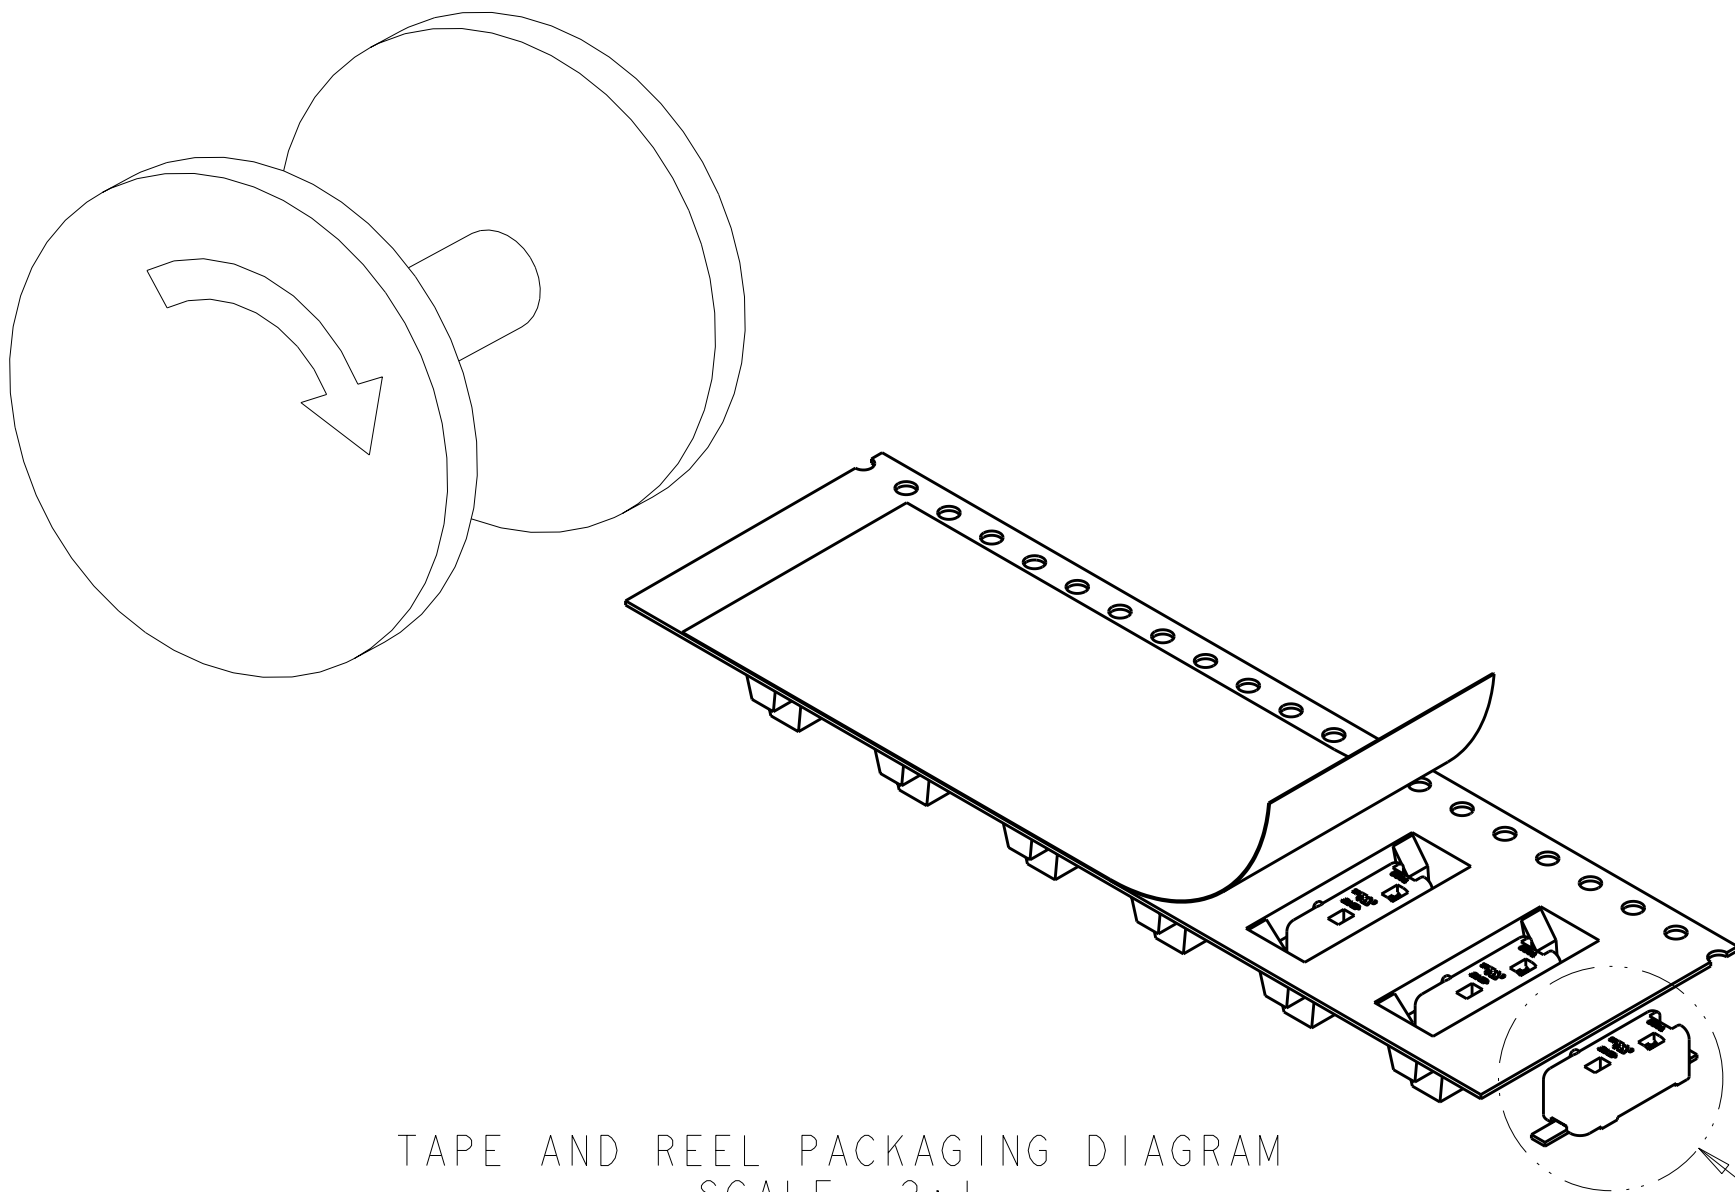


TAPE AND REEL PACKAGING DIAGRAM
SCALE 2:1

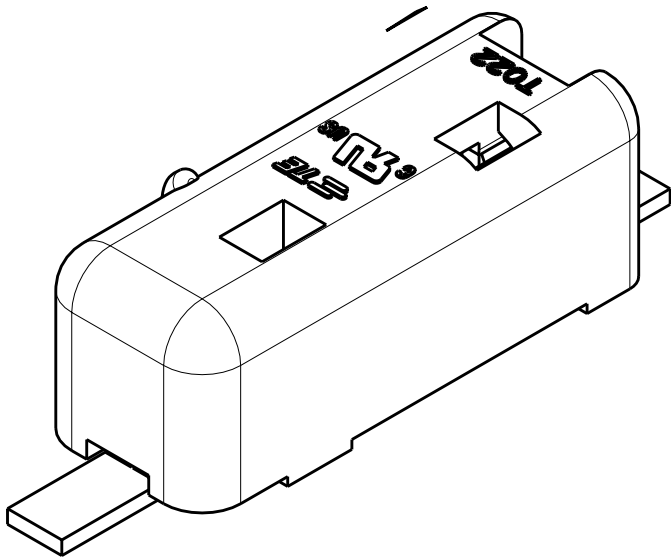

DETAIL A
SCALE 8:1

SEE DETAIL A

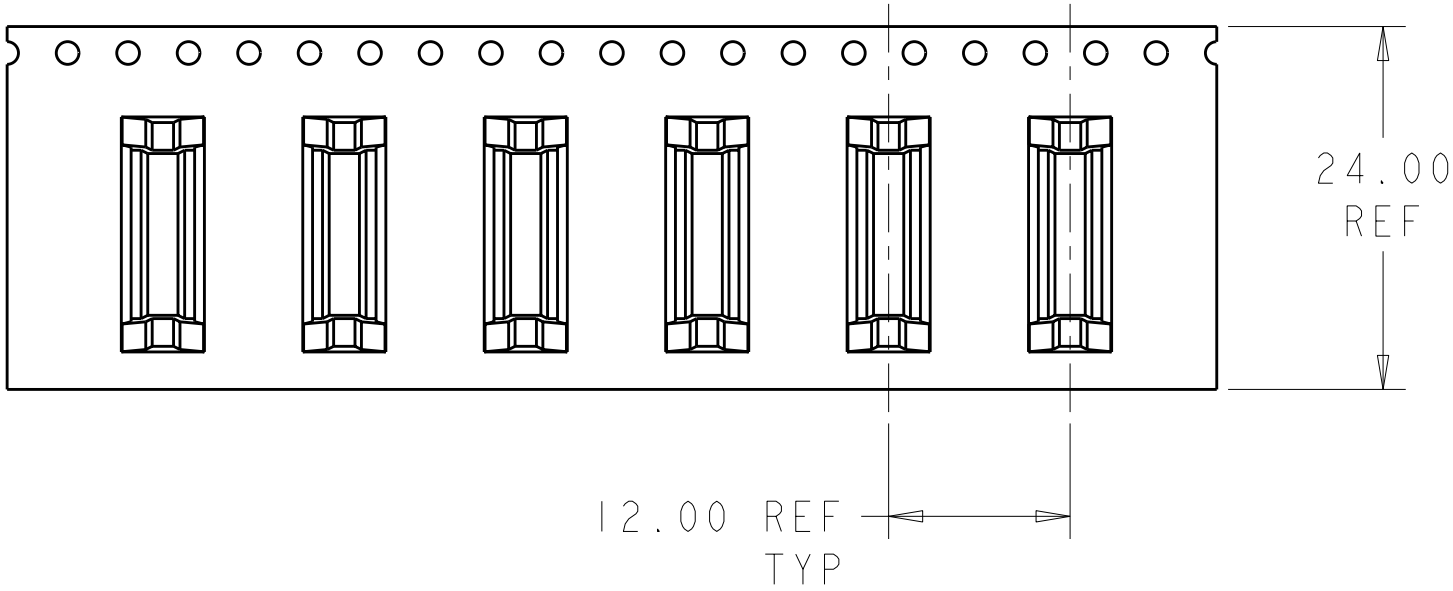

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 8/3/2009	TE Connectivity POKE-IN CONNECTOR ASSEMBLY, 1 POSITION SMT					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 	CHK D DECKER 8/3/2009						
		APVD D DECKER 8/3/2009						
		PRODUCT SPEC -						
MATERIAL SEE TABLE	0 PLC ± 1 PLC ±0.5 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±3° FINISH	APPLICATION SPEC -	NAME	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT -	A2	00779	C-1969307	-		
		CUSTOMER DRAWING	SCALE	10:1	SHEET	2 OF 2	REV	A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1969307-1](#)