

Data Sheet

Total Output Power: 450 - 550 Watts
 +12 Vdc main Output
 +3.3 Vdc Stand-by Output
 DC Input 36 - 75 Vdc

SPECIAL FEATURES

- 1U X 2U form factor
- 10.3 W/in³ (DS550) 8.4 W/in³ (DS450)
- +12 Vdc output
- +3.3 Vdc standby
- No minimum load required
- Hot plug operation
- N + 1 redundant
- Internal OR'ing fets
- Active current sharing
- Built-in cooling fans (40 mm x 28 mm)
- I²C communication interface bus
- EEPROM for FRU data
- Amber LED status, fan_fail
- Green LED status, power good/DC_OK status (VIN_GOOD)
- One year warranty

SAFETY

- UL/cUL 60950 (UL recognized)
- NEMKO+ CB report EN60950
- EN60950
- CE mark
- China CCC

DS450DC-3/DS550DC-3

Distributed Power Bulk Front-End



Electrical Specifications

Input	
Input range	36 - 75 Vdc
Frequency	DC input
Inrush current	21 A maximum
Efficiency	84% @ 75 Vdc
Conducted EMI	FCC Subpart J EN55022 Class A
Radiated EMI	FCC Subpart J EN55022 Class A
Power factor	N/A
Leakage current	N/A No touch current required.
Hold up time	1 ms minimum
Output	
Main DC voltage	+12 V
Standby	+3.3 Vsb
Adjustment range	Factory Set, no pot adjustments
Regulation	+12 Vdc; +5%/-5% +3.3 Vsb; +5%/-5%
Overcurrent	See Table 1 next page
Overvoltage	+12 Vdc; 13.5 - 15 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc
Undervoltage	+12 Vdc; 10.5 V - 11.0 V +3.3 Vsb; 2.77 - 3.00 Vdc
Turn-on delay	< 3 seconds
+12 V output rise time	3 ms - 300 ms

Logic Control	
PS_ON /L(Power supply enable)	The power supply output will be enabled when this signal is pulled low (< 0.8 V). HIGH = Output V1 OFF LOW = Output V1 ON
VIN_GOOD/H (Input OK)	Active High signal asserted when the input voltage rises above the min input voltage specified. This signal is internally pulled up through 4.7 K ohms to the 3.3 V housekeeping voltage.
POK/H (Output OK)	Active High signal asserted when the output is within regulation. This signal is internally pulled up through 1.0 K ohms to the 3.3 V housekeeping voltage.
TACH_1	This open collector signal generates two pulses per each fan revolution. This signal is eternally pulled up to the housekeeping voltage.
PS_KILL	This signal will cause the output to shut down when drive high (> 24 V) or left floating. The PS_KILL will cause the output to latch off and requires recycle of PS_ON or DC input to reset.


Environmental Specifications	
Operating temperature	+10 °C to +45 °C, able to start-up at -10 °C
Storage temperature	-40 °C to +70 °C
Altitude, operating	10,000 ft.
Electromagnetic susceptibility/Input transients	- EN61000-3-2, -3-3 - EN61000-4-2, 4.3, 4-4, -4-5, 4-11 - EN55024:1998
RoHS & lead-free compliant (no tantalum caps.)	
Humidity	20 to 90% RH, non-condensing
Shock and vibration specifications complies with Astec Std. Specifications.	
MTBF (calculated)	500k hours at full load, 25 °C

Ordering Information								
Output	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Over Current	Options
DS450DC-3	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	37.0 A 3.0 A	120 mV 60 mV	39.5 - 44.4% 4.9 A Avg, 7 A max	Standard
DS450DC-3-002	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	37.0 A 3.0 A	120 mV 60 mV	39.5 - 44.4% 4.9 A Avg, 7 A max	Reverse Air
DS550DC-3	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	45.0 A 3.0 A	120 mV 60 mV	48.0A - 54.0A 4.9 A Avg, 7 A max	Standard
DS550DC-3-003	12.0 Vdc 3.3 Vsb	± 0.2% ± 1%	+5/-3% +5/-4%	0 A 0 A	45.0 A 3.0 A	120 mV 60 mV	48.0A - 54.0A 4.9 A Avg, 7 A max	Reverse Air

*Over current latches off if overcurrent lasts over 1 second, otherwise it is auto recovery.

*For 5 Vsb, please contact marketing department.

Mechanical Drawing

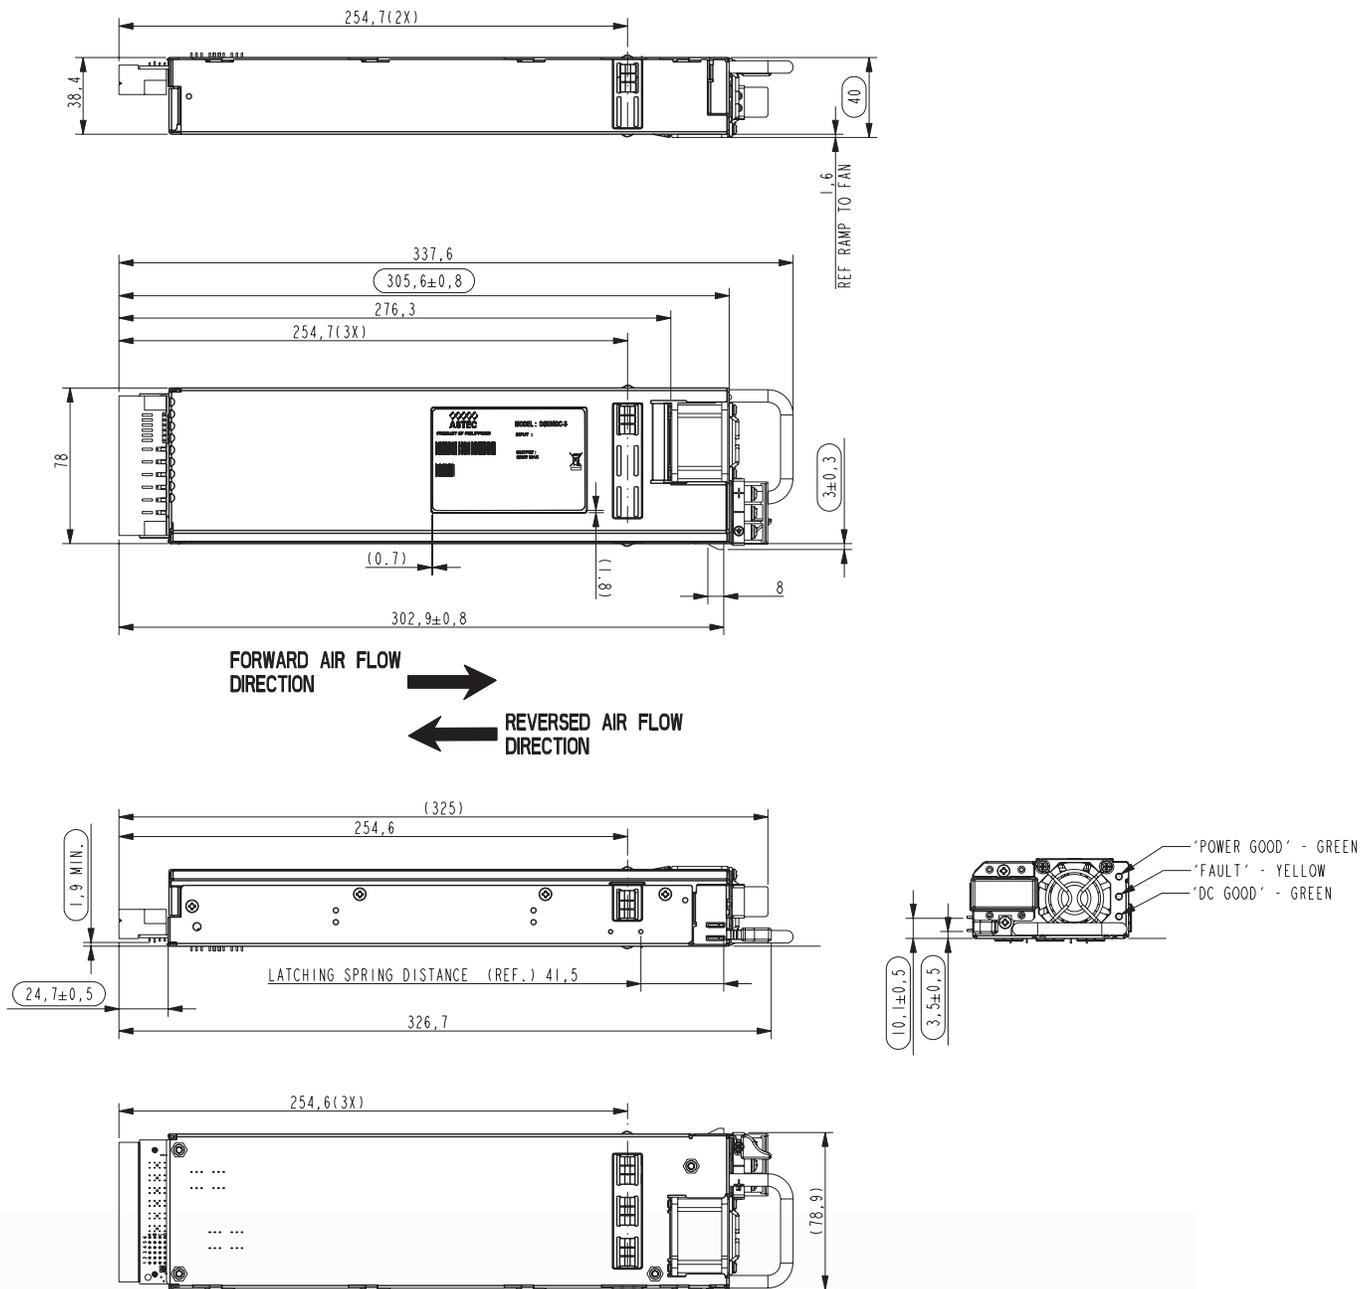

DC Output Connector Pinout Assignment

Male connector as viewed from the rear of the supply:

D1	D2	D3	D4	D5	D6	PB1	PB2	PB3	PB4	PB5	PB6
C1	C2	C3	C4	C5	C6						
B1	B2	B3	B4	B5	B6						
A1	A2	A3	A4	A5	A6						

P1 - Power Supply Side

1	FCI Power Blade 51721 series 51721-10002406AA
2	Molex Power Connector SD-87667 series 87667-7002

Mating Connector (System Side)

1	FCI Power Blade 51741-10002406CC Strait Pins
2	FCI Power Blade 51761-10002406AA Right Angle

Pin Assignments

Pin	Signal Name
PB 1	+12 V Return
PB 2	+12 V Return
PB 3	+12 V Return
PB 4	+12 V
PB 5	+12 V
PB 6	+12 V
A1	PS_KILL
A2	+12 V_Current Share
A3	Return
A4	Write Protect
A5	PS A0
A6	+3.3 V SB
B1	Return
B2	12 V RTN Sense
B3	Return
B4	+3.3 V SB
B5	SDA
B6	-PS_ON/L

Pin Assignments

Pin	Signal Name
C1	Return
C2	Tach_1
C3	Return
C4	+3.3 V SB
C5	SCL*
C6	VIN_GOOD/H
D1	-Present/L
D2	+12 V_Sense
D3	Return
D4	+3.3 V SB
D5	Alert/L (S_INT)
D6	POK/H (PWROK/H)

*Supports I²C standard mode (100 kHz) only

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

DS450DC-3/DS550DC-3-DS 05Dec2019

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[DS550DC-3-004](#)