
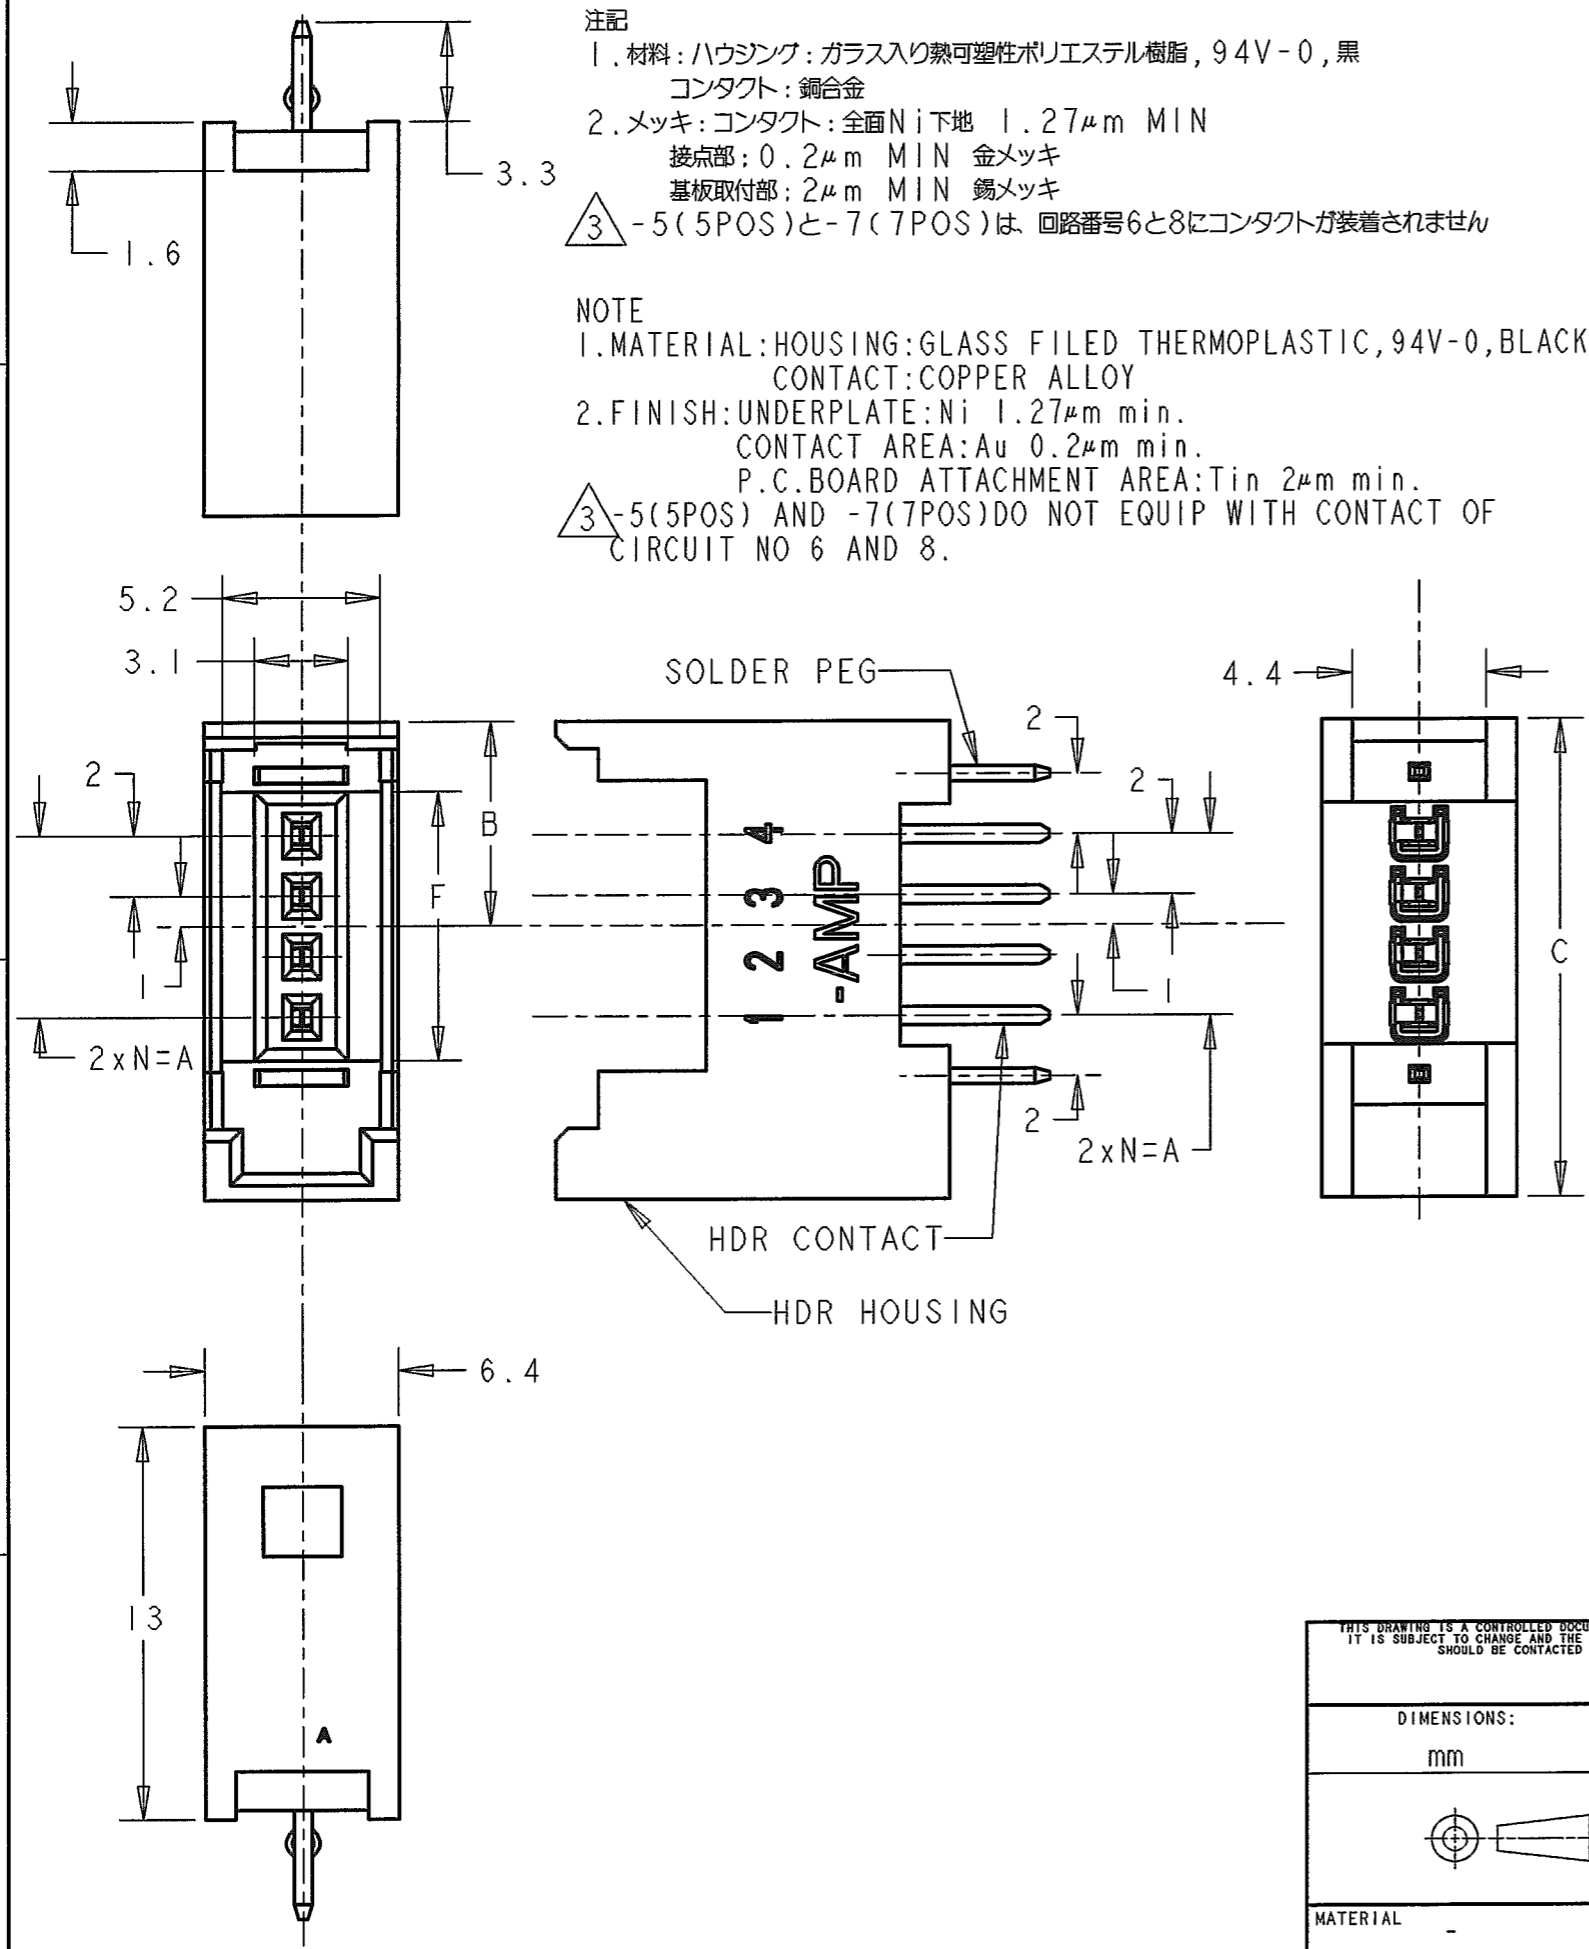


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	-	0	RELEASED	FJ00-1726-01	10SEP2001	D.M S.M
		A	ADD P/N	FJ00-1227-02	10MAY2002	D.M S.M
		AI	REVISED	FJ00-2030-02	27SEP2002	D.M S.M
		B	REVISED	FJ00-0125-03	24FEB04	K.R K.S

注記
 1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂, 94V-0, 黒
 コンタクト:銅合金
 2. メッキ:コンタクト:全面Ni下地 1.27μm MIN
 接点部:0.2μm MIN 金メッキ
 基板取付部:2μm MIN 錫メッキ
 △3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません

NOTE
 1. MATERIAL:HOUSING:GLASS FILED THERMOPLASTIC, 94V-0, BLACK
 CONTACT:COPPER ALLOY
 2. FINISH:UNDERPLATE:Ni 1.27μm min.
 CONTACT AREA:Au 0.2μm min.
 P.C. BOARD ATTACHMENT AREA:Tin 2μm min.
 △3 -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF
 CIRCUIT NO 6 AND 8.

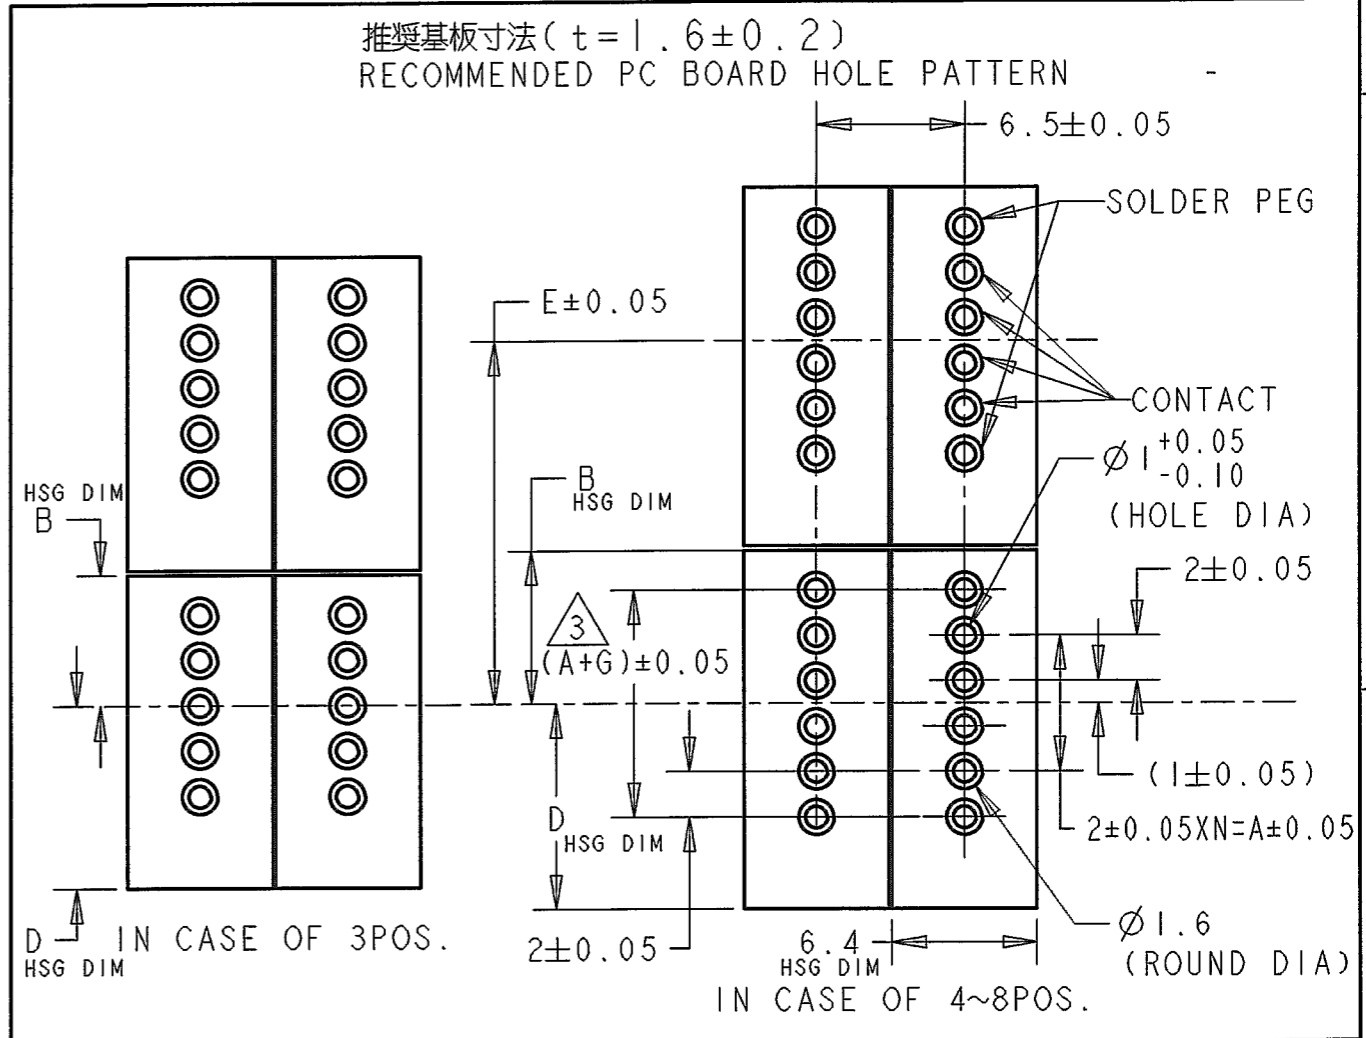

△3	4	16.9	24	13.05	23.8	10.75	14	7	8	1473565-8
△3	6	16.9	24	13.05	23.8	10.75	12	7	7	1473565-7
	4	12.9	20	11.05	19.8	8.75	10	5	6	1473565-6
	6	12.9	20	11.05	19.8	8.75	8	5	5	1473565-5
	4	8.9	16	9.05	15.8	6.75	6	3	4	1473565-4
	4	6.9	14	8.05	13.8	5.75	4	2	3	1473565-3
	G	F	E	D	C	B	A	N	POS	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN D. MITSUGI	10SEP2001	Tyco Electronics AMP K.K. Kawasaki, Japan
DIMENSIONS: mm		CHK S. MANABE	10SEP2001	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± ±0.2 1 PLC ± ±0.2 2 PLC ± ±3° 3 PLC ± ±3° 4 PLC ± ± ANGLES ± ±		APVD S. MANABE	10SEP2001	NAME HDR-ASSY(IROW) FOR E-CON - RITS CONN. -
MATERIAL -		PRODUCT SPEC 108-5765	APPLICATION SPEC -	
FINISH -		WEIGHT -	SIZE A3	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO. C=1473565	RESTRICTED TO -
			SCALE 4:1	SHEET 1 OF 1
				REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1473565-5](#)