



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DF	X0		L	REV PER ECO-08-029134	01JUN10	PY	JG

ASSEMBLED VIEW

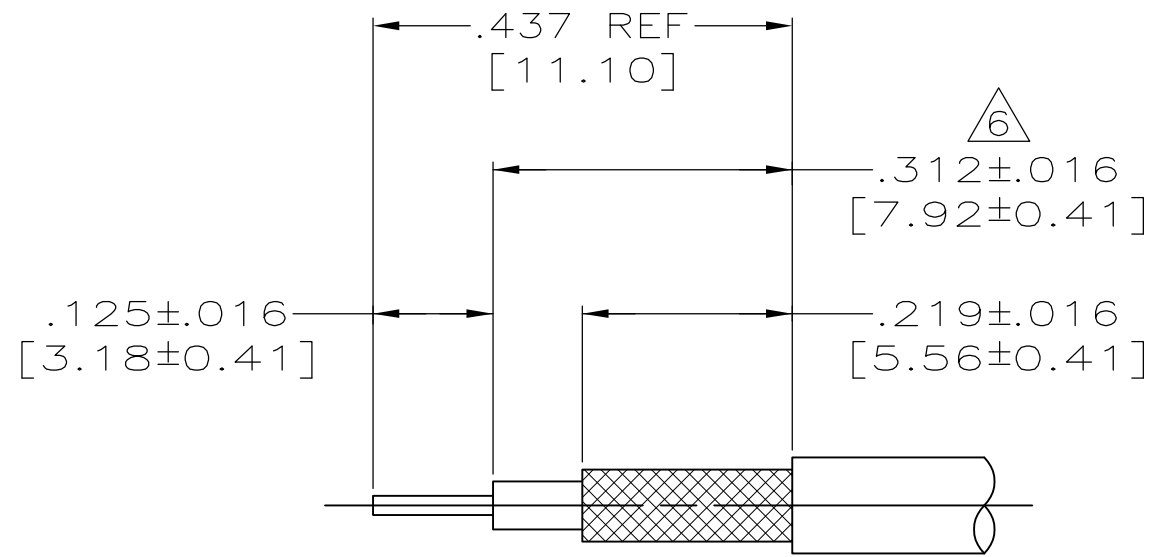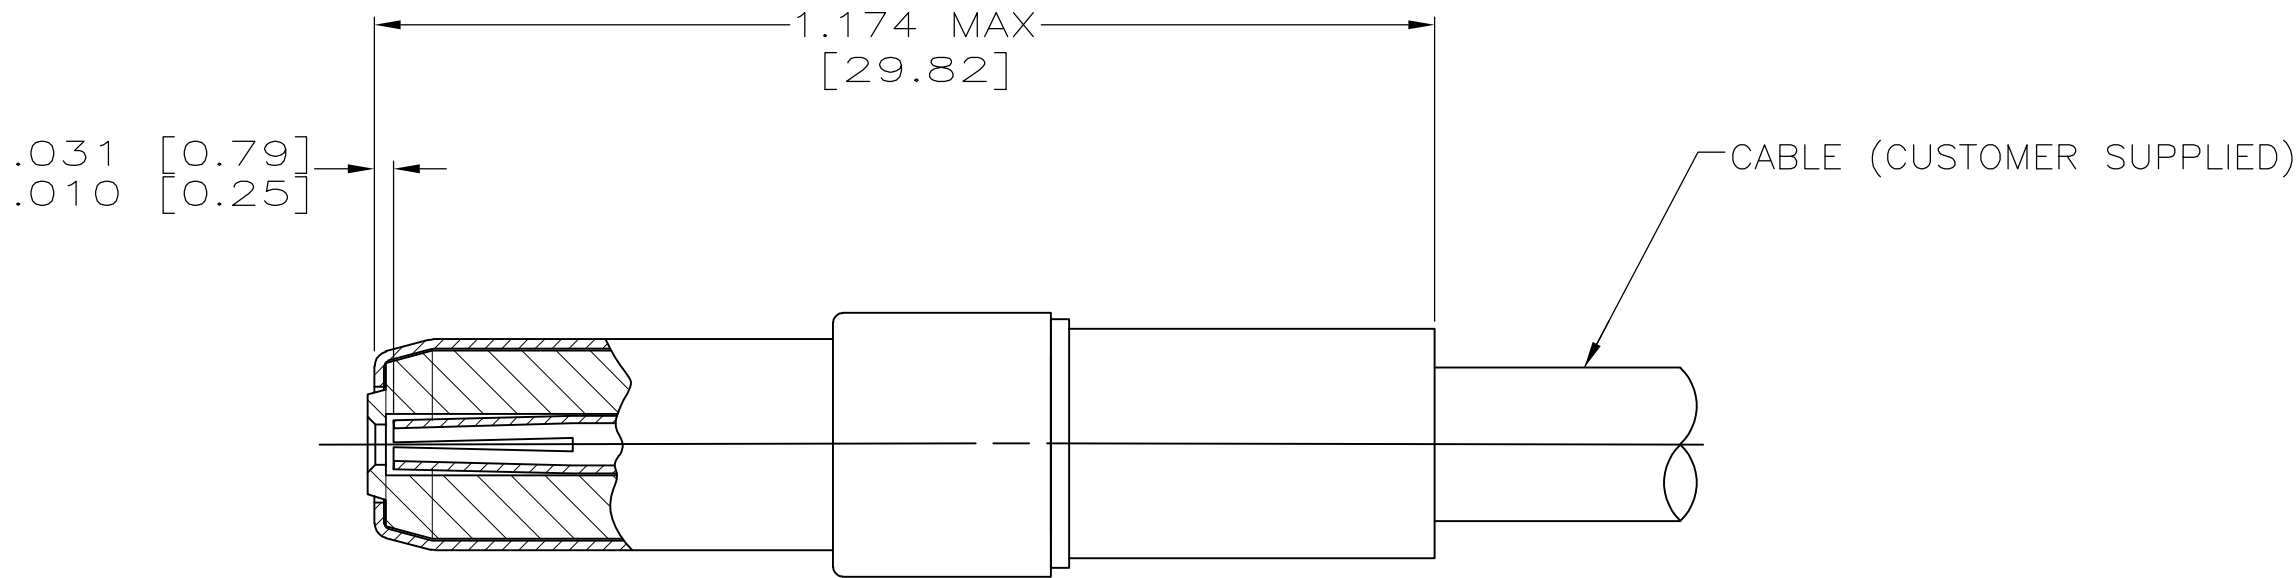

RECOMMENDED STRIP LENGTH
SCALE: N.T.S.

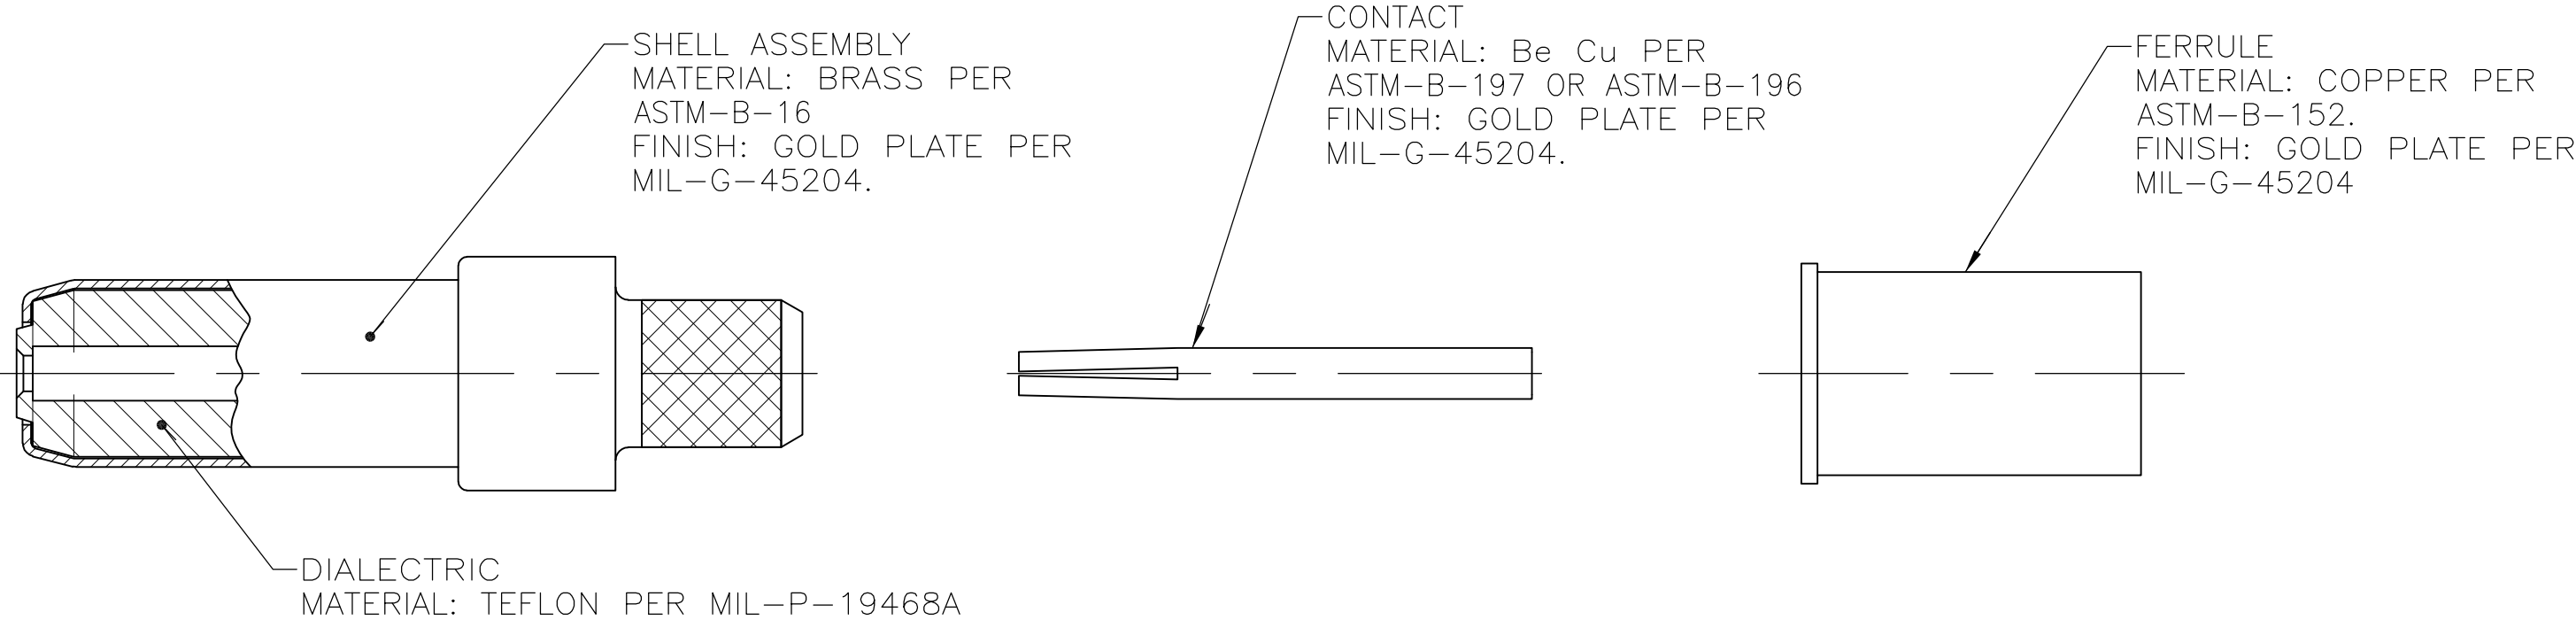

- FOR USE WITH RG-58C/U, 141/AU, CABLE
- FERRULE CRIMPING TOOL:220066-2,CRIMP B OR 220009-1 OR 220066-1,CRIMP B.
- CONTACT CRIMPING TOOL:M22520/2-01 OR AMP TOOL NUMBER 601966-1, SETTING NUMBER 5. DANIELS POSITIONER PART NO. K345 OR AMP TOOL NO. 1-601966-6.
- SEE I.S.2348.
- DANIELS MANUFACTURING CORP
2266 FRANKLIN ROAD
BLOOMFIELD HILLS, MI 48013

- △6 OUTER JACKET OF CABLE MUST BE TRIMMED TO ALLOW PROPER INTER-PIN CONTACT LOCATION AFTER FERRULE CRIMP OPERATION.
- PARTS SHIPPED UNASSEMBLED AND CABLE IS SUPPLIED BY CUSTOMER.

225790-1

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 9-12-94	 Tyco Electronics Corporation Harrisburg, PA 17105-3608				
		CHK J.CABARLO 9-23-94					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD —	NAME CONNECTOR,COAXIAL,RF PIN SIZE 5, ARINC —				
	0 PLC ± —	PRODUCT SPEC —					
	1 PLC ± —	—					
	2 PLC ± —	APPLICATION SPEC					
	3 PLC ± —	—					
4 PLC ± —	ANGLES ± ±	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL	FINISH	WEIGHT —	A2	00779	C=225790-1	—	
SEE CALLOUTS	SEE CALLOUTS	CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[225790-1](#)