


# USB Connector B Type Receptacle Vertical Single Deck Thru-hole

154-UBS21-E

**KOBI**CONN

USB Connector B Type Receptacle Vertical Single Deck Thru-hole

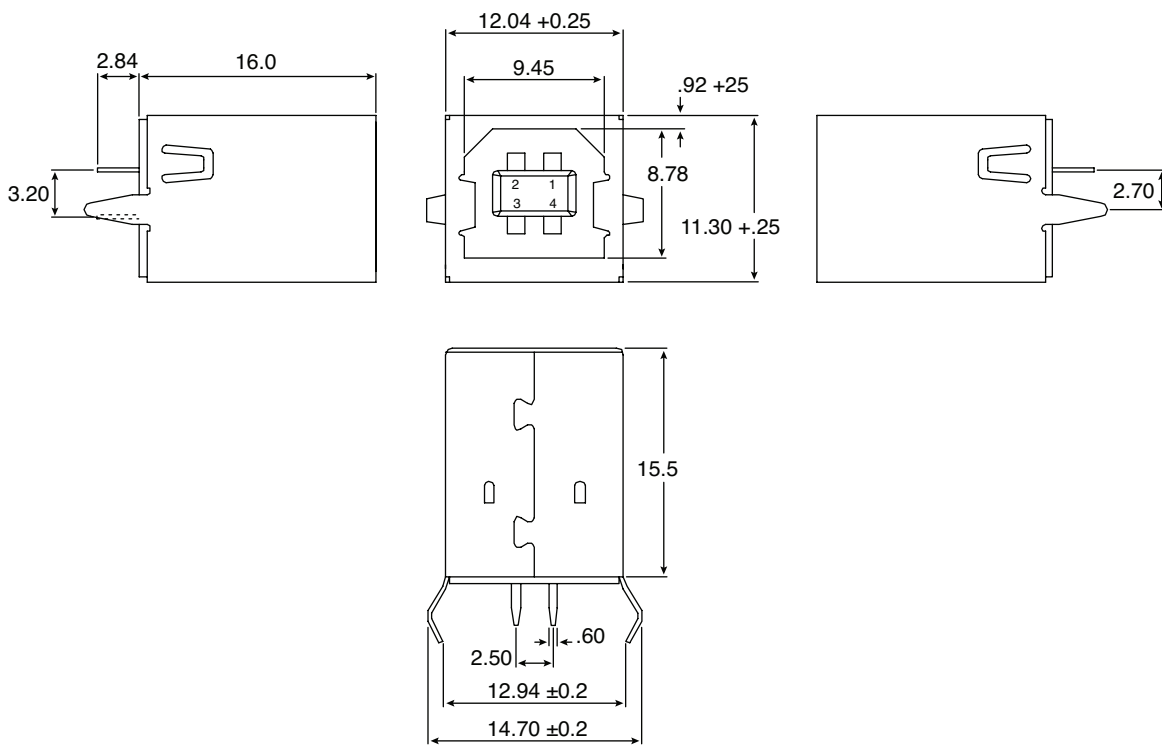

Dimensions: mm

## SPECIFICATIONS

Part Name	Item	Qty.	Material
<b>Contacts:</b>	3	4	Copper Alloy/Selective Gold Plating: 2 - $4\mu 5\mu$ "; 5 - $4\mu 30\mu$ "
<b>Housing:</b>	2	1	Thermoplastic, Glass filled, 240°C
<b>Shell:</b>	1	1	Copper Alloy/ Tin-Lead Plated over Copper
RoHS Compliant			

## Electrical Specifications

<b>Contact Resistance:</b>	30 Milliohms max.
<b>Dielectric w/standing Voltage:</b>	500 VAC
<b>Insulator Resistance:</b>	1,000 Megaohms min.
<b>Current Rating:</b>	1.5 Ampere max. @ 30°C
<b>Temperature Range:</b>	-55°C to +85°C
<b>Voltage:</b>	30 VAC
<b>Capacitance:</b>	2 Picofarads max @ 1KHz

Date Last Revised: 7-12-06

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-301015

154-UBS21-E

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[154-UBS21-E](#)