

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705550043

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 9 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400-001 (PDF)

Product Specification PS-70541-001 (PDF)

Product Specification TS-70541-100-001 (PDF)

Packaging Specification PK-70873-0015 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179


General

Product Family	PCB Headers
Series	70555
Application	Signal, Wire-to-Board
Overview	SL Modular Connectors
Product Name	SL
UPC	800753624214

Physical

Breakaway	No
Circuits (Loaded)	9
Circuits (maximum)	9
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.998/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

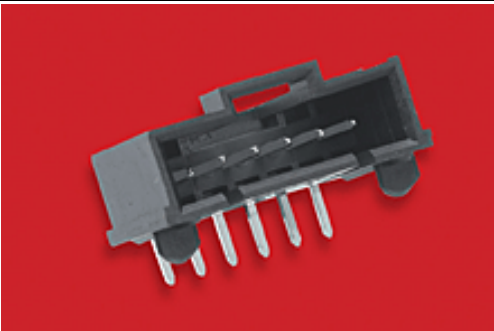

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

70555 Series

Mates With

SL Crimp Housing 70066 Option N, 70066
Option G, 70430 Option G, 70400 Option G

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	001
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Engineering Number	A-70555-0043
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0015
Product Specification	PS-70400-001, PS-70541-001, TS-70541-100-001
Sales Drawing	705550000-SD-000

This document was generated on 11/05/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[70555-0043](#)