

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0755561501

Status:

Active

Overview:

EXTreme PowerMass High-Current Connectors

Description:

EXTreme PowerMass 0.13mm Pitch, 150A Module, 1 Circuit, Right-Angle Plug, Long Blade Type, Tail Length 3.81mm, Lead-Free, No Pegs

Documents:


3D Model

Application Specification AS-75541-100-001 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	75556
Application	Board-to-Board, Power
Comments	150A Module Tin Tails
Overview	EXTreme PowerMass High-Current Connectors
Product Name	EXTreme PowerMass
UPC	800756930794
Physical	
(p)ower-(s)ignal Configuration	1p - 0s
Breakaway	No
Circuits (Loaded)	1
Circuits (maximum)	1
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Copper-Nickel-Silicon
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	20.860/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.81mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	2.40mm
Packaging Type	Tray
Pitch - Mating Interface	N/A
Pitch - Termination Interface	1.60mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	No
Polarized to PCB	Yes
Shrouded	Closed Ends
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

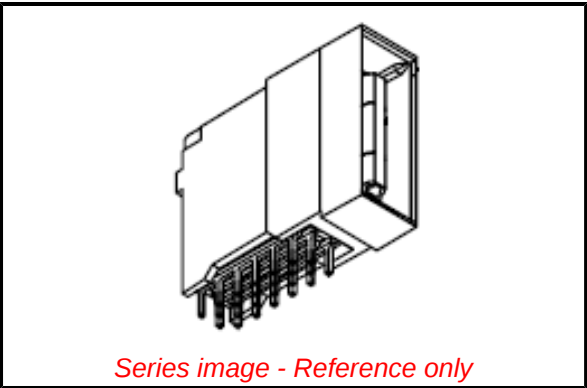

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

75556 Series

Mates With

75545-5000 EXTreme PowerMass Receptacle, 75545-5001 EXTreme PowerMass Receptacle

Electrical

Current - Maximum per Contact	150.0A
Voltage - Maximum	600V

Material Info

Reference - Drawing Numbers

Application Specification	AS-75541-100-001
Sales Drawing	SD-75556-100

This document was generated on 10/08/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[75556-1501](#)