
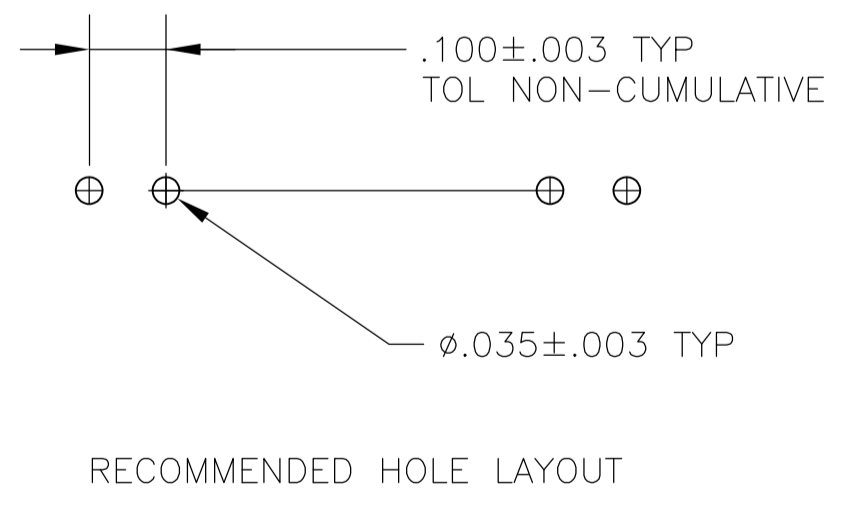


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PARTS PACKAGED IN GPAX
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

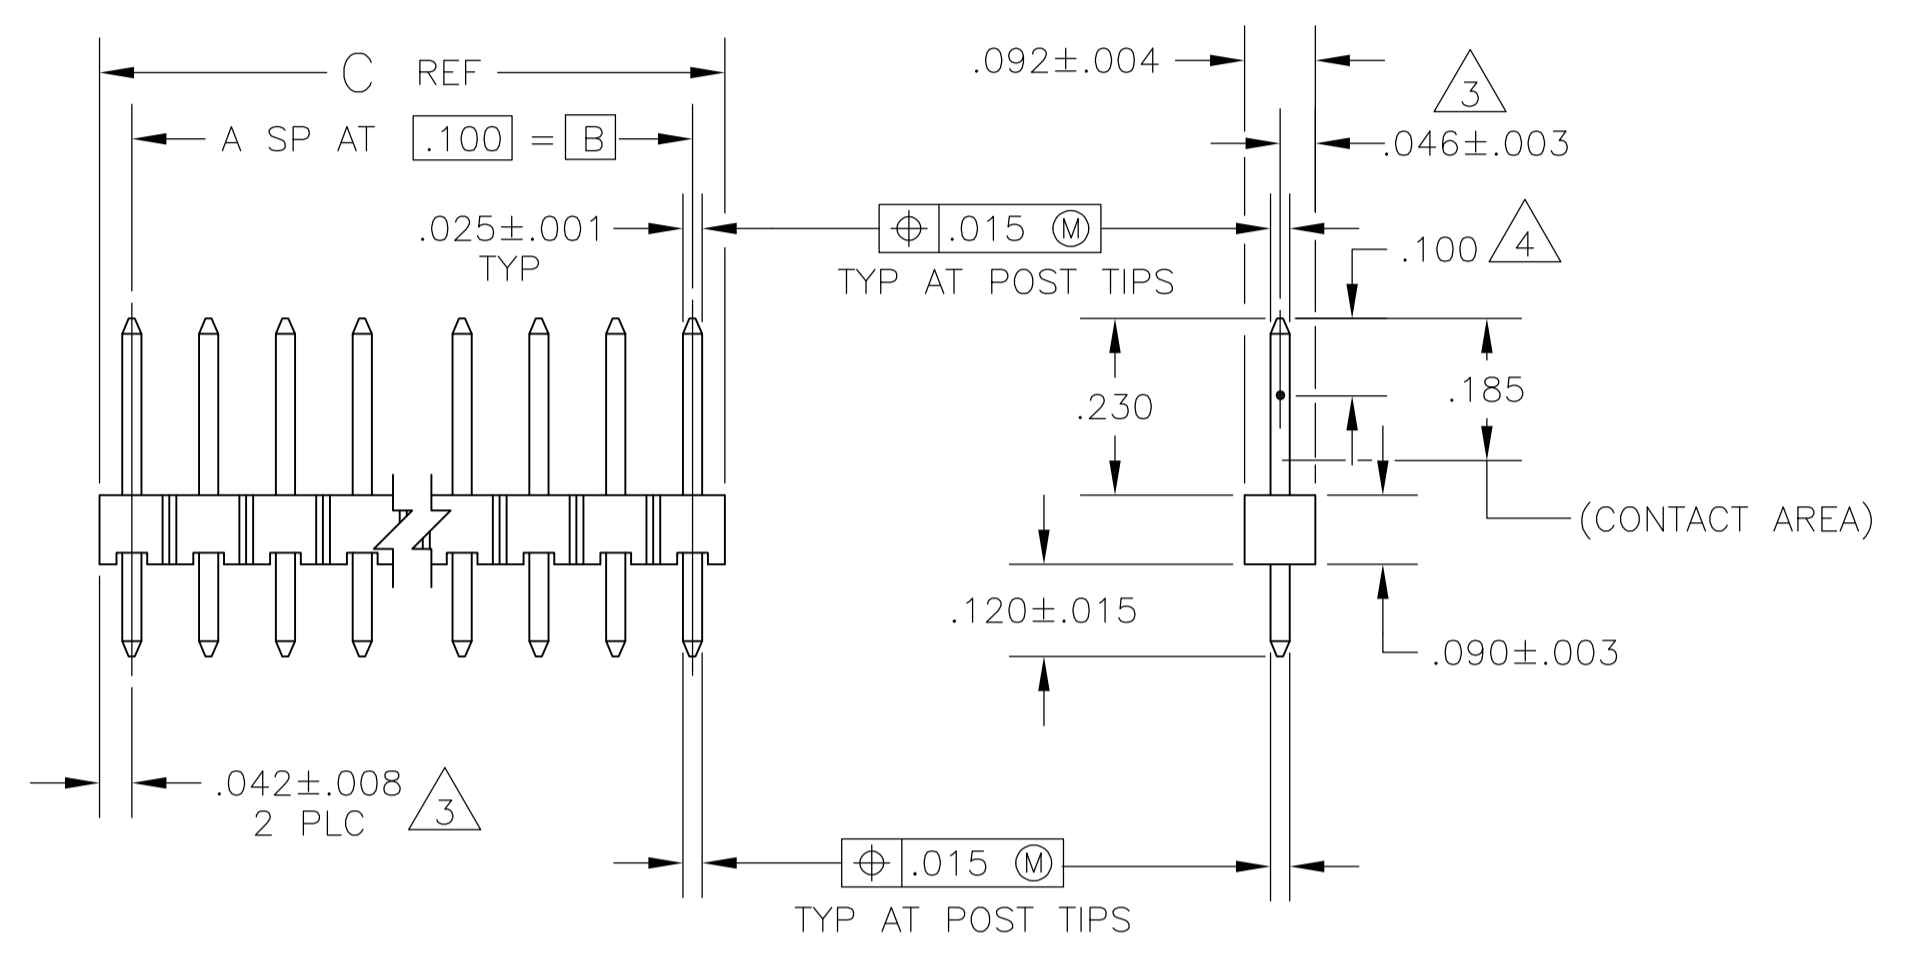

OBSOLETE	.284	.200	2	3	4-103239-2
	3.984	3.900	39	40	4-103239-0
OBSOLETE	3.884	3.800	38	39	3-103239-9
	3.784	3.700	37	38	3-103239-8
	3.684	3.600	36	37	3-103239-7
	3.584	3.500	35	36	3-103239-6
	3.484	3.400	34	35	3-103239-5
	3.384	3.300	33	34	3-103239-4
	3.284	3.200	32	33	3-103239-3
	3.184	3.100	31	32	3-103239-2
	3.084	3.000	30	31	3-103239-1
	2.984	2.900	29	30	3-103239-0
	2.884	2.800	28	29	2-103239-9
	2.784	2.700	27	28	2-103239-8
	2.684	2.600	26	27	2-103239-7
	2.584	2.500	25	26	2-103239-6
	2.484	2.400	24	25	2-103239-5
	OBSOLETE	2.384	2.300	23	24
2.284		2.200	22	23	2-103239-3
2.184		2.100	21	22	2-103239-2
2.084		2.000	20	21	2-103239-1
1.984		1.900	19	20	2-103239-0
1.884		1.800	18	19	1-103239-9
1.784		1.700	17	18	1-103239-8
1.684		1.600	16	17	1-103239-7
1.584		1.500	15	16	1-103239-6
1.484		1.400	14	15	1-103239-5
SUPERSEDED BY 6-146281-3	1.384	1.300	13	14	1-103239-4
	1.284	1.200	12	13	1-103239-3
OBSOLETE	1.184	1.100	11	12	1-103239-2
	1.084	1.000	10	11	1-103239-1
	.984	.900	9	10	1-103239-0
	.884	.800	8	9	103239-9
	.784	.700	7	8	103239-8
	.684	.600	6	7	103239-7
	.584	.500	5	6	103239-6
	.484	.400	4	5	103239-5
	.384	.300	3	4	103239-4
	.284	.200	2	3	103239-3
	.184	.100	1	2	103239-2
	.084	—	—	1	103239-1
	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN H MOLL 13OCT87	STE TE Connectivity	
DIMENSIONS: INCHES		CHK T. CLARK 20OCT87		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. CLARK 20OCT87	NAME	
0 PLC ± -	1 PLC ± -	HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS		
2 PLC ± -	3 PLC ± .005	PRODUCT SPEC		
4 PLC ± -	ANGLES ± -	APPLICATION SPEC		
MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY		FINISH: POSTS: .00020 GOLD ON CONTACT AREA .00010-0.00050 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL	SIZE: A1	WEIGHT: —
RESTRICTED CUSTOMER		DRAWING NO: 00779	SCALE: 4:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103239-2](#)