SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA C22.2, # 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP/40°C, 120/250VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.21mA @ 120V, 60Hz 0.36mA @ 250V, 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir. IN AN AMBIENT, T₀, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I₀, IS AS FOLLOWS: I $_{-}$ = I $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_{-}$ $_$ 100 - T_o

RELIABILITY SPECIFICATIONS: STORAGE TEMPERATURE: -40°C TO +85°C

HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR B ZECONDS

TEST SPECIFICATIONS:

INDUCTANCE: 4.56mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

0.0056µF ±20% 2.0014µF ±20% LINE TO GROUND: LINE TO LINE: DISCHARGE RESISTOR: 165K .c.

L/G AND L/L T.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,

20°C AND 50% RH

CATALOG # 20EP1

ECD # APPRVD. DATE
PJD 30DEC08


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500VAC OR 2250VDC FOR 1 MINUTE

LINE TO LINE: 1450VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

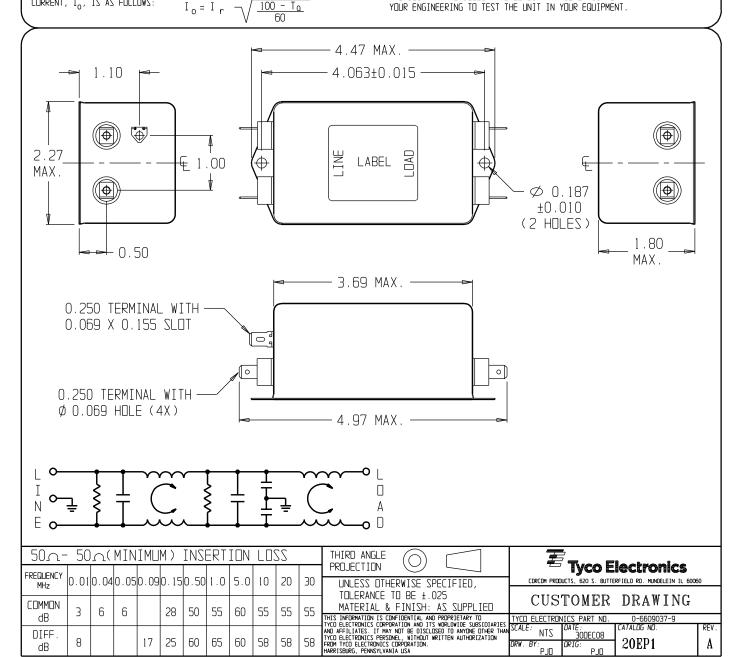

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{TE Connectivity}}{\frac{20\text{EP1}}{}}$