

EM2665 Series EuroMag Terminal Blocks

5.00 Centers

SPECIFICATIONS

Rating: 10A, 300V

Center Spacing: 0.197" (5.00mm)

Wire Range: #14-26 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Brass Tin-Plated

Screw Size: M2.6 Zinc-Plated Steel

Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.

Torque Rating: 4 lb-in.

Recommended PCB Hole Diameters: 0.055" (1.40mm)

Construction: Mold to Length

Connector Style: Spring and Screw

Agency Information:  File E62622; CE Certified




EM266512

Position	L (mm)	Position	L (mm)
02	10.0	14	70.0
03	15.0	15	75.0
04	20.0	16	80.0
05	25.0	17	85.0
06	30.0	18	90.0
07	35.0	19	95.0
08	40.0	20	100.0
09	45.0	21	105.0
10	50.0	22	110.0
11	55.0	23	115.0
12	60.0	24	120.0
13	65.0		

To convert to inches, divide by 25.4

Dimensions - in (mm)

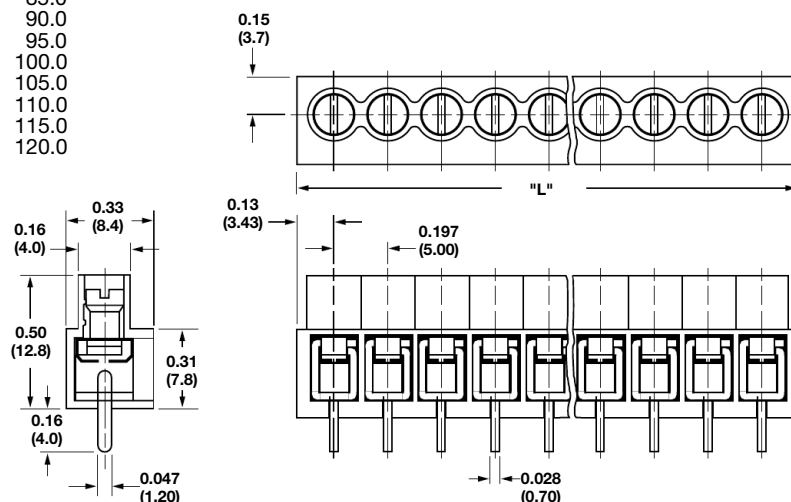

Part Numbering System

Series

of Positions

EM2665

02 to 24

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[EM266502](#) [EM266503](#) [EM266504](#) [EM266506](#) [EM266507](#) [EM266508](#) [EM266510](#) [EM266511](#) [EM266505](#)
[EM266519](#) [EM266524](#) [EM266514](#) [EM266509](#) [EM266513](#) [EM266523](#) [EM266520](#) [EM266518](#) [EM266512](#)
[EM266517](#) [EM266521](#) [EM266522](#) [EM266515](#) [EM266516](#)