

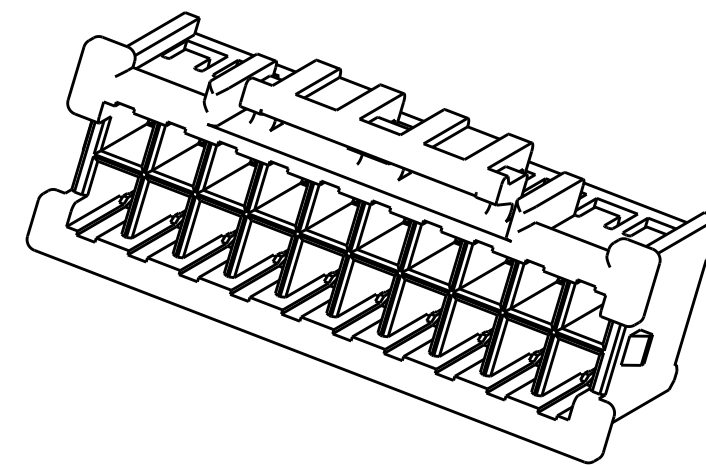




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		B	REVISED PER ECR-16-000965	04MAY16	O.C	D.Z

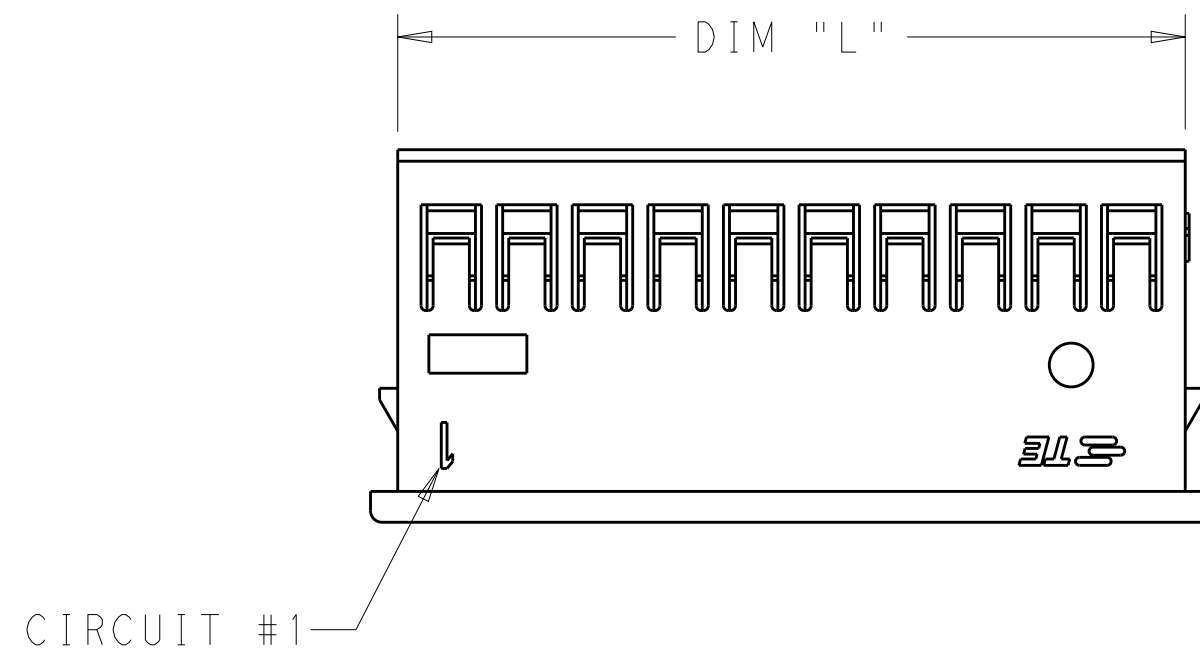

3D REAR VIEW
20 POSITION SHOWN

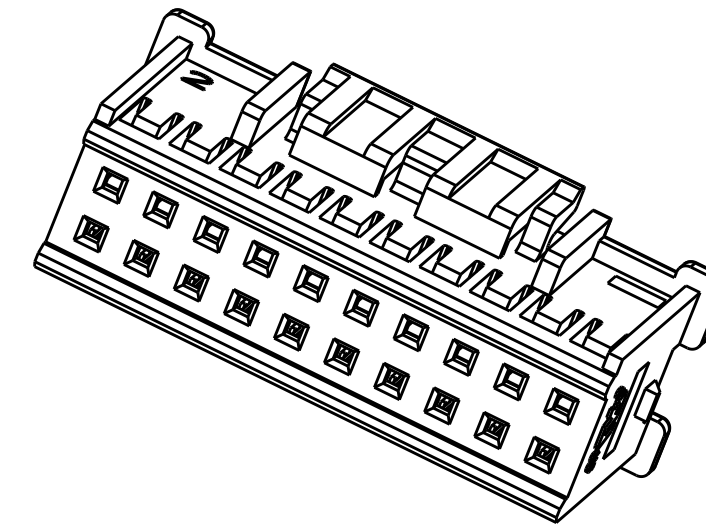

3D MATING FACE VIEW
20 POSITION SHOWN

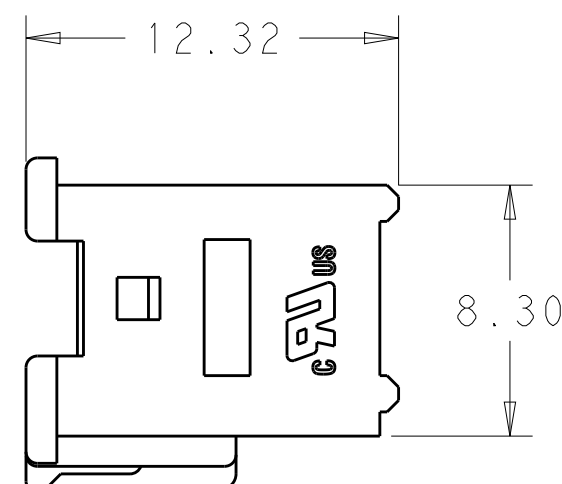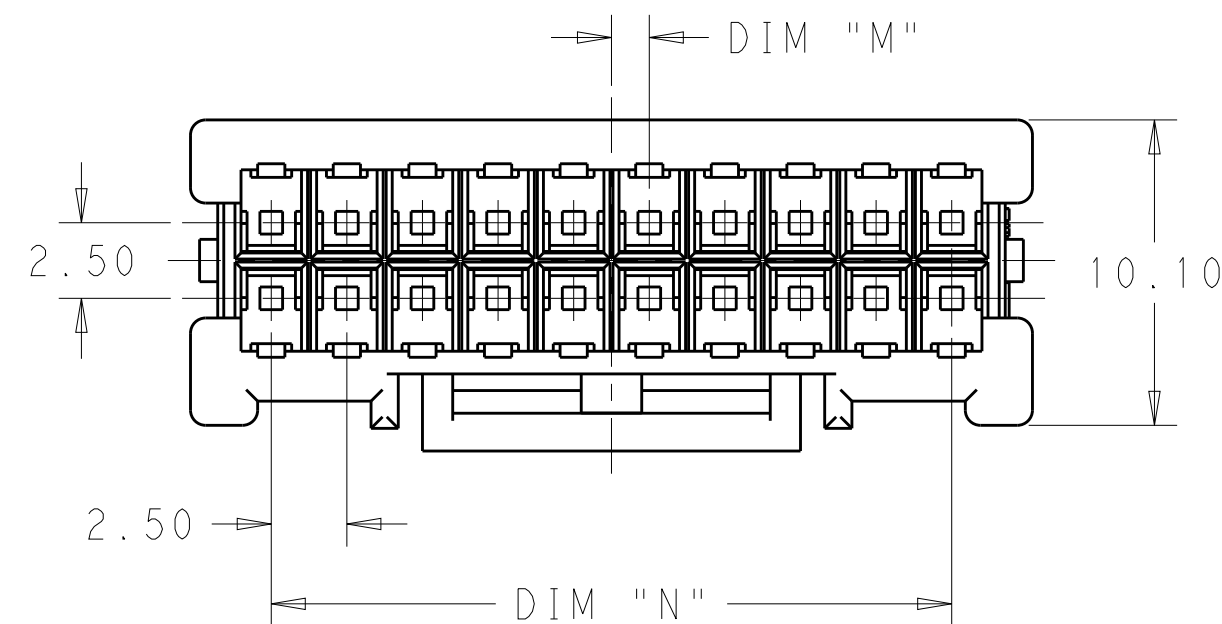


△ MATERIAL: NYLON, UL94V-0, FLAME REDARDANT,
COLOR: NATURAL.


2 PARTS TESTED TO IEC 60695-2-11 AND IS COMPLIANT
TO IEC 60335-1.

3 HOUSING, MATERIAL MEETS MINIMUM GLOW WIRE
FLAMMIBILITY INDEX OF 850°C PER IEC 60695-2-12
AND MINIMUM GLOW WIRE IGNITION TEMP OF
775°C PER IEC 60695-2-13.

4 SEE SHEET 2 FOR LATCH DESIGN ON THE
DIFFERENT PART NUMBERS.

	1.25	2	47.50	51.04	4-1969567-0
	0.00	2	45.00	48.54	3-1969567-8
	1.25	2	42.50	46.04	3-1969567-6
	0.00	2	40.00	43.54	3-1969567-4
	1.25	2	37.50	41.04	3-1969567-2
	0.00	2	35.00	38.54	3-1969567-0
	1.25	2	32.50	36.04	2-1969567-8
	0.00	2	30.00	33.54	2-1969567-6
	1.25	2	27.50	31.04	2-1969567-4
	0.00	2	25.00	28.54	2-1969567-2
	1.25	2	22.50	26.04	2-1969567-0
	0.00	2	20.00	23.54	1-1969567-8
4	1.25	1	17.50	21.04	1-1969567-6
4	0.00	1	15.00	18.54	1-1969567-4
4	1.25	1	12.50	16.04	1-1969567-2
4	0.00	1	10.00	13.54	1-1969567-0
4	1.25	1	7.50	11.04	1969567-8
	DIM "M"	NO. OF LATCH CUT-OUTS	DIM "N"	DIM "L"	PART NO.

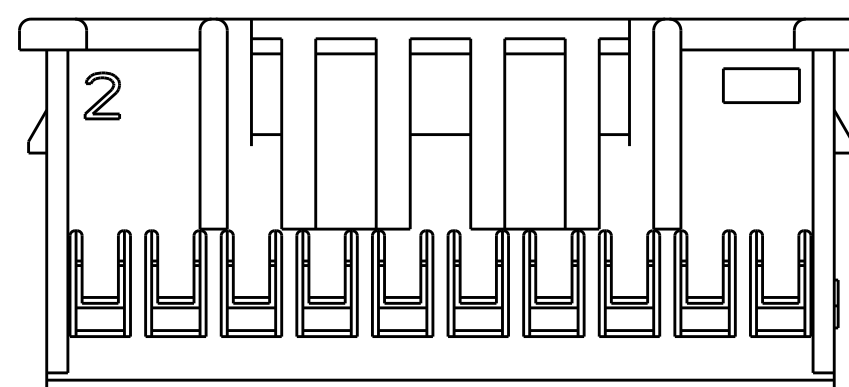

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01OCT2012 CHK JR RUTH		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME HOUSING, SOCKET, E.P. 2.5, DUAL ROW, GLOW WIRE	
		PRODUCT SPEC 108-2418		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL 		APPLICATION SPEC 114-13315		A200779 C-1969567	
SEE NOTES		WEIGHT -		SHEET 1 OF 2 REV B	
CUSTOMER DRAWING				SCALE N/A	

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
			-		SEE SHEET 1		-	-	-

D

D

C







C

B

B

A

A

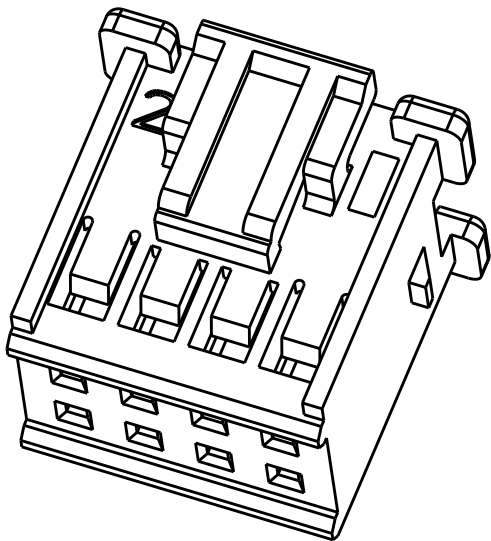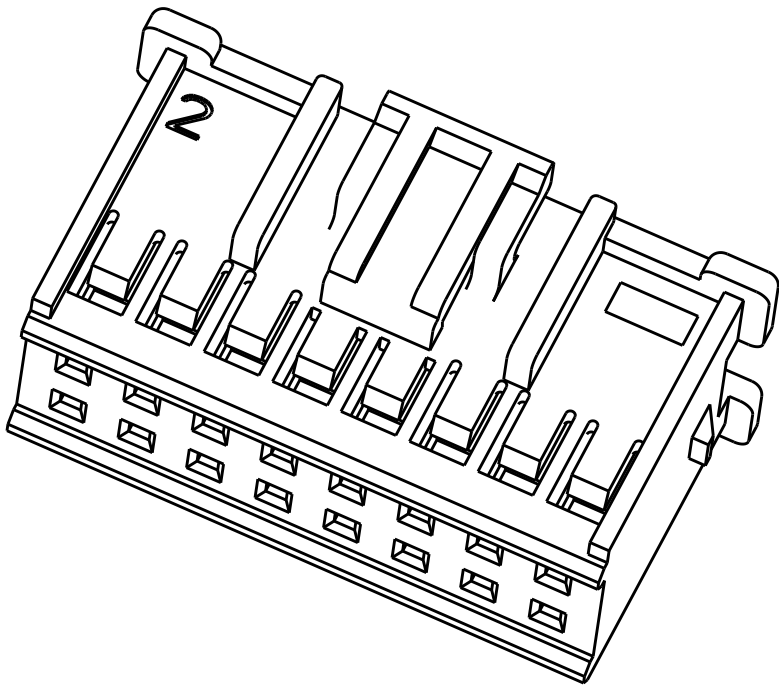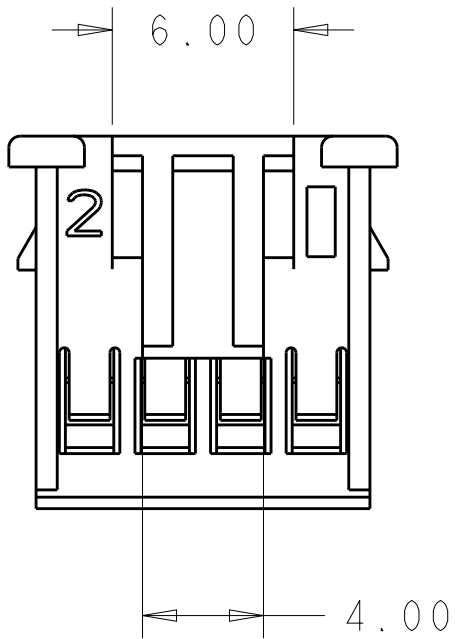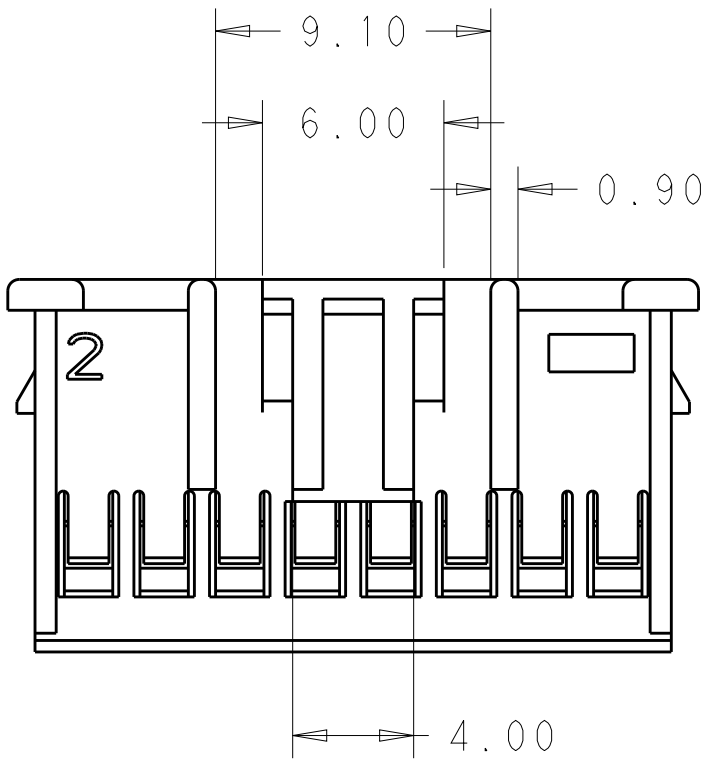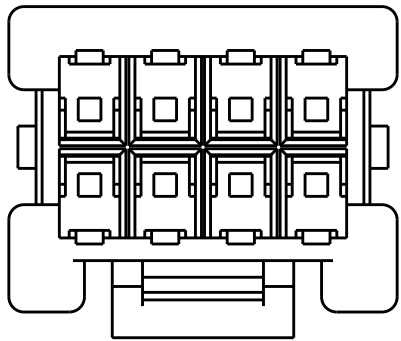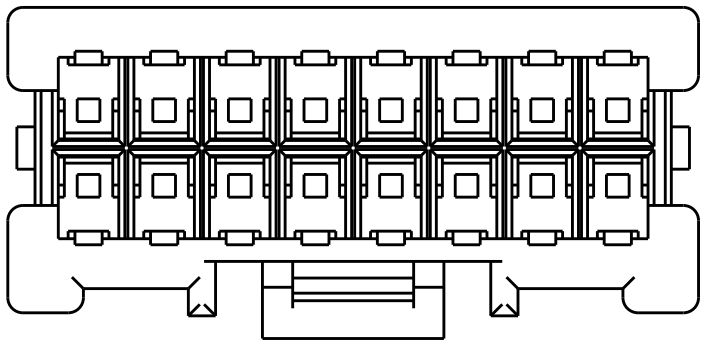

SINGLE LATCH DETAIL
1-1969567-6 SHOWN HERE
THESE DIM'S ARE FOR THE
1-1969567-2 THRU -16

SINGLE LATCH DETAIL
1969567-8 SHOWN HERE
THESE DIM'S ARE FOR THE
1969567-8 AND 1-1969567-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH	01OCT2012	TE Connectivity			
DIMENSIONS: mm		CHK KURT RANDOLPH	01OCT2012				
		APVD KURT RSNDOLPH	01OCT2012	NAME HOUSING, SOCKET, E.P. 2.5, DUAL ROW, GLOW WIRE			
		PRODUCT SPEC 108-2418		SIZE A2	CAGE CODE 00779	DRAWING NO C-1969567	RESTRICTED TO -
MATERIAL SEE NOTES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		APPLICATION SPEC 114-13315	WEIGHT -	SCALE N/A	
		CUSTOMER DRAWING		SHEET 2		OF 2	REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1969567-6](#)