

**Micro Commercial Components** 



Micro Commercial Components 20736 Marilla Street Chatsworth

CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

## **BAT54WX**


## **Features**

- Extremely-Fast Switching Speed
- Low Forward Voltage Drop
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking Code: JV
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF"


# **Maximum Ratings**

| Symbol           | Rating                                 | Rating        | Unit       |  |
|------------------|--|---------------|------------|--|
| $V_{RRM}$        | Peak Repetitive Reverse Voltage        |               |            |  |
| $V_{RWM}$        | Working Peak Reverse Voltage           | 30 V          |            |  |
| $V_R$            | DC Blocking Voltage                    |               |            |  |
| I <sub>F</sub>   | Forward Current                        | 200           | mA         |  |
| R <sub>+JA</sub> | Thermal Resistance Junction to Ambient | 635           | °C/W       |  |
| P <sub>D</sub>   | Power dissipation                      | 200 mW        |            |  |
| $T_J$            | Junction Temperature                   | -65 to +150 ℃ |            |  |
| T <sub>STG</sub> | Storage Temperature                    | -65 to +150   | $^{\circ}$ |  |
| I <sub>FRM</sub> | Repetitive peak forward current        | 300           | mA         |  |
| I <sub>FSM</sub> | Peak forward current 9t=1us)           | 600           | mA         |  |

# 200mWatt, 30Volt **Schottky Diodes**

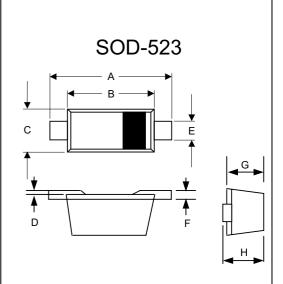

| DIMENSIONS |           |      |      |      |      |
|------------|-----------|------|------|------|------|
|            | INCHES MM |      |      |      |      |
| DIM        | MIN       | MAX  | MIN  | MAX  | NOTE |
| Α          | .059      | .067 | 1.50 | 1.70 |      |
| В          | .043      | .051 | 1.10 | 1.30 |      |
| С          | .030      | .033 | 0.75 | 0.85 |      |
| D          | .001      | .003 | 0.01 | 0.07 |      |
| Е          | .010      | .014 | 0.25 | 0.35 |      |
| F          | .003      | .006 | 0.08 | 0.15 |      |
| G          | .020      | .028 | 0.50 | 0.70 |      |
| П          | 020       | 024  | 0.51 | 0.77 |      |




## Electrical Characteristics @ 25°C Unless Otherwise Specified

| Symbol          | Parameter                          | Min | Max                                       | Test Conditions   |
|-----------------|------------------------------------|-----|---|---|
| $V_{(BR)}$      | Reverse Breakdown Voltage          | 30V |   | I <sub>R</sub> =10 μ A  |
| I <sub>R</sub>  | Reverse Voltage Leakage<br>Current |     | 2 µ A                                     | V <sub>R</sub> =25V   |
| V <sub>F</sub>  | Forward Voltage                    |     | 0.24V<br>0.50V<br>0.80V<br>0.32V<br>0.40V | I <sub>F</sub> =0.1mA<br>I <sub>F</sub> =30mA<br>I <sub>F</sub> =100mA<br>I <sub>F</sub> =1.0mA<br>I <sub>F</sub> =10mA |
| C <sub>T</sub>  | Total Capacitance                  |     | 10pF                                      | V <sub>R</sub> =1V, f=1MHZ  |
| t <sub>rr</sub> | Reverse Recovery Time              |     | 5ns                                       | I <sub>rr</sub> =10mA,I <sub>R</sub> =10mA~1<br>mA  |

# **BAT54WX**




**Micro Commercial Components** 

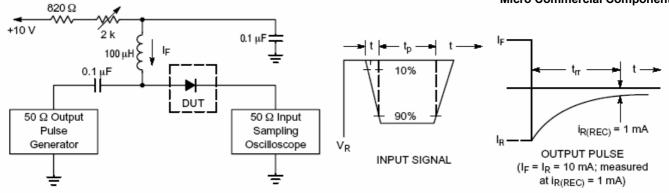

Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I<sub>F</sub>) of 10 mA.

- 2. Input pulse is adjusted so IR(peak) is equal to 10 mA.
- 3. t<sub>p</sub> » t<sub>rr</sub>

Figure 1. Recovery Time Equivalent Test Circuit

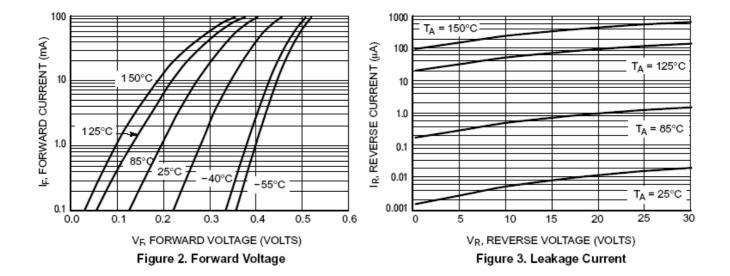

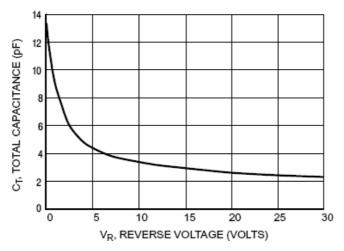


Figure 4. Total Capacitance



#### **Micro Commercial Components**

### **Ordering Information:**

| Device         | Packing               |
|----------------|-----------------------|
| Part Number-TP | Tape&Reel: 8Kpcs/Reel |

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.