
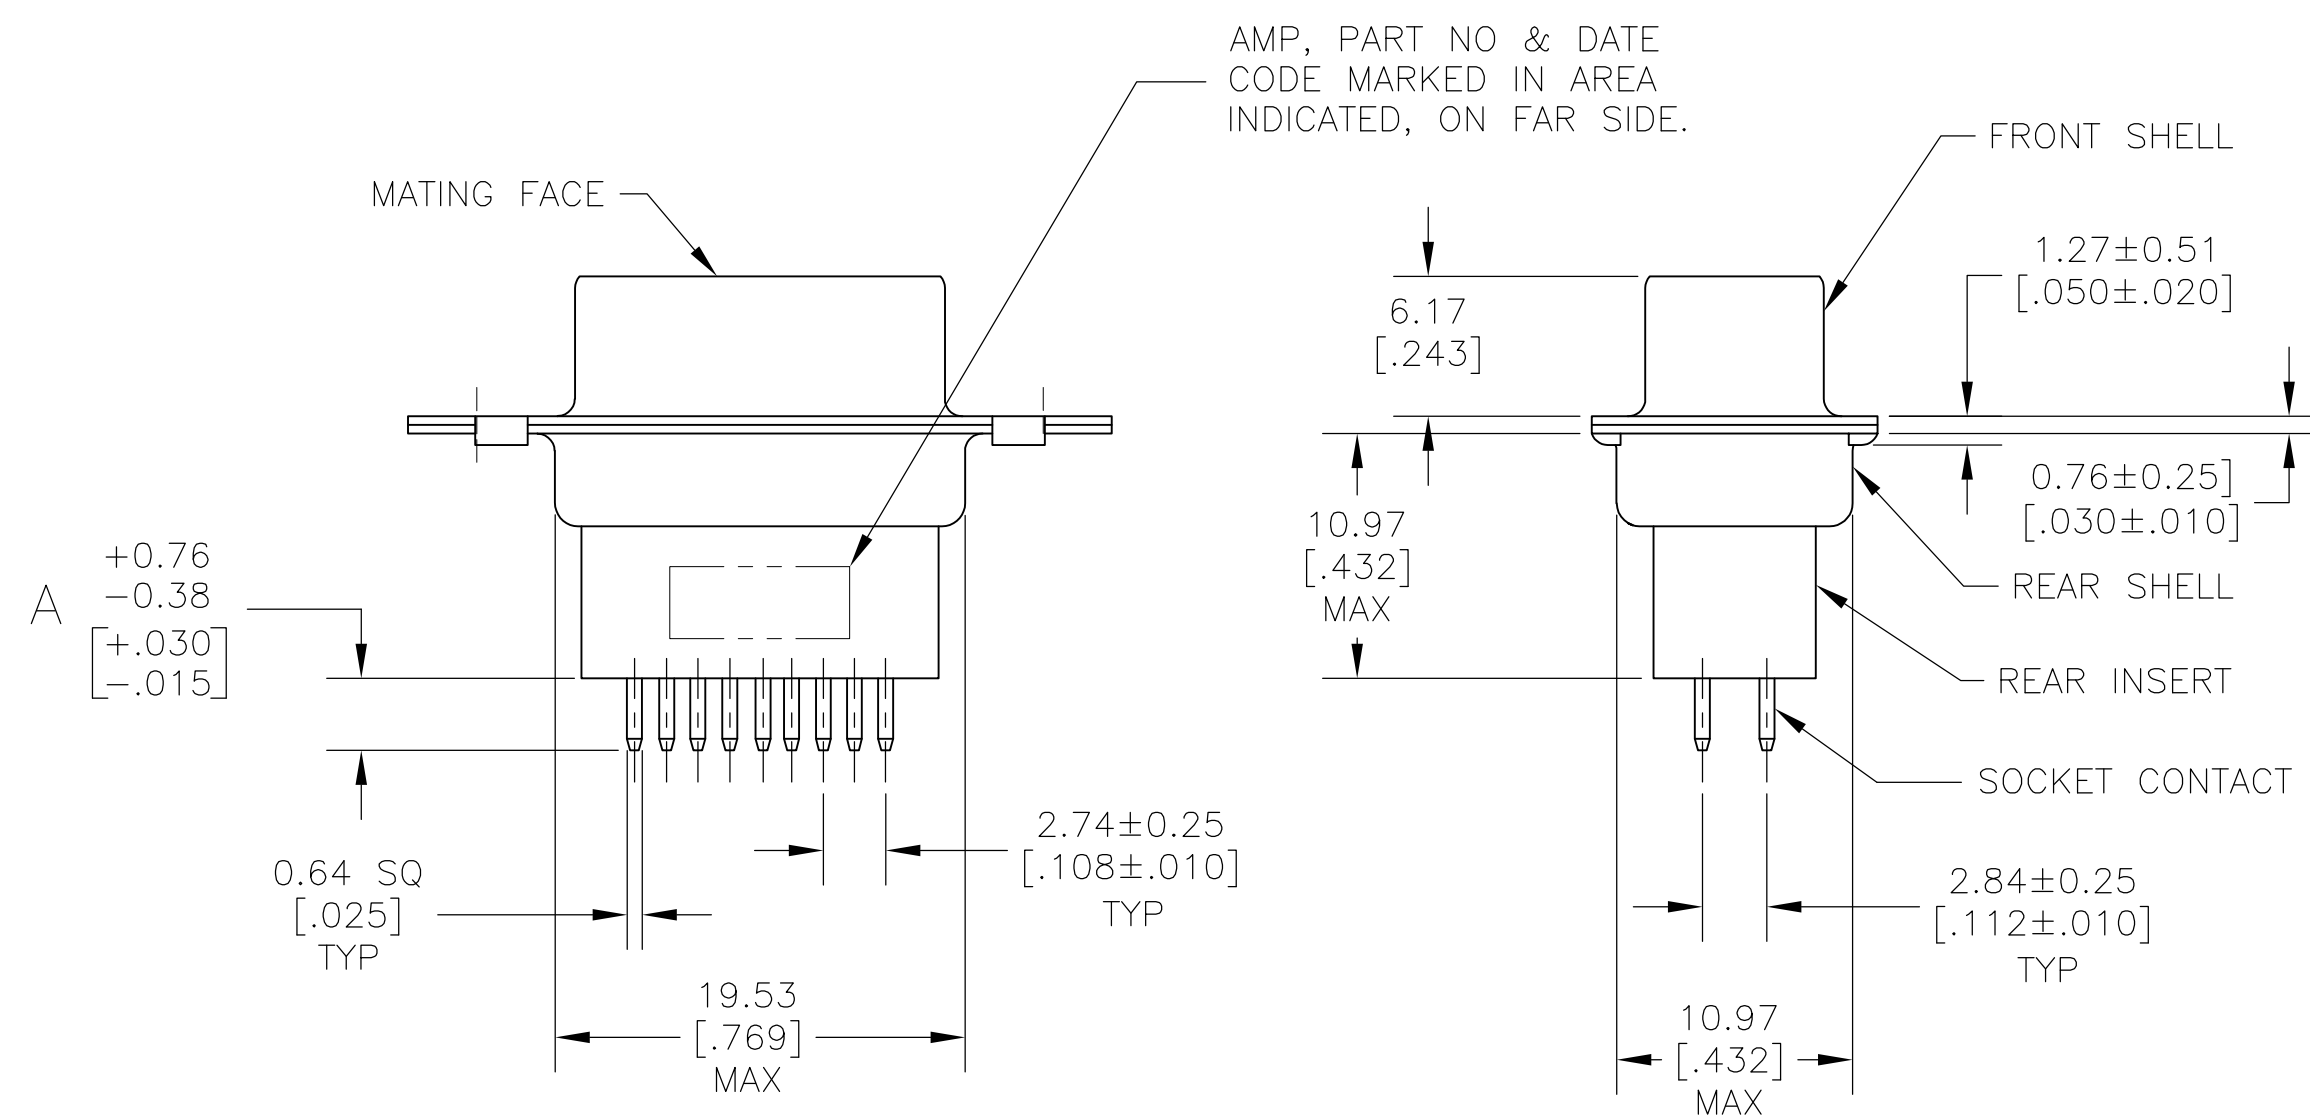
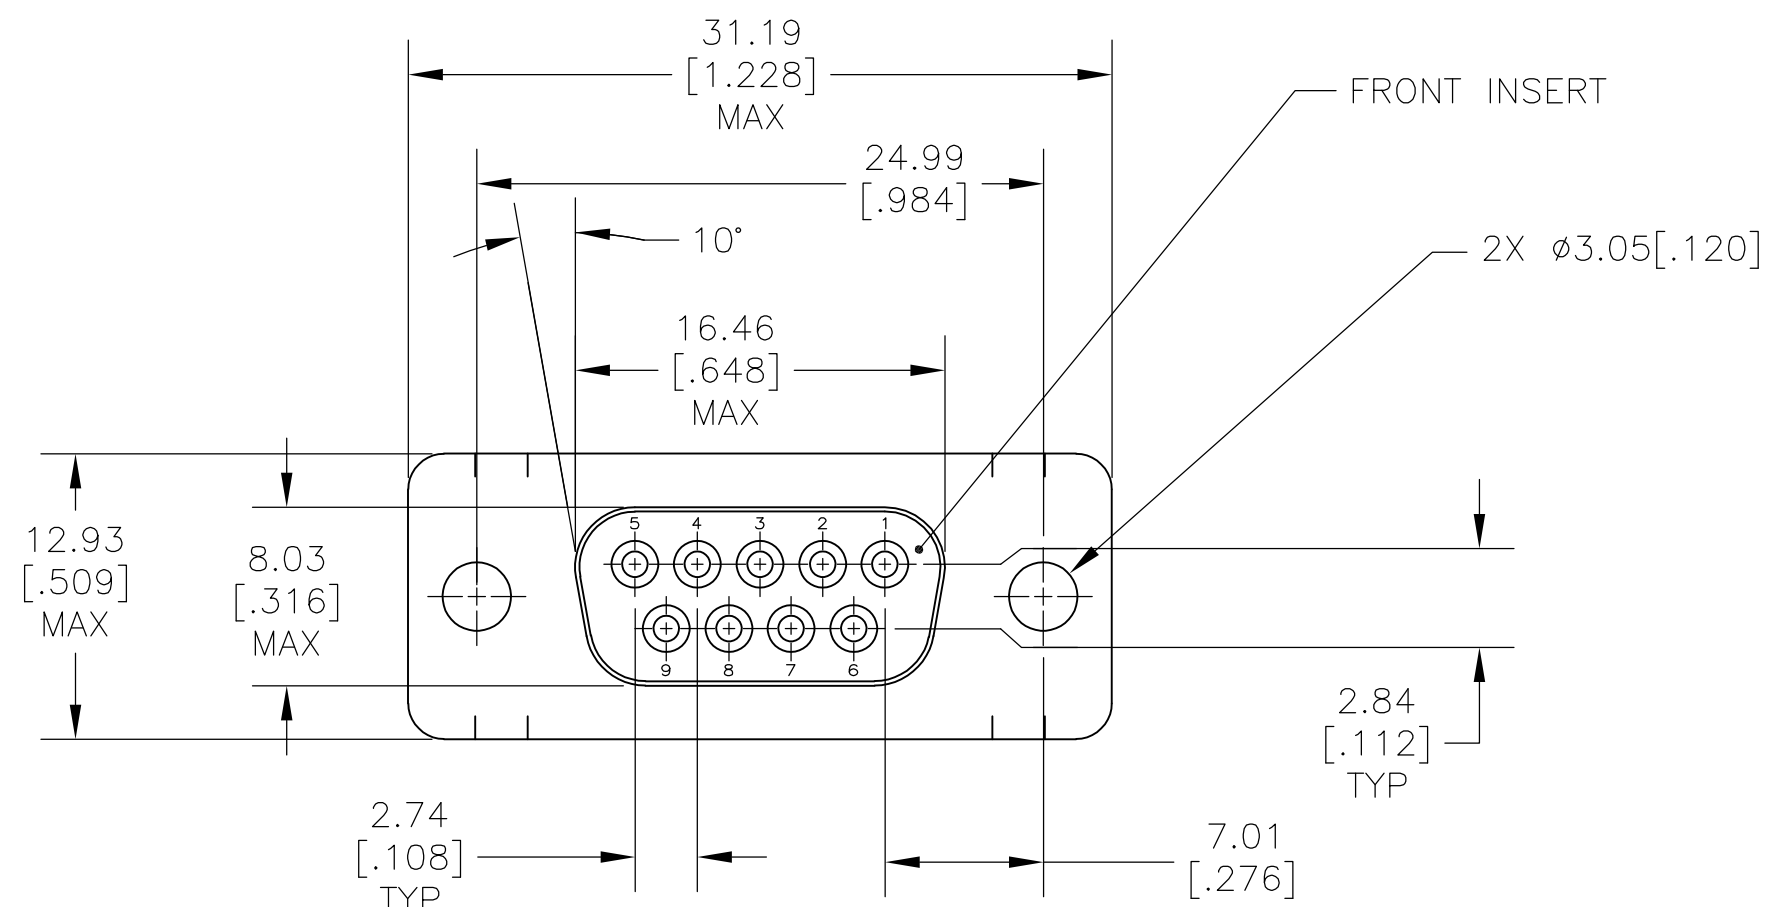


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			Z	REVISED PER ECO-14-011808	09AUG2014	AP	SB



- 1 MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED.
COLOR: BLACK
SHELLS: CARBON STEEL.
CONTACTS: PHOS BRONZE.
- 2 SHELLS: 5.08μm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD FLASH PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END,
2.54μm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER
1.27μm [.000050] MIN NICKEL.
3. NOTE DELETED.
4. NOTE DELETED.
5. NOTE DELETED.
- 6 NOTE DELETED.
- 7 SHELLS: 5.08μm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END,
0.76μm [.000030] MIN GOLD IN MATED AREA,
2.54μm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER
1.27μm [.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM-NICKEL PLATED FOR LENGTH OF
3.81 [.150] MIN FROM MATING END,
0.76μm [.000030] MIN TOTAL IN MATED AREA,
2.54μm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER
1.27μm [.000050] MIN NICKEL.

OBSOLETE	—	—	205734-9
SUPSD BY 205734-7		4.78 [.188]	205734-8
		4.78 [.188]	205734-7
SUPSD BY 205734-5	—	—	205734-6
		16.54 [.651]	205734-5
		10.85 [.427]	205734-4
SUPSD BY 205734-5		10.85 [.427]	205734-3
SUPSD BY 205734-1		3.18 [.125]	205734-2
		3.18 [.125]	205734-1
	CONTACT FINISH	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE	01FEB07		 TE Connectivity		
		CHK E. BRIANT	01FEB07				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD E. BRIANT	01FEB07		
		1 PLC ± -		NAME RECEPTACLE ASSEMBLY, SIZE 1, 9 POSN, VERTICAL, AMPLIMITE HDP -			
		2 PLC ± -					
		3 PLC ± .005					
		4 PLC ± -					
ANGLES		FINISH		PRODUCT SPEC 108-40025			
MATERIAL		FINISH		APPLICATION SPEC 114-40013			
		 		WEIGHT -			
CUSTOMER DRAWING				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A2	00779	C-205734	-
				SCALE	N.TS		SHEET 1 of 1
						REV	7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[205734-5](#)