


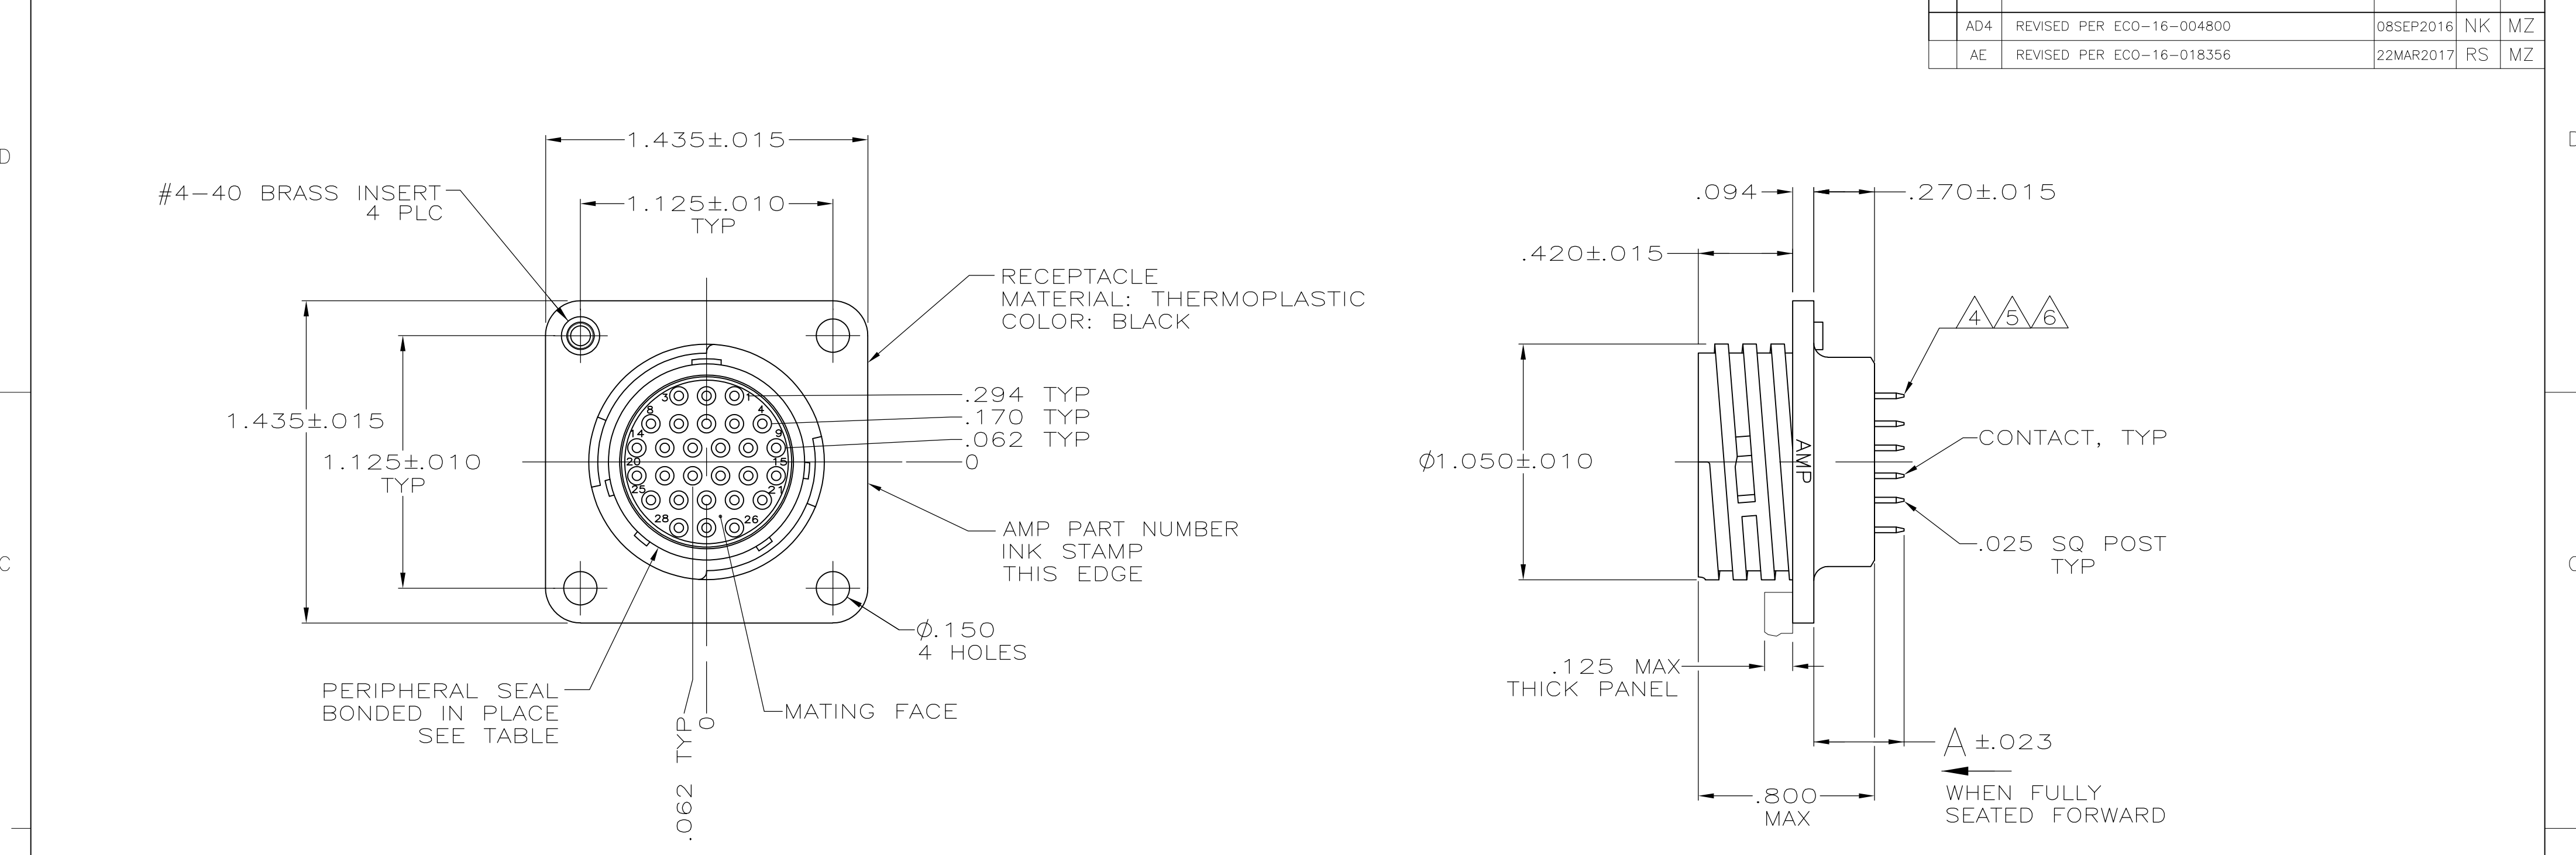

1

CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACE OF CONNECTOR.

2

GOLD FLASH FOR A LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN-LEAD FOR A LENGTH OF DIMENSION 'A' FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.

3

.000030 MIN GOLD FOR A LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN-LEAD FOR A LENGTH OF DIMENSION 'A' FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.

4

CONTACTS TO BE SELECTIVELY LOADED INTO POSITIONS 1, 3, 4, 8, 14, 15, 21, 25, 26, 27 AND 28; FOR -1 ONLY.

5

CONNECTOR TO BE FULLY LOADED FOR -2, -3, -6, AND -8.

6

CONTACTS TO BE SELECTIVELY LOADED INTO POSITIONS 1 THRU 27; FOR -9 ONLY.

7

.000030 MIN GOLD FOR A LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN FOR A LENGTH OF DIMENSION 'A' FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.

8

GOLD FLASH FOR A LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN-LEAD FOR A LENGTH OF DIMENSION 'A' FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.

9

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	NO	YES	8	.851	2-207216-1
8	NO	YES	8	.402	2-207216-0
OBSOLETE	NO	YES	8	.402	1-207216-9
OBSOLETE	YES	NO	8	.851	1-207216-8
	NO	NO	7	.629	1-207216-7
	NO	NO	8	.402	1-207216-6
8	NO	NO	7	.629	1-207216-4
OBSOLETE	NO	YES	3	.629	1-207216-3
OBSOLETE	NO	YES	3	.851	1-207216-2
8	NO	YES	2	.402	1-207216-1
OBSOLETE	NO	YES	2	.402	1-207216-0
OBSOLETE	YES	NO	2	.851	207216-9
	NO	NO	3	.629	207216-8
OBSOLETE	NO	YES	3	.629	207216-6
OBSOLETE	NO	YES	2	.402	207216-3
	NO	NO	2	.402	207216-2
OBSOLETE	NO	NO	2	.402	207216-1
	SEAL	THREADED INSERT	CONTACT FINISH	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. GALLUCCI BG 5-22-91	TE Connectivity		
DIMENSIONS: INCHES		CHK W.G. LENKER 4-14-92			
		APVD K. BEAVER 4-14-92	NAME RECEPTACLE ASSEMBLY, POSTED, RVS SEX, 17-28, SERIES 2, CPC		
		PRODUCT SPEC 108-10024			
MATERIAL SEE CALLOUT		APPLICATION SPEC	SIZE A2	CAGE CODE 00779	DRAWING NO C-207216
SEE TABLE		WEIGHT -	SCALE 2:1		SHEET 1 of 1
		CUSTOMER DRAWING	REV AE		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-207216-2](#)