


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Jan. 1. 2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

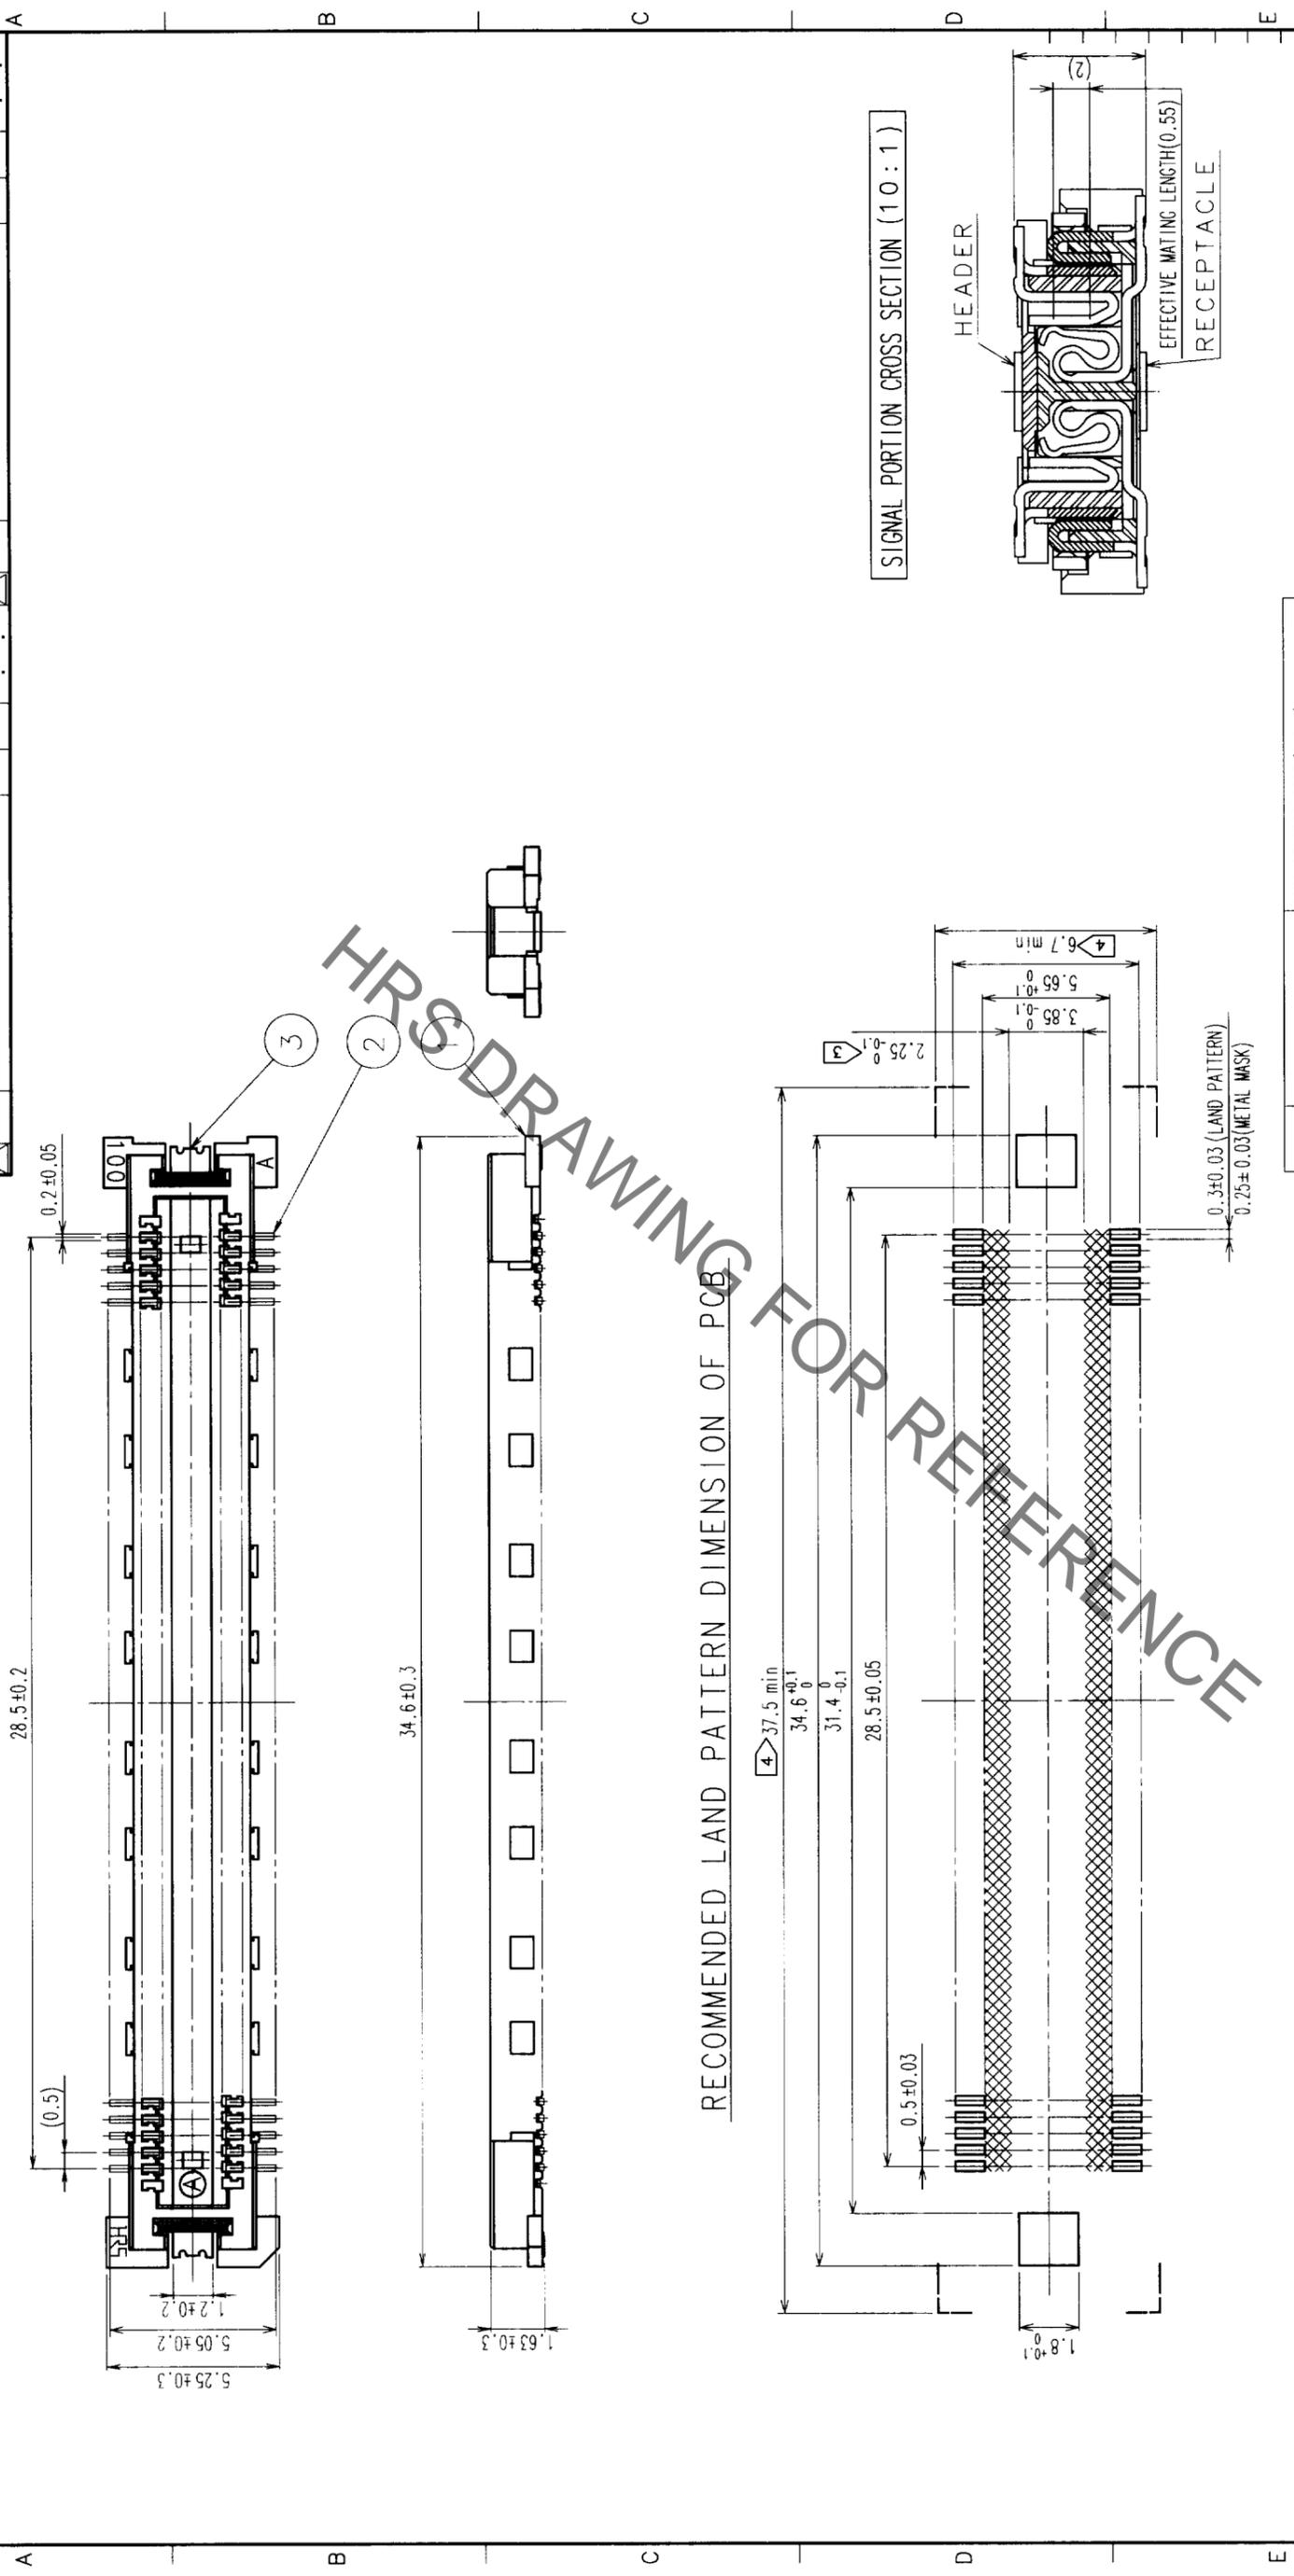

RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
  - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - 4 DO NOT MOUNT OTHER DEVICES ONTO [ ] AREA ,OR MATING PAIR CANNOT BE MATED.
  - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE


2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL			
1	LCP	LEAD: GOLD FLASH OVER NICKEL			
3	PHOSPHOR BRONZE	BEIGE UL94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL		DRAWN	DESIGNED	CHECKED
DRAWING NO.	EDC3-152106-02		PART NO.	FX11LB-116P-SV (22)	
SCALE	5 : 1		CODE NO.	CL573-0054-0-22	
UNITS	mm				

TO	
PCK	

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

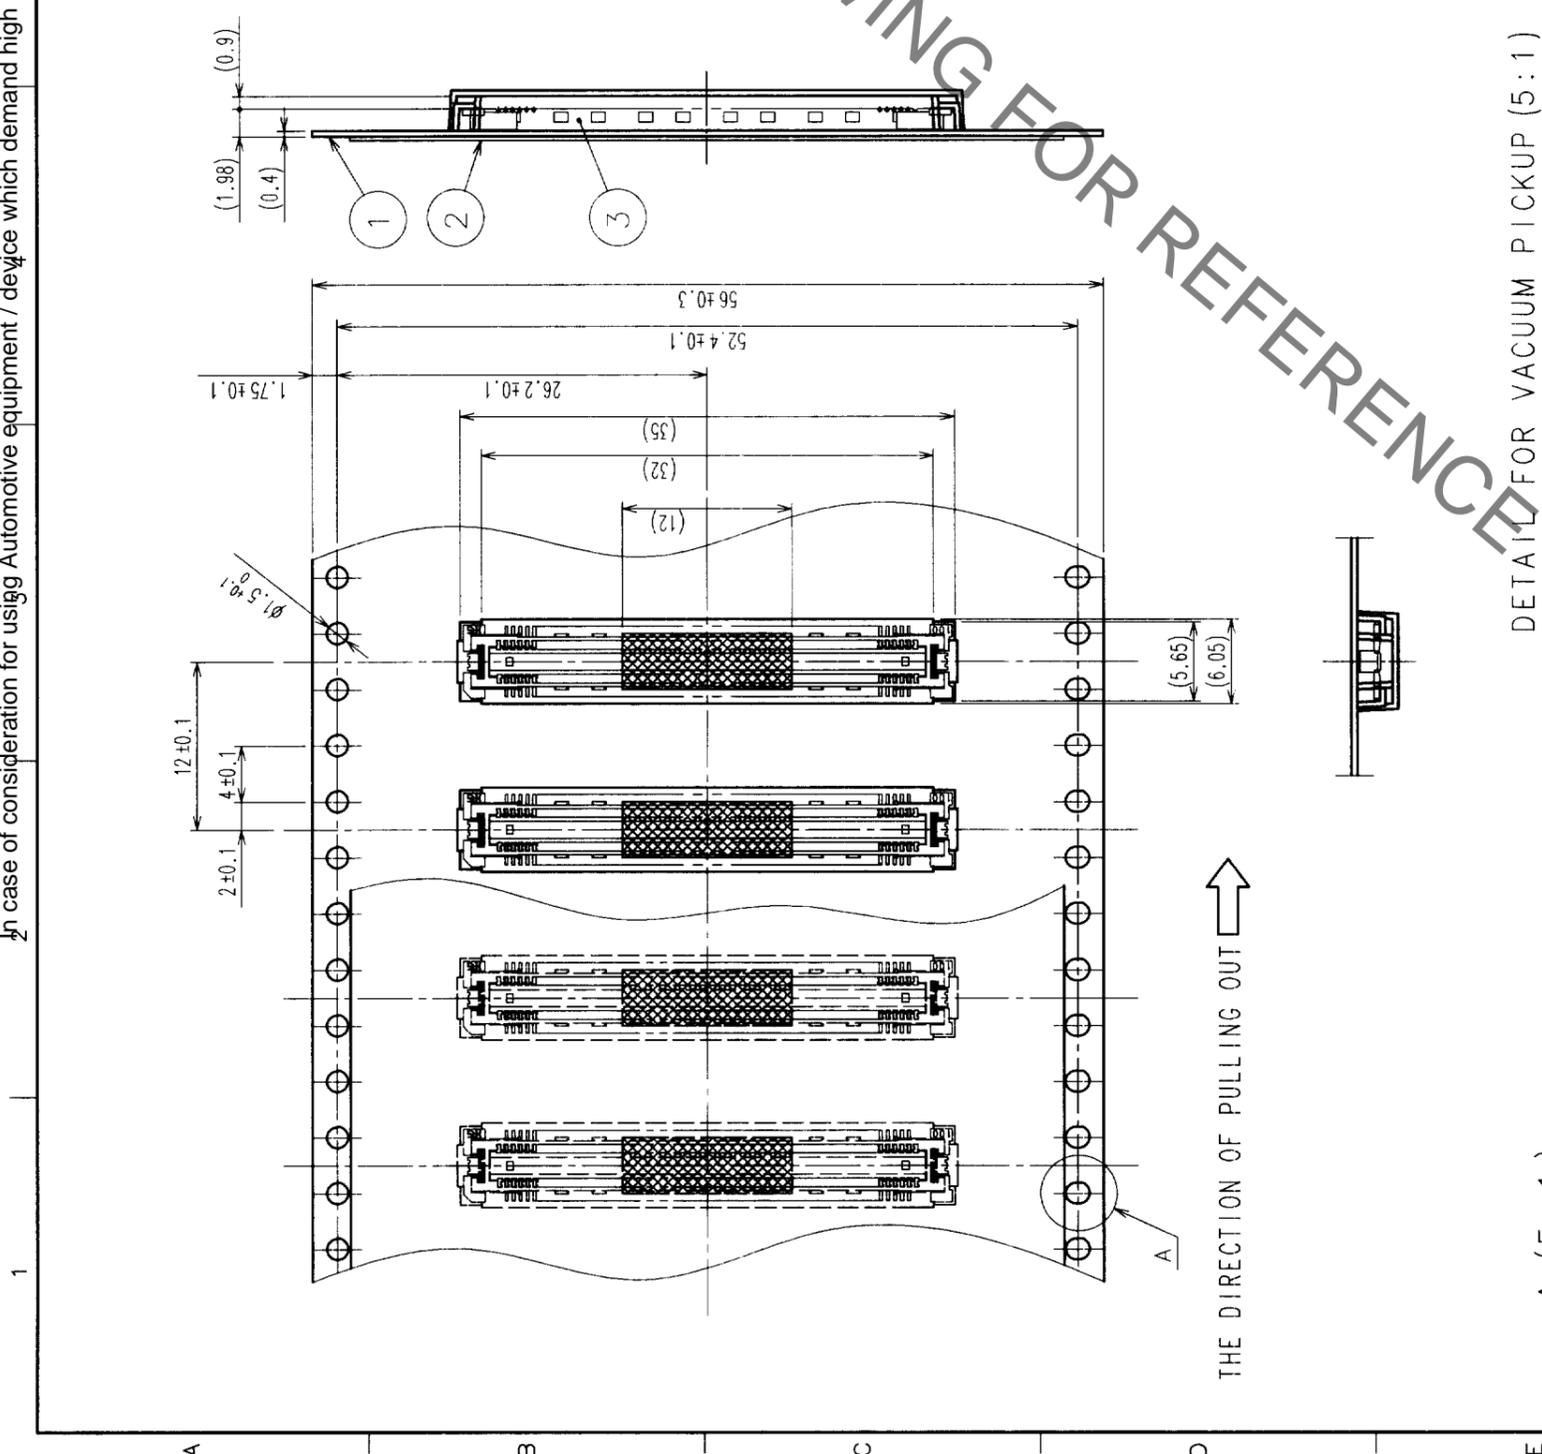



REELED DIMENSION (Free)

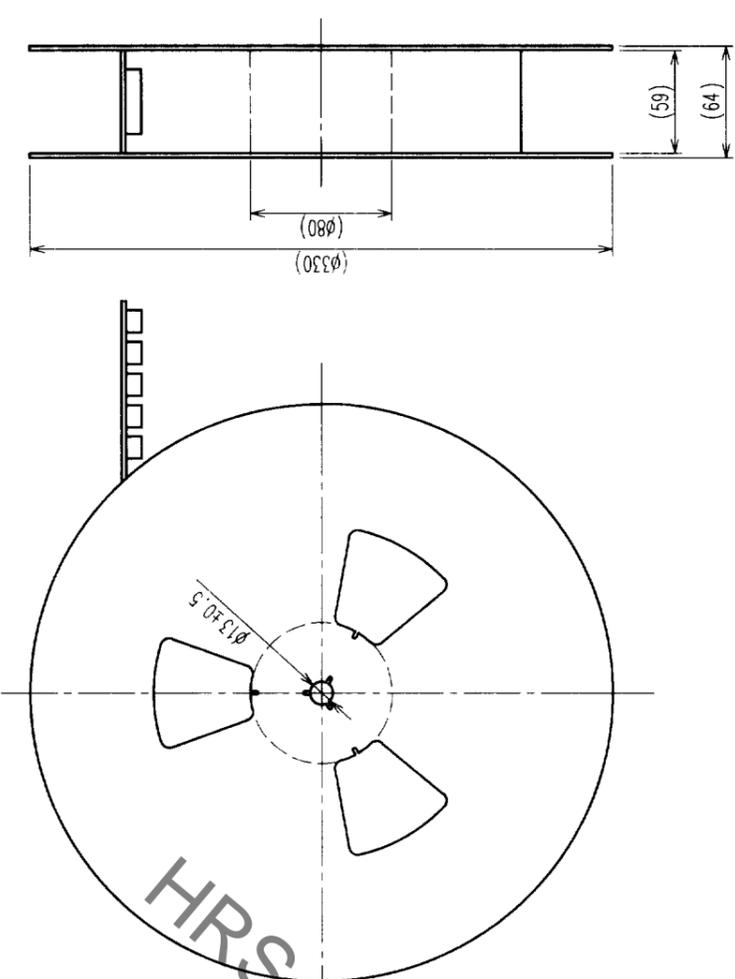

- NOTES
- 1 REEL: 1000 CONNECTORS.
  - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
  - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.

DETAIL FOR VACUUM PICKUP (5:1)

A (5:1)



2	PET	TOP COVER TAPE	4	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
1	PS	EMBOSSED CARRIER TAPE	3	(CONNECTOR)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED
CL		Mitsuharu M. Sakabe		Mitsuharu M. Sakabe	J. Yoshimura
DRAWING FOR PACKING		99.10.27		99.10.28	99.10.28
DRAWING NO.		PART NO.		RELEASED	
EDC3-152106-02		FX11LB-116P-SV(22)			
SCALE		CODE NO.			
2 : 1		CL573-0054-0-22			
UNITS		HIROSE ELECTRIC CO., LTD			
mm					

TO	
PCK	