


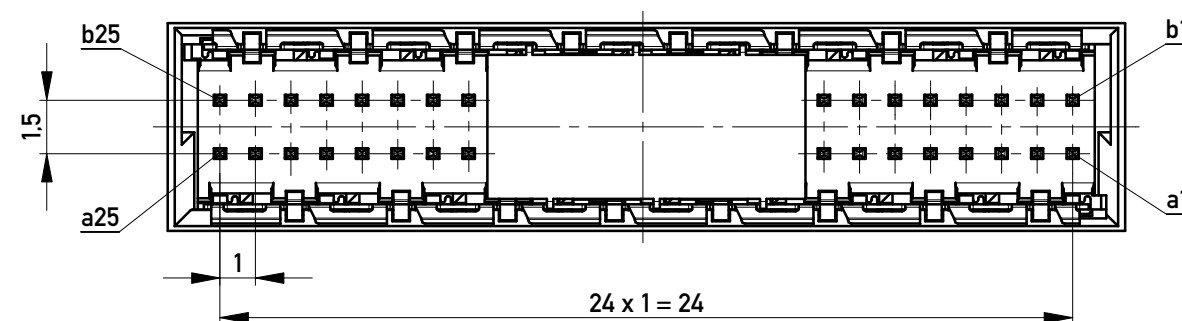
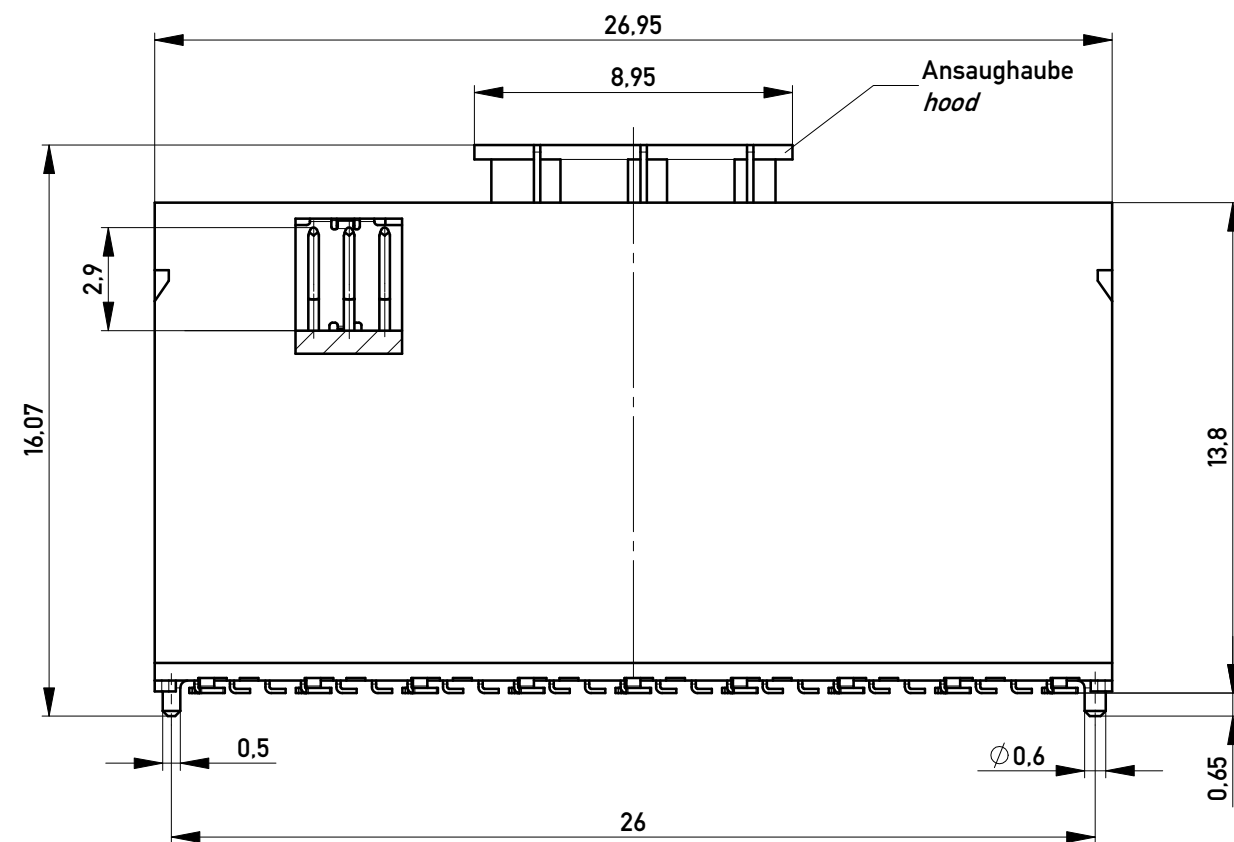


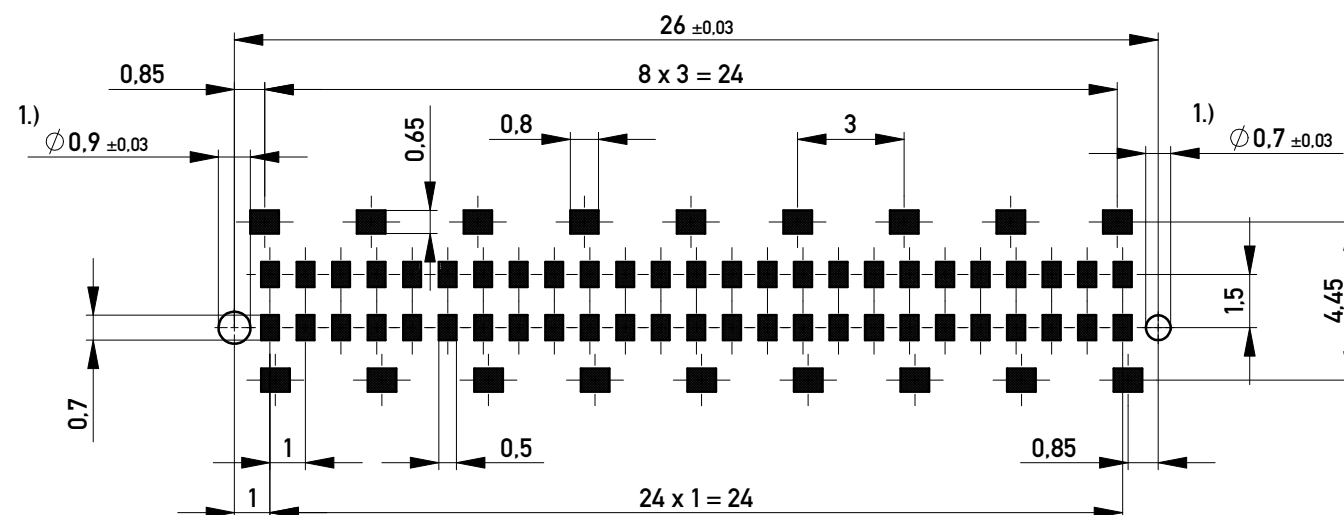


Leiterplatten-Layout Vorschlag / PCB-layout proposal

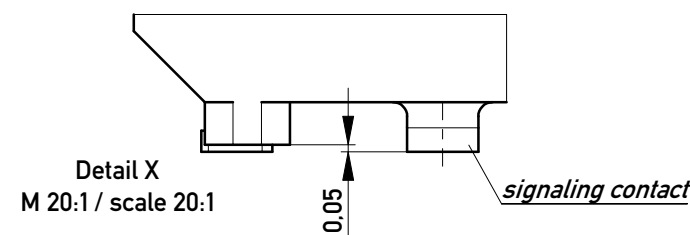


1.) Durchmesser des Bohrers / Drill tool

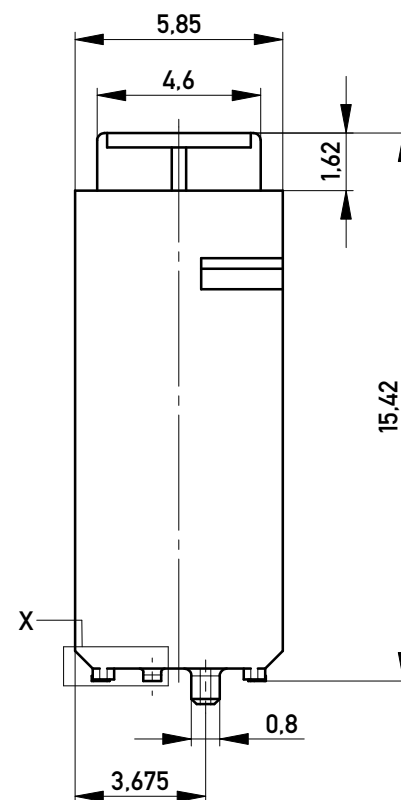

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 220 Stück
packaging unit: 220 pcs



Abspulrichtung - Reel off Direction

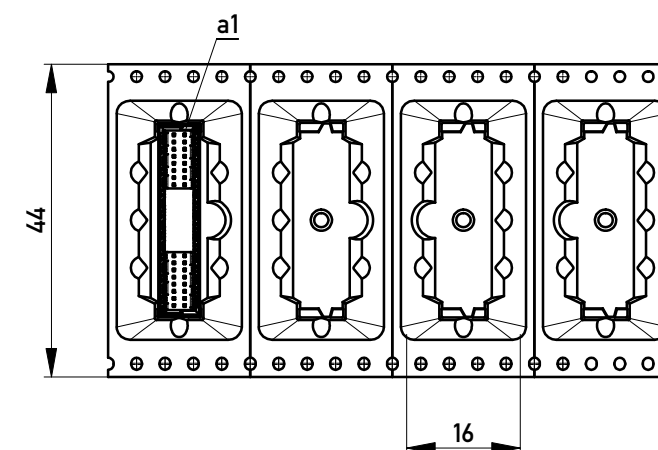


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16061 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation			
								Messerleiste10mm SMD, 50 polig <i>Male 10mm SMD, 50 contacts</i>			
				ERNI				www.ERNI.com			
k				21.07.2017				Class		MSPEED	
Index				Date						I A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[224561](#)