


REVISIONS		DATE	APPROVED
ZONE	LTR	DESCRIPTION	
—	A	CHG'D PER DCO # T-02581	
			W.J. 4-25-81 <i>Plan</i>

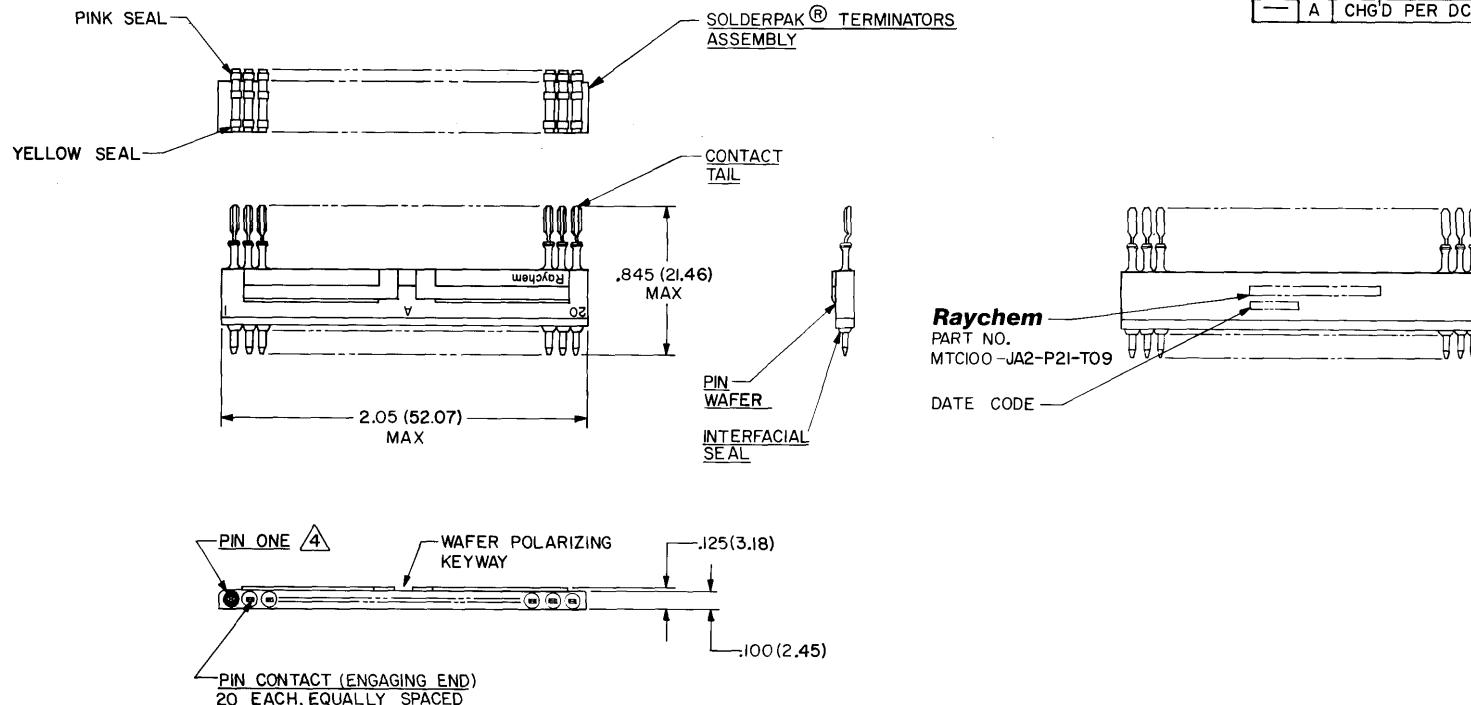

5 WEIGHT (MAX) 8 LBS. GRAMS
.0090 4.08

PIN ONE: PIN NUMBER ONE MARKED IN CONTRASTING COLOR ON INTERFACIAL SEAL.

3. WAFER: WAFER MEETS THE REQUIREMENTS OF RAYCHEM SPECIFICATION D-6011.

2. FINISH: 2-A PIN WAFER: FINISH TO BE AS MOLDED.
2-B PIN CONTACT: GOLD PLATE PER MIL-G-45204, CLASS I.
2-C CONTACT TAIL: COATED WITH SOLDER PER QQ-S-571.

1. MATERIAL: 1-A PIN WAFER: HIGH GRADE POLYARYLENE THERMO-PLASTIC.
1-B PIN CONTACT: COPPER ALLOY PER QQ-B-613 OR QQ-C-502.
1-C INTERFACIAL SEAL: SILICONE ELASTOMER PER MIL-R-25988.
1-D SOLDERPAK® TERMINATORS ASSY: REFER TO RAYCHEM DWG. CTA-0027 FOR DATA.

NOTES

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
BRACKETED DIMENSIONS () ARE
METRIC AND TOLERANCES ARE:
XXX \pm .005 (0.13 M.M.)
.XX \pm .02 (0.51 M.M.)
△ \pm —

DRAWN	W V J	I-15-61
CHECKED		
APPROVED		
APPROVED		
APPROVED		

Raychem

TITLE KIT, 2" PIN WAFER "A" WITH
SOLDERPAK® TERMINATORS, FOR
ROUND WIRE (20-26 AWG),
150°C TEMPERATURE RATING
MTC 100 SERIES

SIZE	CODE IDENT	DWG. NO.
C	NO 06090	MTC100-JA2-P2I-T09
		WEIGHT 5
		SHEET 1 OF 1

SPECIFICATION CONTROL DRAWING

© Raychem Corporation 1981

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MTC100-JA2-P21-T09](#)