

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0465573345](#)  
**Status:** **Active**  
**Overview:** SEARAY and SEARAY Slim Mezzanine Family  
**Description:** SEARAY Slim Receptacle, 120 Circuits, 6.50mm Unmated Height, 4 Rows, with Pegs, Solder Charge Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-45970-990-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-45971-002-001 (PDF)</a>
<a href="#">Product Specification PS-45970-001-001 (PDF)</a>	<a href="#">Packaging Specification RPK-45971-009 (PDF)</a>
<a href="#">Application Specification AS-45970-001 (PDF)</a>	<a href="#">Test Summary TS-45970-002-001 (PDF)</a>
<a href="#">Application Specification AS-45970-002-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**


CSA	LR19980
UL	E29179

**General**

Product Family	PCB Receptacles
Series	<a href="#">46557</a>
Application	Board-to-Board, Signal
Electrical Model	Yes
Overview	<a href="#">SEARAY and SEARAY Slim Mezzanine Family</a>
Product Name	SEARAY
UPC	883906530495

**Physical**

Circuits (Loaded)	120
Circuits (maximum)	120
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	No
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.673/g
Number of Rows	4
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.18mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +125°C

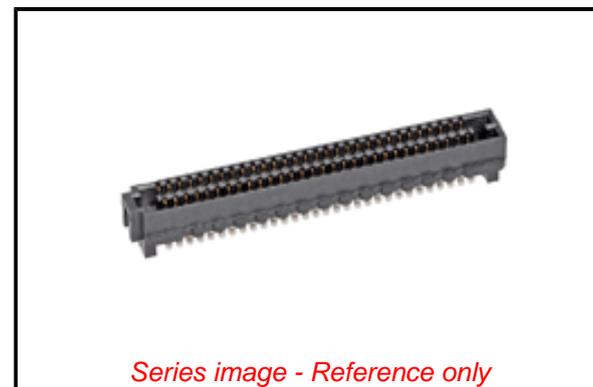

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[46557](#) Series

**Mates With**

[46556](#) SEARAY Slim Plug

Termination Interface: Style Surface Mount  
Unmated Height 6.50mm

**Electrical**

Current - Maximum per Contact 2.7A  
Grounding to PCB No  
Voltage - Maximum 240V AC

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 020  
Lead-freeProcess Capability REFLOW  
Max. Cycles at Max. Process Temperature 003  
Process Temperature max. C 260

**Material Info**

**Reference - Drawing Numbers**

Application Specification AS-45970-001, AS-45970-002-001, AS-45970-990-001  
Electrical Model Document EE-45970-010  
Packaging Specification PK-45971-002-001, RPK-45971-009  
Product Specification PS-45970-001-001  
S-Parameter Model SP-45970-010  
Sales Drawing SD-46557-001-001  
Symbol/Footprint Data SYM-46557-3345  
Test Summary TS-45970-002-001

This document was generated on 10/02/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[46557-3345](#)