

PRODUCT NUMBER
10007607-YXX-XXLF

WHEN REQUIRED, ADD SUFFIX LETTER "LF"
INDICATES THE PRODUCT IS RoHS COMPATIBLE
SEE NOTE 5

TOTAL NB OF POSITIONS 02 TO 36

STYLE	DIM "A"	DIM "B"
01	5.8	2.5
02	8.5	1.6
03	11.0	2.5

PLATING




8 = 0.38µm GOLD/GXT ON CONTACT AREA
3.81µm TIN-LEAD ON TAIL

4 = 2.0µm TIN MIN FULL PLATED

- WHEN "LF" IS REQUIRED, 2µm MATTE
TIN OVER 1.27µm MIN NICKEL IS
PROVIDED INSTEAD OF TIN-LEAD

NOTES:

- HOUSING MAT'L : HIGH TEMPERATURE
THERMOPLASTIC. UL94V-0 COLOR: BLACK
- PIN MATERIAL : PHOSPHOR BRONZE
- 12N MIN RETENTION IN EITHER DIRECTION
- PRODUCT PACKAGED IN POLY BAGS.
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - LABELLING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT : SEE GS-22-008

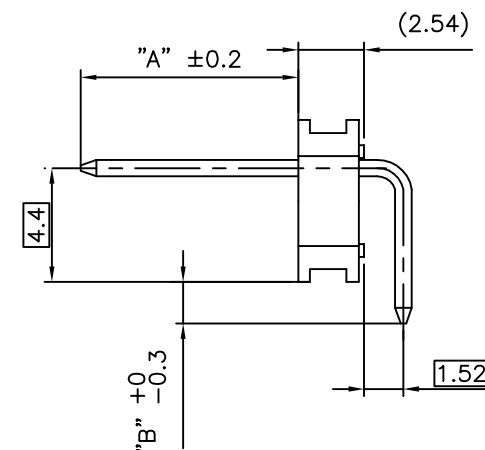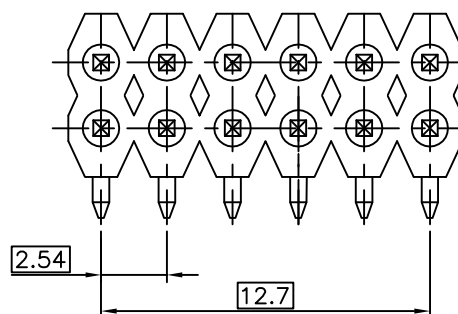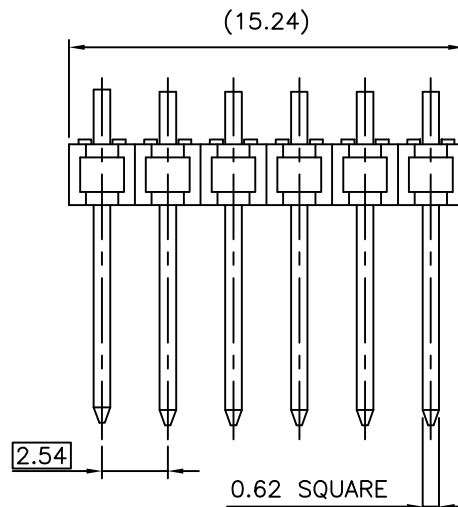

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BSTIK			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title HDR SR RA BODY DR			
A	F06-0109	LMU	06.01.17	angles	linear			scale 5:1					
B	F06-0207	LMU	06.07.27										
C	F07-0182	LMU	07.05.09										
D	F08-0148	RTR	08.03.31	dr	L.MULIN	02.09.23				dwg no sheet 1 of 1 10007607 A.			
E	F10-0059	LMU	10.05.31	engr	J.COMPAGNON	02.09.23							
				chr									
				appd						type CUSTOMER Drawing			
sheet index		revision sheet											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10007607-801-06LF](#) [10007607-801-36LF](#) [10007607-802-06LF](#) [10007607-802-36LF](#) [10007607-402-04LF](#)
[10007607-401-04LF](#)