

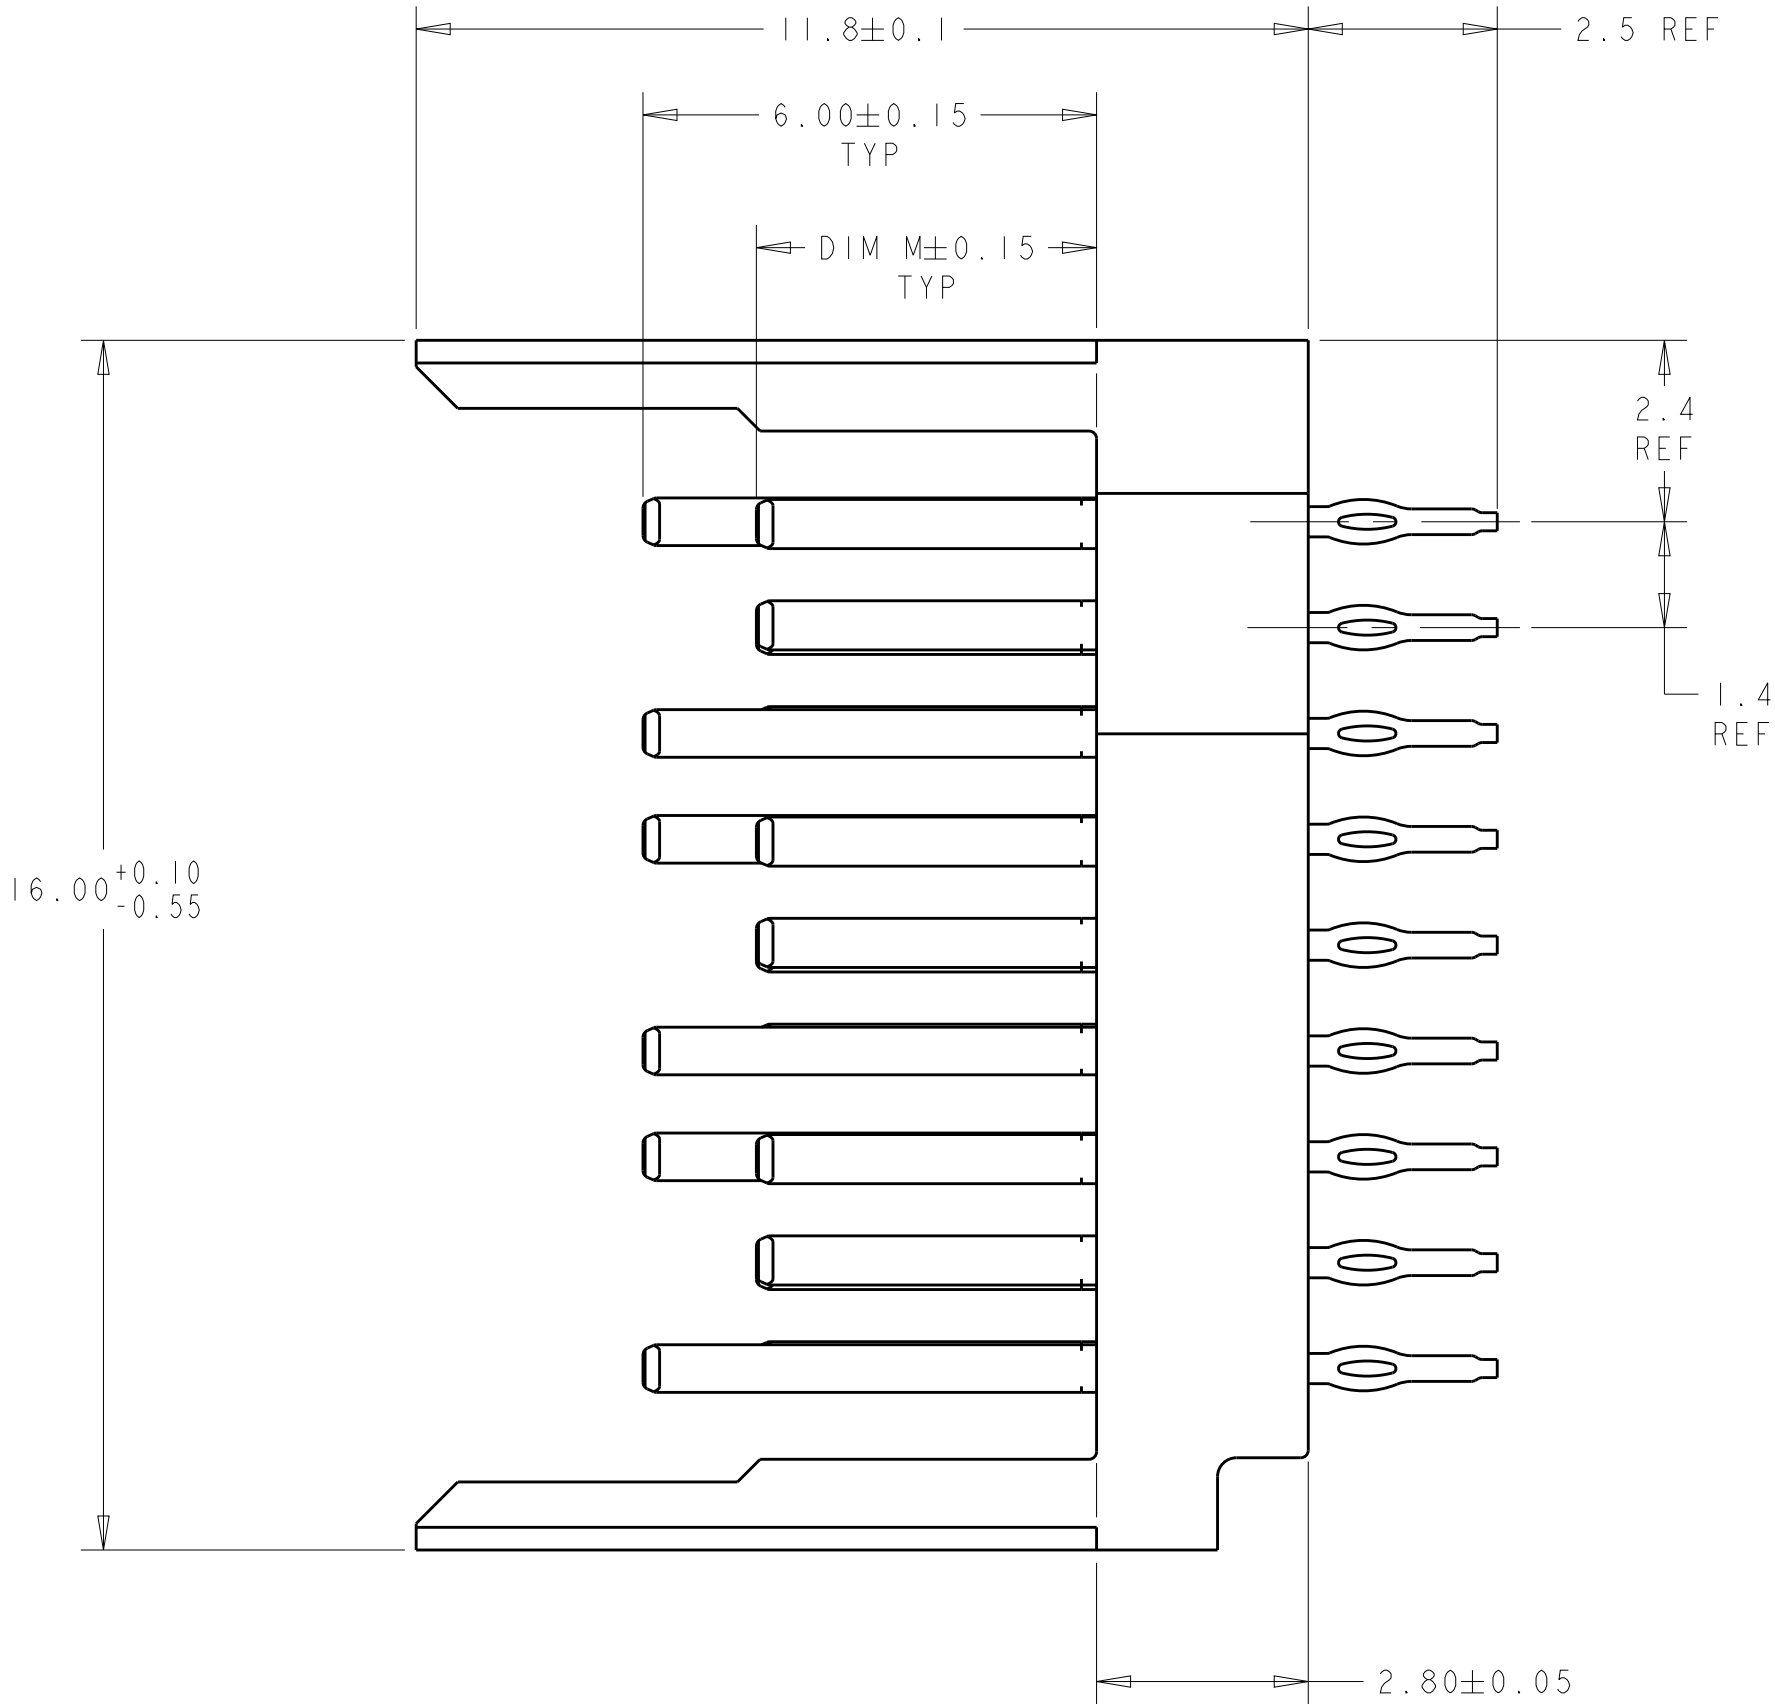



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		E	REVISED PER ECO-13-002771	19MAR2013	KH	RP

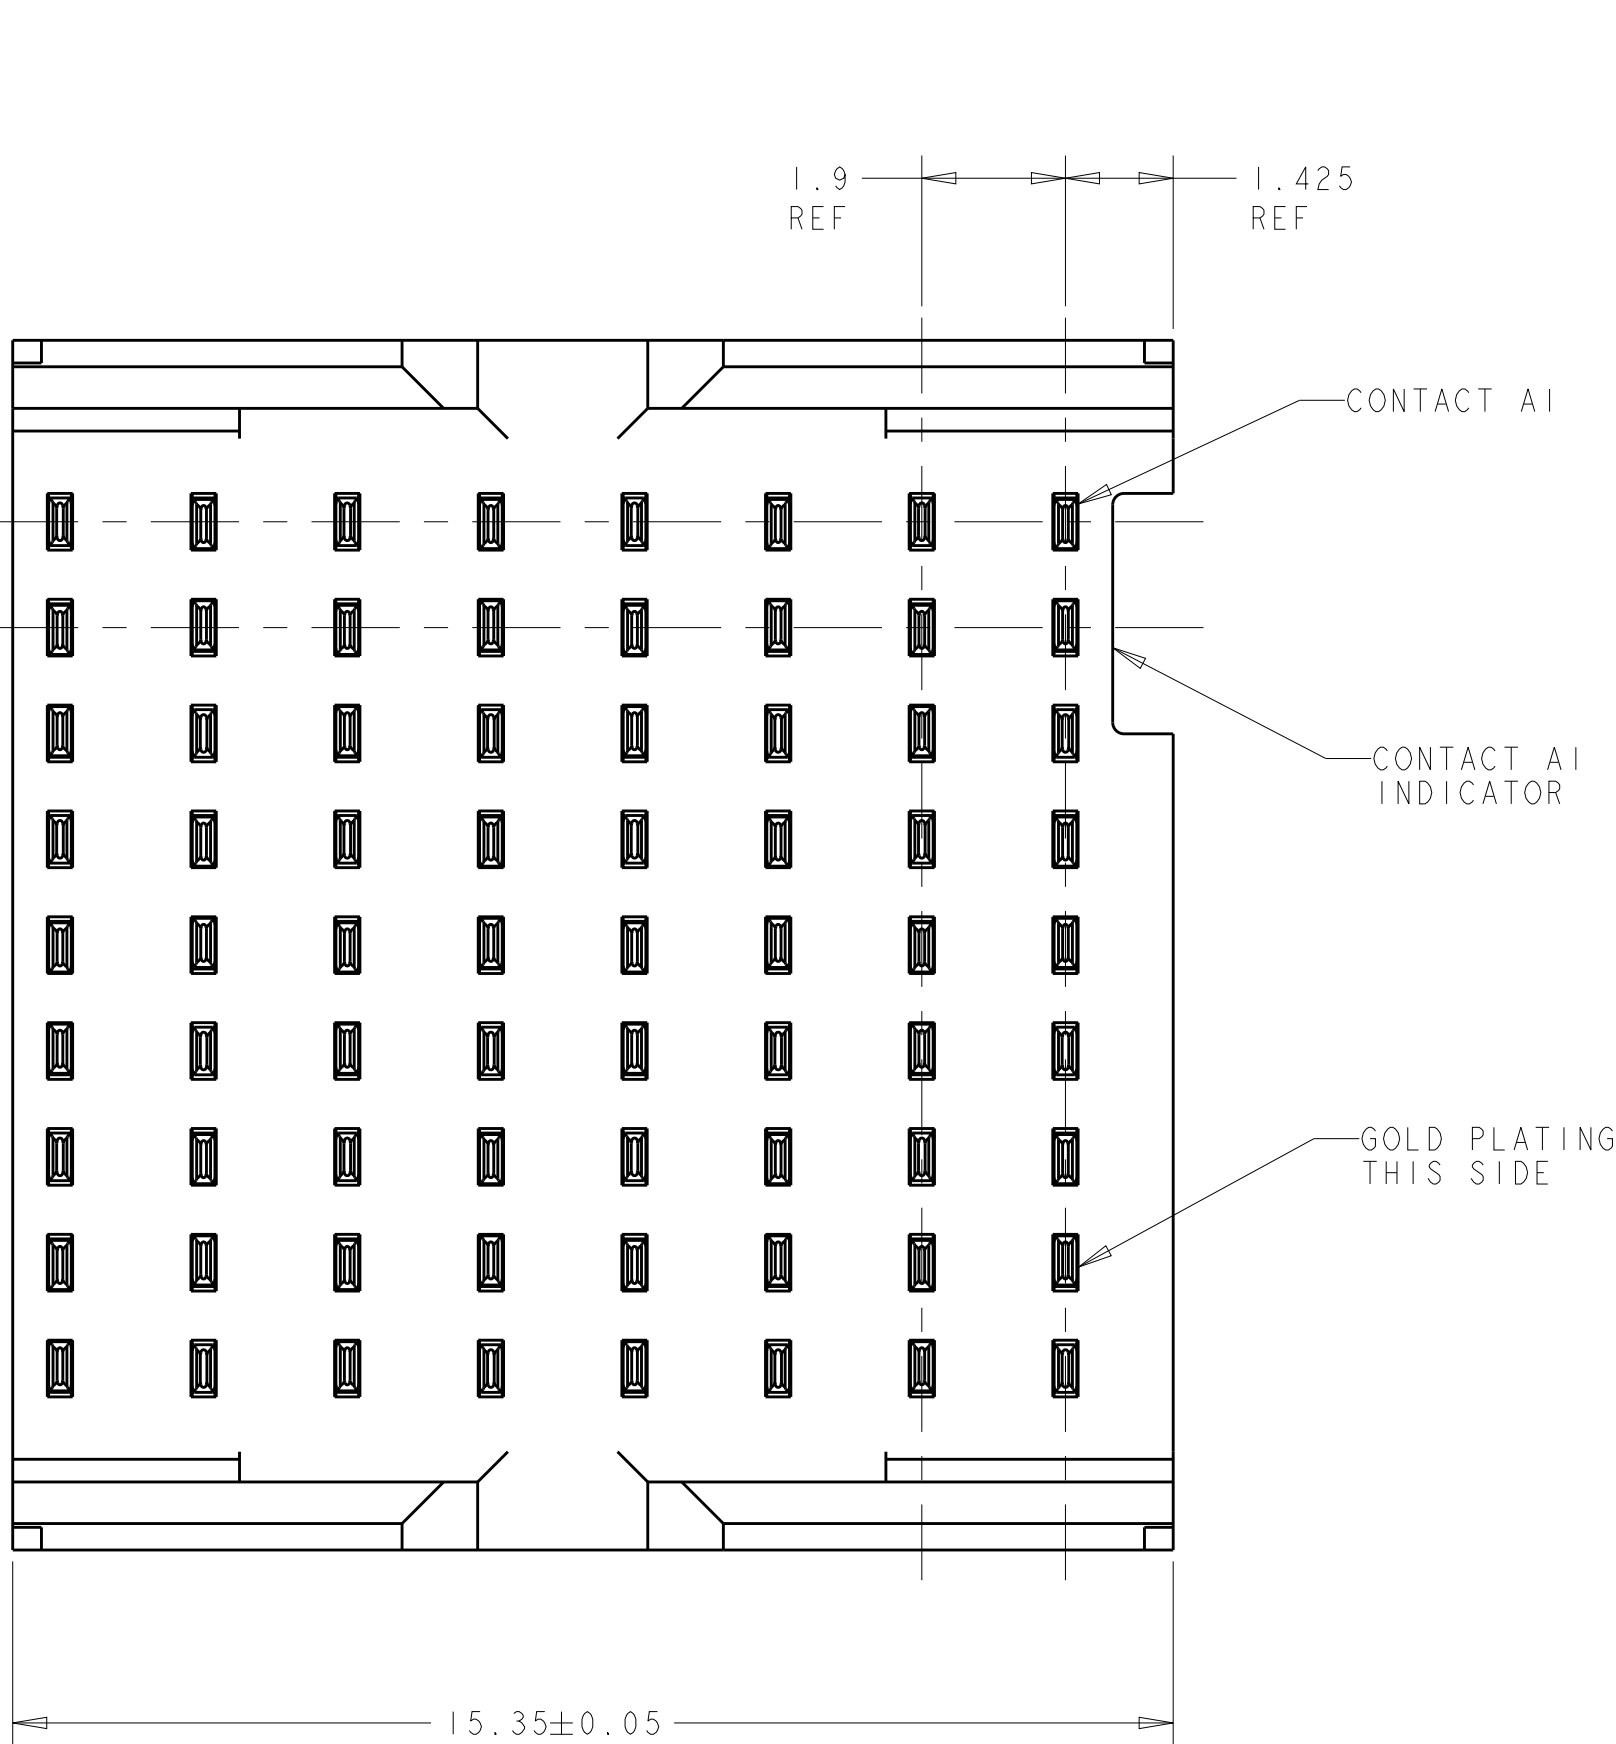

- 1 MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

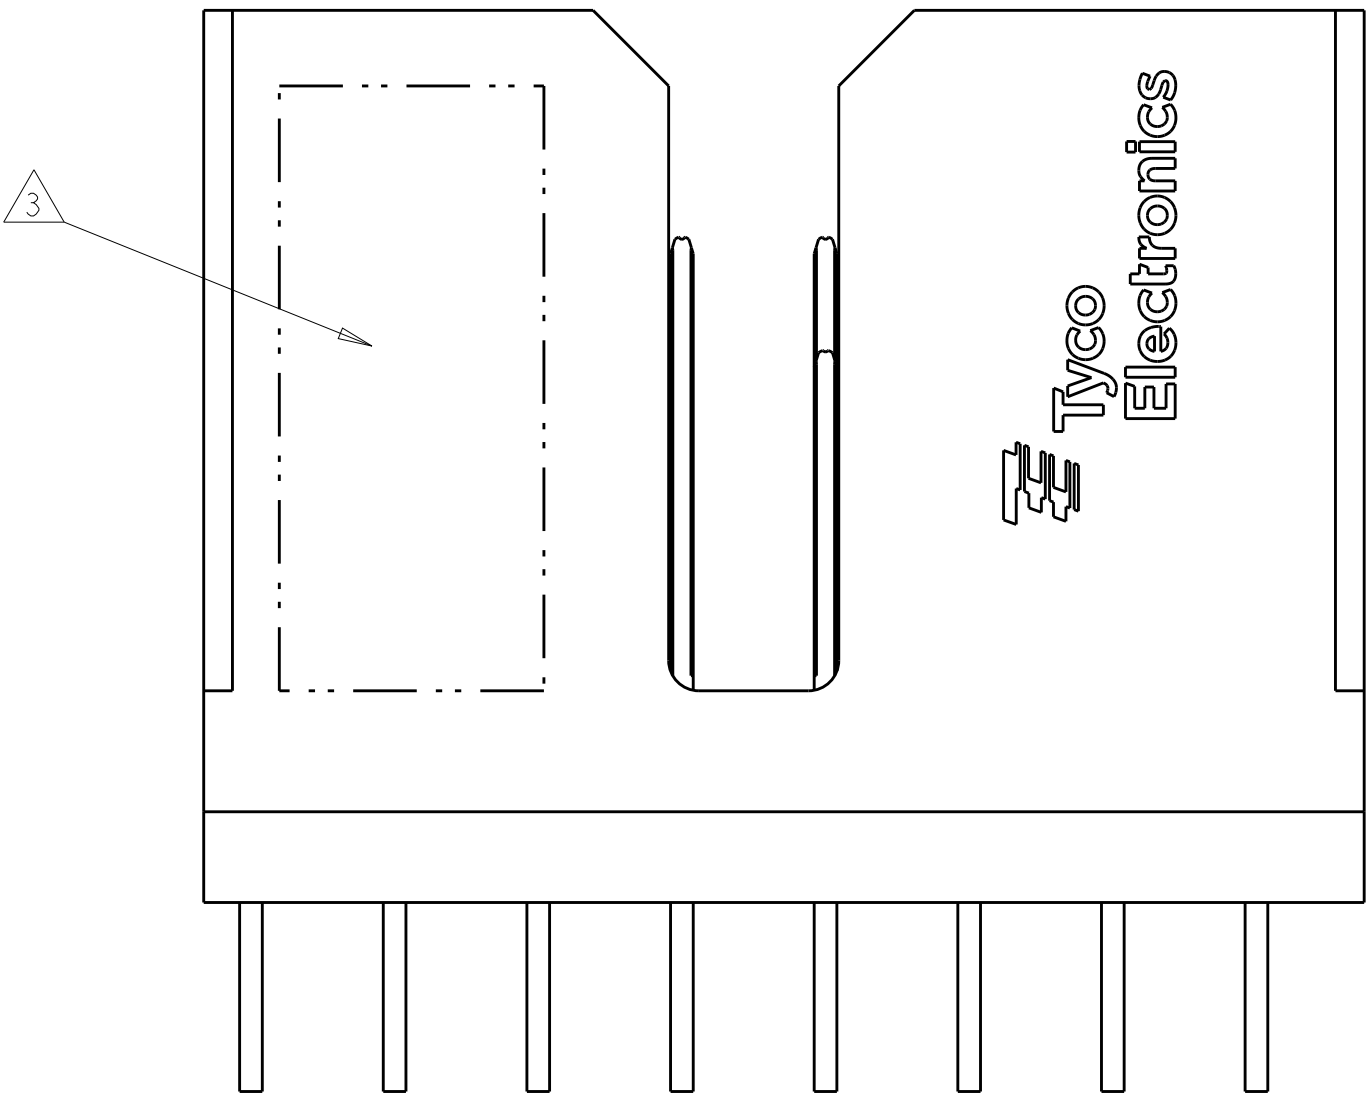

CONTACT LAYOUT									
A = 4.50mm (DIM M)									
B = 3.70mm (DIM M)									
G = GROUND 6.00mm									
ROWS	COLUMNS								
		8	7	6	5	4	3	2	1
	A	G	A	G	A	G	A	G	A
	B	A	A	A	A	A	A	A	A
	C	A	G	A	G	A	G	A	G
	D	G	A	G	A	G	A	G	A
	E	A	A	A	A	A	A	A	A
	F	A	G	A	G	A	G	A	G
	G	G	A	G	A	G	A	G	A
	H	B	A	A	A	A	A	A	A
	I	B	G	A	G	A	G	A	G

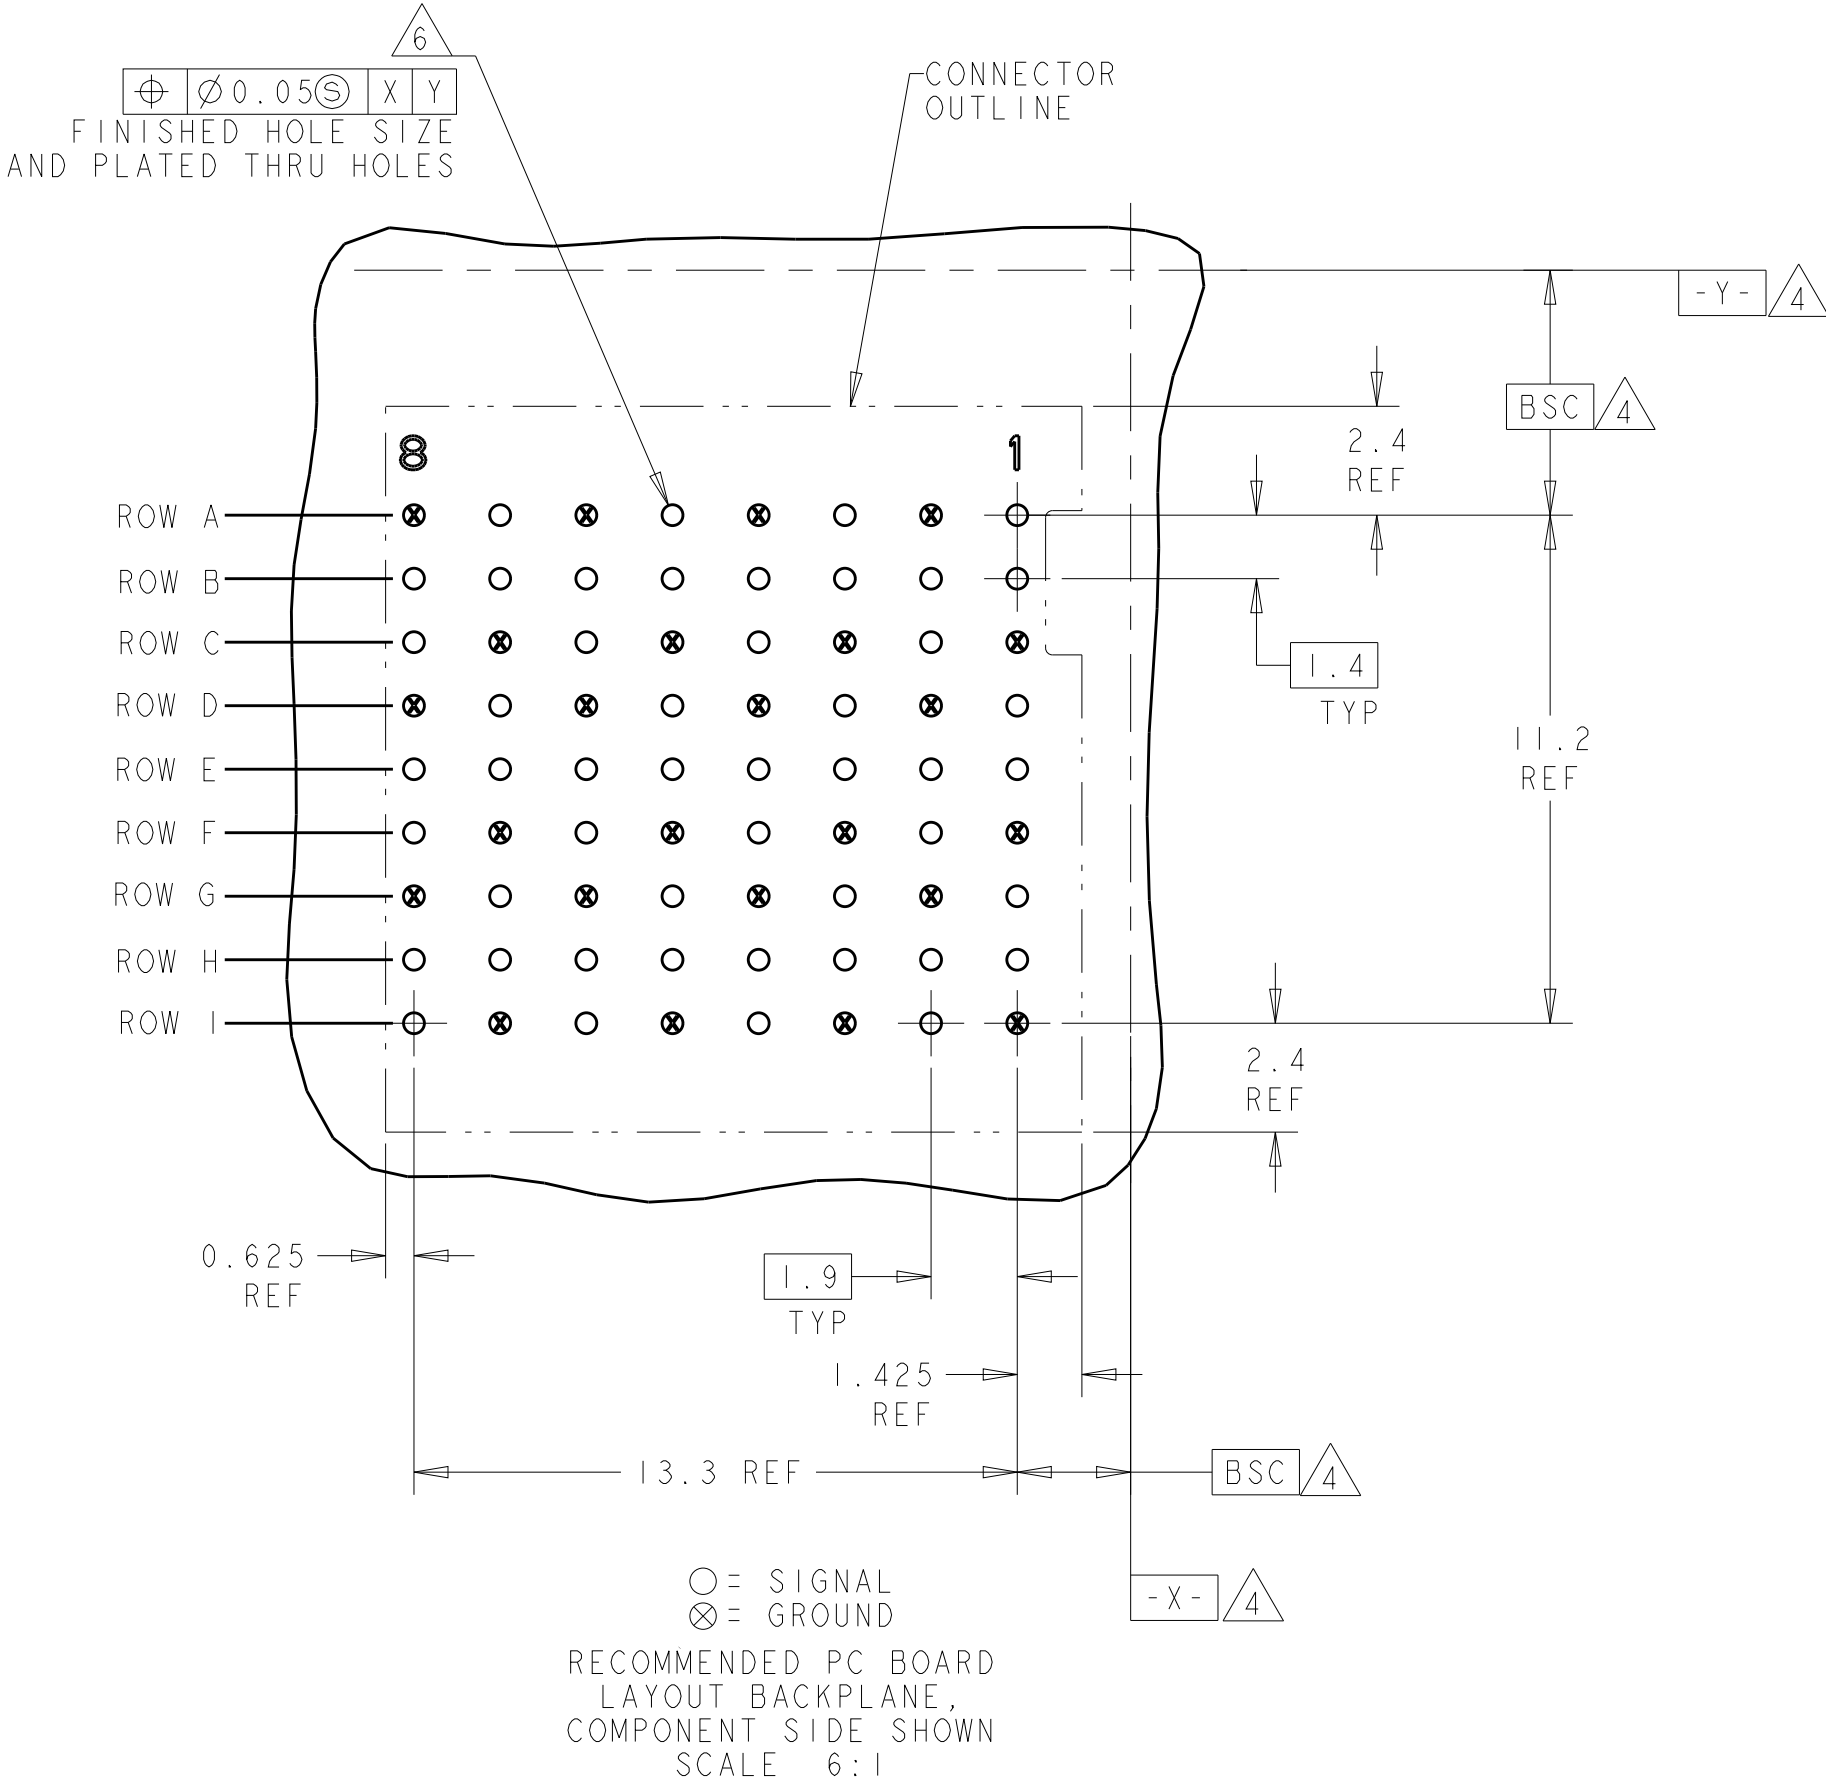

1934791-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	04FEB2008	TE Connectivity		
DIMENSIONS:		CHK R. PATTERSON	04FEB2008			
mm		APVD R. PATTERSON	04FEB2008	NAME HEADER ASSEMBLY, OPEN ENDED, 3 PAIR, 8 COLUMN TinMan		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
		0 PLC ±		APPLICATION SPEC		
		1 PLC ±		SIZE		
		2 PLC ±		CAGE CODE		
		3 PLC ±		DRAWING NO		
		4 PLC ±		RESTRICTED TO		
		ANGLES ±		A100779C=1934791		
MATERIAL		FINISH		WEIGHT		
				CUSTOMER DRAWING		
				SCALE 10:1		
				SHEET 1 OF 1		
				REV E		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1934791-1](#)