
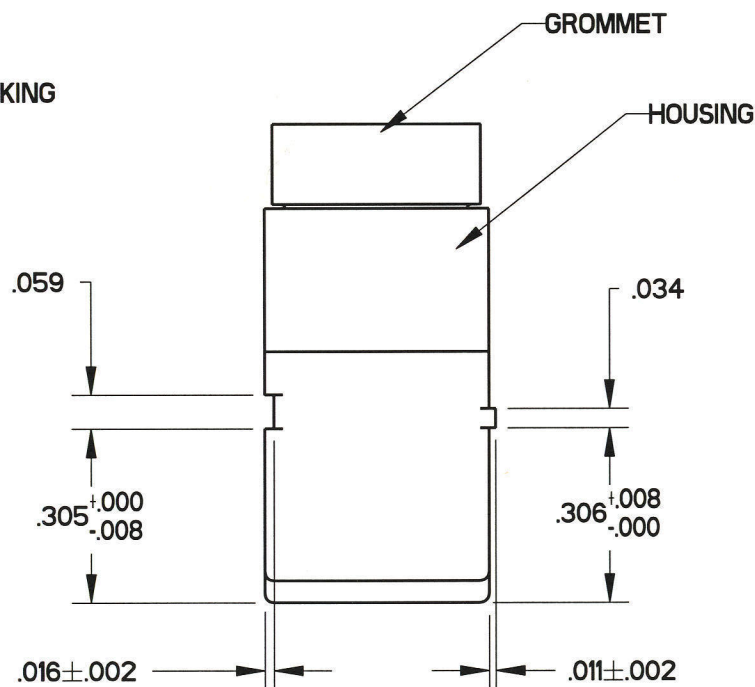
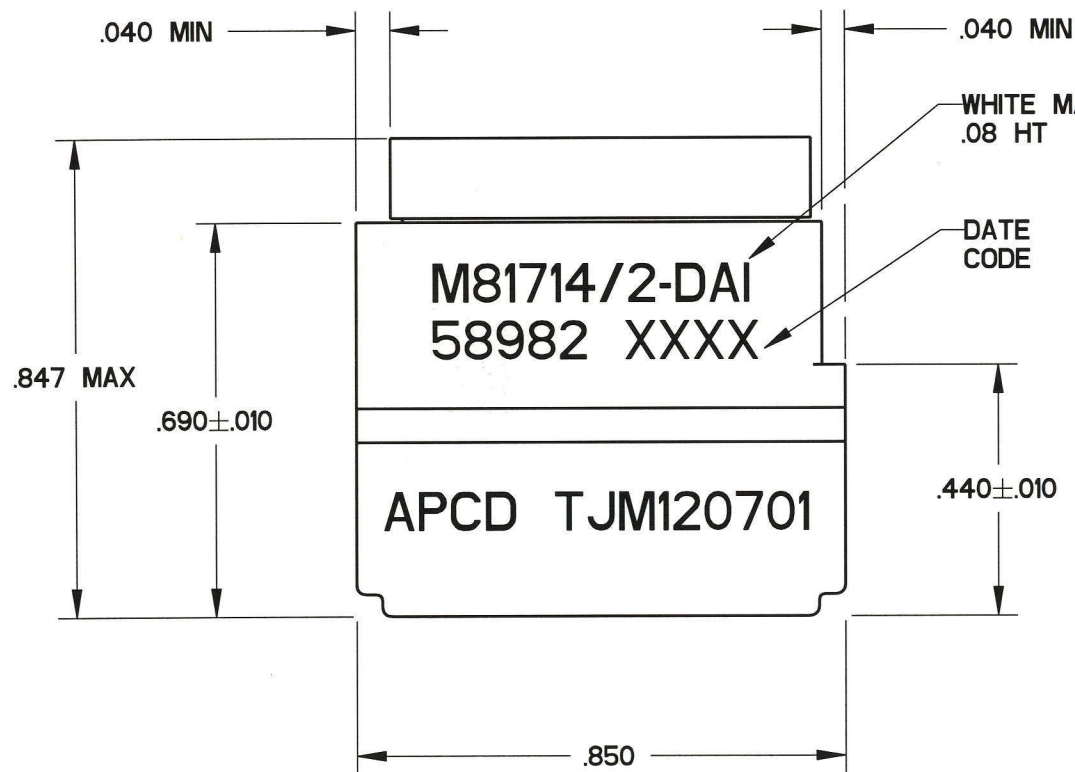
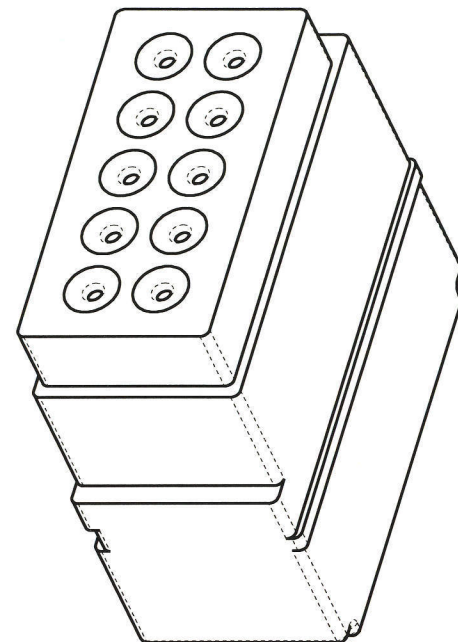


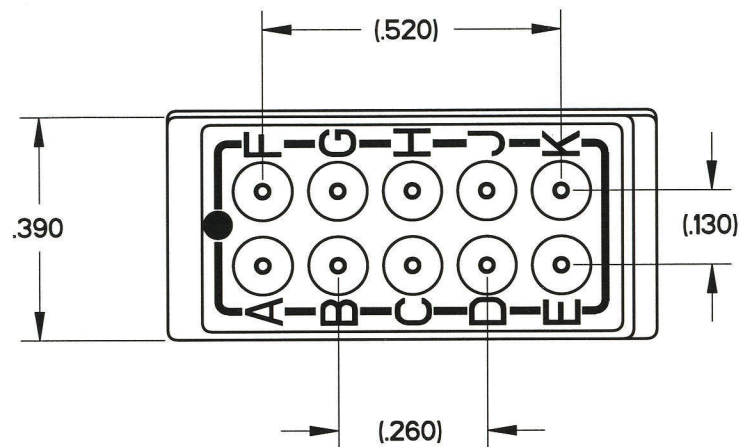

- NOTES:
- PERFORMANCE:
 - A) MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/2
 - B) MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.
 - C) DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
 - D) OPERATING TEMPERATURE: -65 C TO 200 C.
 - E) CURENT RATING: 7.5 AMPS
 - F) VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8
 - MATERIALS:
 - A) HOUSING - POLYETHERIMIDE, COLOR: BLACK.
 - B) GROMMET - SILICONE ELASTOMER, COLOR: BLUE
 - C) INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED
 - D) CONTACT RETAINERS - STAINLESS STEEL.

APCD P/N	SUPPLIED				MARKING		CLASS
	QTY.	MIL. P/N	APCD P/N	QTY.	APCD P/N	APCD QPL NO.	
TJM120601	--	--	--	--	--	TJM120701	M81714/2-DA1
TJM120701	11	M39029/H-101	CNP006000	2	CNA032401		

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd SPECIFICATION DRAWING		TITLE TERMINAL JUNCTION MODULE SZ 20 FEEDBACK DA1			
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°							
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA	ENGR R. SWAINE 03/01/06	SIZE B	DWG NO. TJM120601		REV C		
		APPD 	CODE: 58982		SCALE: 3:1	SHEET 1 OF 1		

Amphenol Pcd

SPECIFICATION DRAWING

DRWN

A. SWEEZEY 03/09/06

ENGR

R. SWAINE 03/01/06

APPD

Jade to 4-13-06

TITLE

TERMIAL JUNCTION
MODULE
SZ 20 FEEDBACK DA1

SIZE

B

DWG NO.

TJM120601

REV

C

CODE: 58982

SCALE: 3:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[TJM120601](#)